

Photometric test report

Family
Streetlight 21 mini LED



Order number: 5XE2B33T08JB
EAN: 4058352724484

Version

Optic

Cover

Lamps

Controlgear

Rated values

post-top or side-entry mounting, Smart Interface up/down

asymmetric, wide distribution (ST0.5a G)

toughened safety glass

LED 3000 K | CRI ≥ 70


EVG-Smart Interface

Net luminous flux = 12940 lm
Power consumption = 88.6 W
Luminous efficacy = 146 lm/W

LP number
59074_734

serial
documentation
22.10.2024


siteco

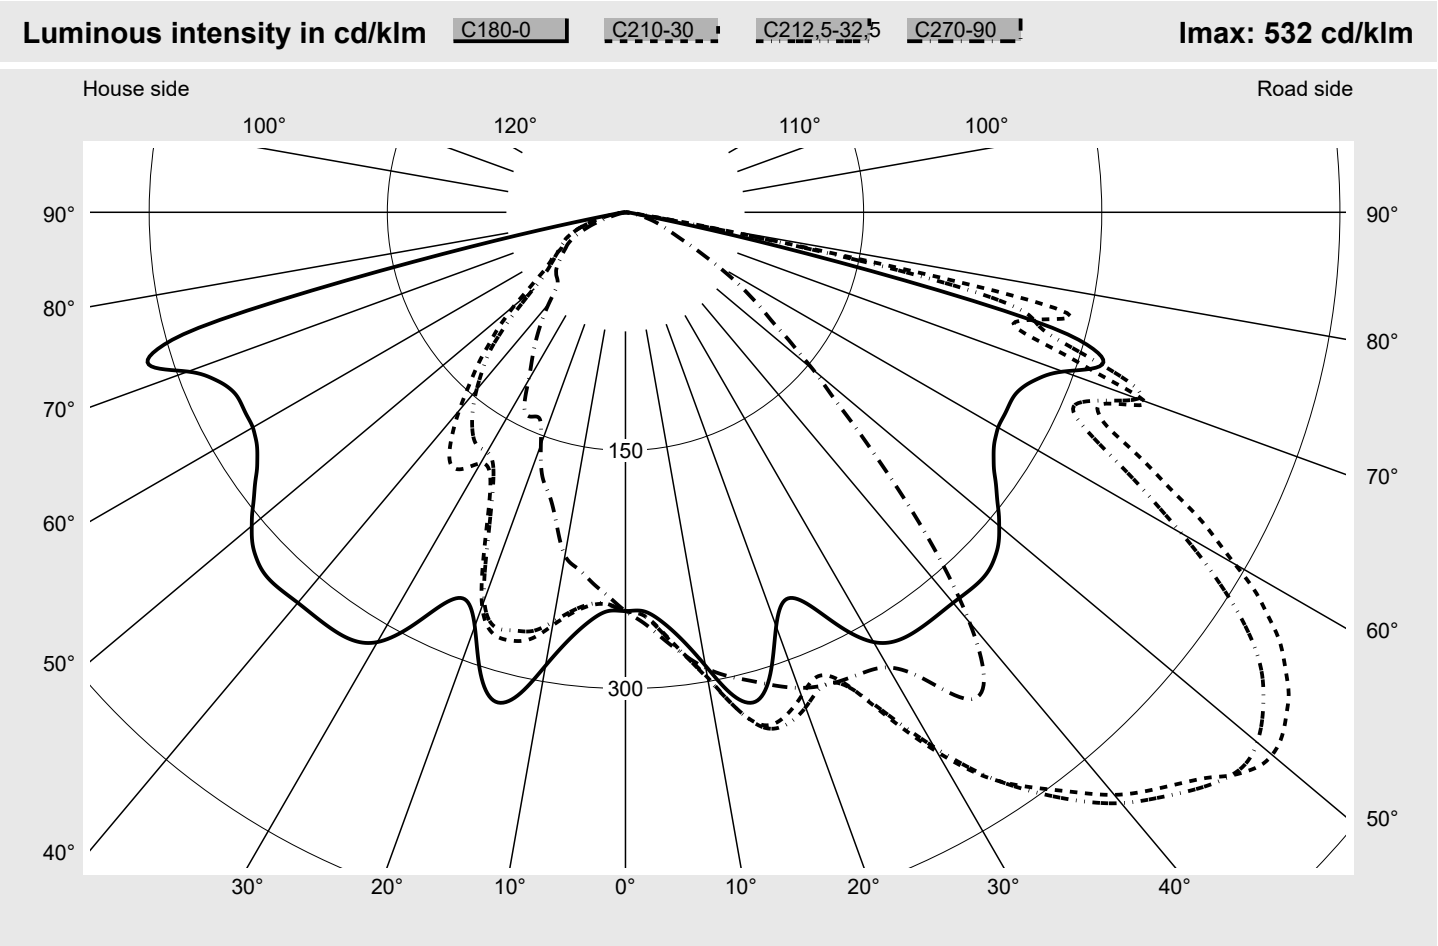

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G4
Eta 0° - 90°	100.0%	Imax 70°	466.0
Eta 90° - 180°	0.0%	Imax 80°	84.5
Measurement conditions		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
		DIN EN 13032 and DIN 5032	

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08JB EAN: 4058352724484	LP number 59074_734
Envelope curve in cd/klm KMK 50° KMK 49° KMK 48° KMK 47°		sit eco

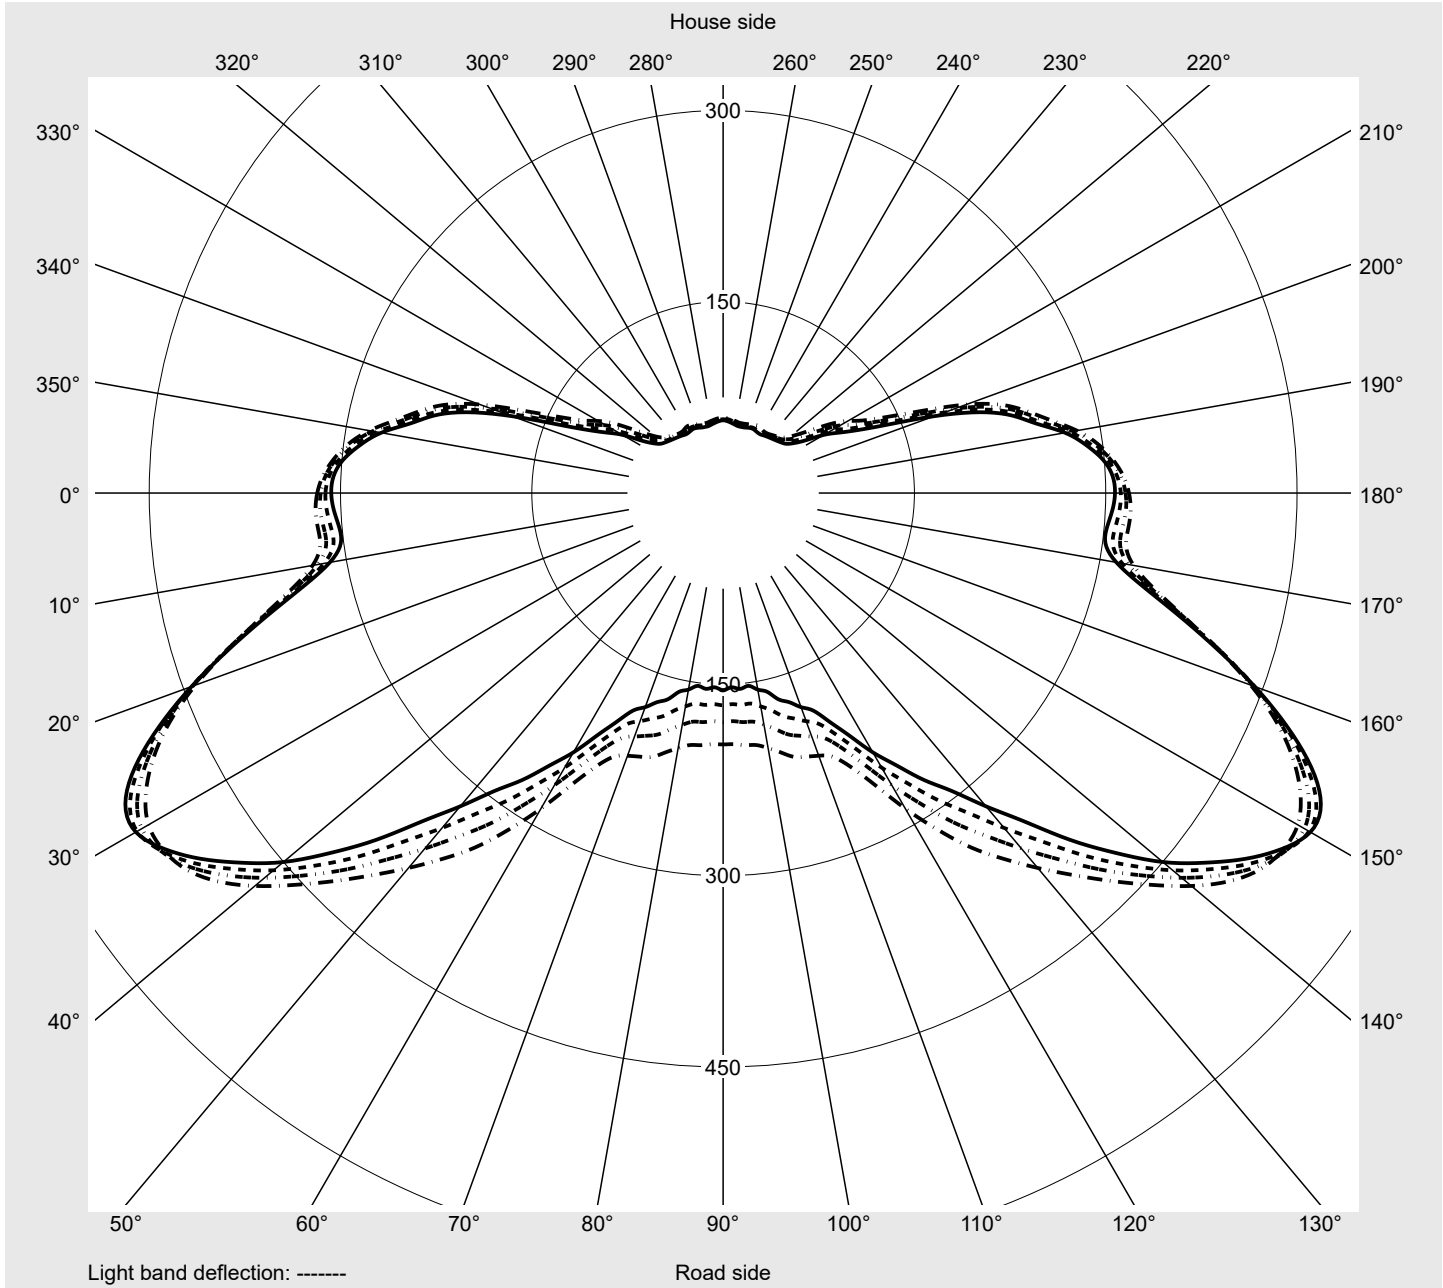

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08JB EAN: 4058352724484	LP number 59074_734
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	251.4	251.6	251.8	252.0	252.2	252.5	252.7	252.9	253.1	253.4	253.5	253.8	254.0	254.1	254.3
5,0°	258.5	259.1	259.9	260.7	261.4	261.9	262.2	262.4	262.9	263.3	263.8	264.5	265.1	265.8	266.0
7,5°	271.3	272.4	273.6	274.3	275.1	275.2	275.8	276.2	277.2	277.8	278.9	279.5	280.4	280.6	281.2
10,0°	290.0	291.7	292.5	293.3	293.3	293.7	293.8	294.8	295.2	296.2	296.6	297.4	297.4	298.3	298.3
12,5°	311.3	313.3	313.5	314.3	313.7	314.5	314.5	316.0	316.4	317.8	318.0	319.1	319.2	319.3	319.7
15,0°	318.8	319.0	318.7	318.1	317.6	318.1	319.4	321.2	323.3	325.6	328.2	331.2	334.4	335.9	338.6
17,5°	304.0	303.9	303.0	302.2	302.2	303.6	305.8	308.9	312.5	317.0	321.9	327.5	333.1	338.1	342.9
20,0°	277.5	279.5	278.2	279.7	280.3	283.9	286.4	291.6	295.9	303.0	309.1	317.6	324.2	331.8	337.5
22,5°	264.0	267.6	270.2	273.0	276.7	280.1	284.1	288.4	294.0	299.7	305.5	311.0	316.4	323.3	328.1
25,0°	272.6	278.4	284.8	289.0	294.6	297.4	303.0	307.0	314.1	318.1	323.3	324.9	327.7	329.1	329.6
27,5°	295.0	303.0	310.2	315.7	320.4	324.5	330.3	337.3	345.3	352.0	357.0	359.1	358.7	356.0	352.1
30,0°	312.6	321.6	329.3	334.8	339.7	345.3	353.5	363.4	374.5	384.0	390.8	393.4	392.3	389.1	384.2
32,5°	319.6	328.7	336.2	341.5	346.5	353.7	364.6	378.0	392.2	404.9	414.2	419.5	421.4	420.1	417.0
35,0°	321.1	329.9	336.8	341.5	346.4	355.1	368.4	384.8	401.8	417.0	428.5	436.4	441.7	445.0	445.9
37,5°	321.0	329.2	335.1	339.0	344.3	354.7	370.4	388.9	408.1	425.7	439.8	450.7	459.9	467.0	470.9
40,0°	321.1	328.1	332.6	335.4	341.2	353.8	371.8	392.6	413.9	433.7	451.2	466.8	479.0	485.8	489.2
42,5°	322.0	327.4	330.2	331.7	338.2	353.2	373.9	397.4	421.9	445.7	466.4	482.2	493.0	499.6	503.4
45,0°	321.7	325.2	325.9	326.2	333.4	350.6	374.7	402.9	432.6	459.9	481.2	496.2	506.0	512.5	514.5
46,0°	320.4	323.0	322.9	323.1	330.8	348.8	374.6	404.9	436.7	465.0	486.8	502.2	512.4	517.0	515.5
47,0°	318.3	319.8	318.9	318.7	326.8	346.0	374.0	406.7	440.3	469.9	493.1	510.3	520.3	520.6	514.2
48,0°	315.5	316.1	314.3	314.0	322.6	343.2	373.1	407.5	442.4	473.6	498.8	517.8	526.3	522.6	510.9
49,0°	311.8	311.1	308.7	308.2	317.7	339.8	371.5	407.1	443.4	476.8	504.5	524.3	530.6	522.1	506.0
50,0°	307.3	305.5	302.3	302.4	313.1	336.8	369.4	405.8	443.5	478.7	508.9	528.4	531.7	519.4	500.0
51,0°	302.6	299.8	296.4	297.2	309.2	334.1	367.1	403.9	442.8	480.1	511.8	530.6	530.3	515.2	493.5
52,0°	297.4	293.5	290.1	292.2	305.7	331.6	365.0	402.3	442.5	481.8	514.3	530.3	526.6	509.6	486.2
53,0°	292.7	288.2	284.9	288.3	303.2	330.1	363.8	401.8	443.4	483.8	515.5	527.9	521.7	503.1	477.1
54,0°	288.2	283.2	280.2	285.0	301.4	329.2	363.5	402.6	445.7	486.4	515.8	524.7	516.4	495.7	465.9
55,0°	283.4	278.2	275.8	282.2	300.2	329.3	364.6	405.4	449.7	489.9	514.5	518.9	508.3	485.8	451.7
56,0°	279.7	274.5	272.9	280.7	300.1	330.3	366.8	409.4	454.6	493.0	512.5	512.6	499.7	473.3	435.0
57,0°	276.5	271.6	271.0	280.2	300.9	332.6	370.0	415.0	460.3	495.6	510.2	504.8	489.8	458.4	417.8
58,0°	274.0	269.6	269.9	280.6	302.6	335.7	375.0	421.7	467.1	497.5	505.6	496.5	476.1	441.5	399.8
59,0°	272.3	268.4	269.7	281.8	305.1	339.6	380.6	429.2	473.6	498.4	500.6	486.7	462.3	423.6	381.6
60,0°	271.0	267.7	270.0	283.5	308.5	345.4	389.0	439.3	480.2	497.4	492.4	473.1	443.3	404.4	363.7
61,0°	270.6	267.5	270.6	285.5	312.1	351.4	397.6	448.8	485.1	494.7	483.7	459.2	425.6	385.0	346.3
62,0°	270.6	267.6	271.4	287.9	316.3	358.2	407.0	458.0	489.0	491.0	474.6	445.2	408.3	366.8	330.9
63,0°	270.5	267.9	273.2	291.1	321.6	366.4	418.0	467.2	490.5	484.2	462.0	427.4	386.7	348.6	316.4
64,0°	270.4	268.7	275.7	295.6	327.7	374.6	428.6	473.9	489.8	477.0	449.7	410.9	368.6	331.5	304.6
65,0°	271.0	270.8	279.3	302.0	335.3	384.9	439.6	479.8	487.1	467.0	436.2	391.2	350.1	317.6	297.1
66,0°	272.9	273.8	284.7	309.3	344.5	395.6	449.6	482.9	481.7	457.1	420.5	374.1	332.4	308.9	295.5
67,0°	275.8	277.6	290.5	317.8	353.5	405.6	457.2	482.8	475.7	446.4	406.8	361.1	323.7	308.7	303.1
68,0°	280.0	283.6	299.2	329.0	364.2	415.9	463.1	478.8	466.2	433.5	393.9	353.0	322.9	317.1	320.0
69,0°	285.2	290.3	309.4	341.5	376.0	425.6	465.8	471.9	453.2	418.4	384.3	356.2	337.9	331.0	338.2
70,0°	293.3	300.8	322.8	358.3	390.0	435.5	466.0	461.7	438.8	394.0	359.3	335.9	348.2	343.3	350.0
71,0°	304.7	313.5	340.2	376.2	407.0	443.9	462.4	451.1	422.5	374.2	327.5	302.7	319.0	340.6	352.8
72,0°	314.0	325.0	356.5	392.8	420.5	448.6	456.5	440.5	406.8	354.4	302.6	275.3	291.8	320.9	339.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08JB EAN: 4058352724484	LP number 59074_734
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	254.5	255.2	255.3	255.7	256.0	256.3	256.5	256.6	256.8	257.1	257.2	257.4	257.6	257.9	258.1
5,0°	266.8	266.8	267.7	267.7	268.1	268.3	268.3	269.0	268.7	269.2	269.1	269.1	269.6	269.3	269.8
7,5°	281.5	281.9	282.2	282.3	282.5	282.3	282.6	282.4	282.6	282.3	282.3	282.2	282.1	282.1	281.8
10,0°	299.0	299.0	299.4	299.2	299.3	299.1	298.9	298.6	297.9	297.4	296.6	296.2	295.4	295.0	294.2
12,5°	320.1	320.4	320.2	320.1	319.1	318.7	316.9	316.2	313.9	313.0	310.8	309.6	307.6	306.3	304.8
15,0°	340.5	342.3	342.5	342.7	341.0	339.6	336.2	333.6	329.9	327.1	324.0	321.5	318.9	316.6	314.3
17,5°	347.6	351.7	355.2	357.7	358.7	358.2	355.7	352.1	347.1	341.9	336.9	332.7	329.1	326.0	323.3
20,0°	344.0	349.0	354.3	358.3	362.0	364.4	365.8	365.4	362.8	358.1	352.0	345.7	340.3	336.0	332.6
22,5°	333.1	337.7	342.8	347.5	352.4	356.8	361.0	364.1	366.0	365.5	362.5	356.9	350.4	344.3	339.5
25,0°	329.4	330.1	331.6	334.3	338.1	342.8	348.1	353.2	358.0	362.0	364.1	363.2	359.0	352.4	345.9
27,5°	347.1	342.4	337.9	334.9	333.7	335.2	339.0	344.3	350.0	355.4	359.9	362.5	362.1	357.5	350.6
30,0°	377.6	370.2	362.4	355.6	350.3	346.8	345.3	346.0	348.8	352.7	356.7	360.3	362.3	360.7	355.3
32,5°	412.1	406.0	399.9	393.2	385.5	376.4	368.0	361.2	357.4	356.7	358.4	361.6	365.2	367.2	365.5
35,0°	445.2	443.0	439.0	431.9	422.2	410.4	397.9	385.7	375.9	369.9	368.9	371.8	377.7	383.7	387.2
37,5°	472.4	471.4	467.7	461.4	453.1	442.5	429.5	414.4	399.0	386.7	380.4	380.7	385.1	390.8	393.5
40,0°	490.9	490.6	487.8	482.0	472.7	459.3	442.4	423.2	402.3	384.3	371.8	367.6	367.3	369.0	367.2
42,5°	504.6	501.5	492.9	479.9	462.7	443.9	422.9	403.6	384.1	366.5	349.1	336.5	326.0	321.7	315.5
45,0°	509.3	495.9	476.2	454.4	432.2	412.0	393.9	376.2	354.9	330.8	303.3	280.0	264.2	258.0	254.7
46,0°	506.0	488.6	465.7	442.2	419.6	399.4	380.0	359.9	335.5	308.8	279.8	256.5	242.0	236.8	234.7
47,0°	500.0	479.3	454.7	430.1	406.2	383.7	361.6	339.3	312.9	285.7	258.2	237.0	223.7	219.2	216.7
48,0°	492.2	469.3	443.6	417.2	389.6	363.9	338.8	315.4	289.2	264.4	240.1	220.7	208.0	203.1	199.5
49,0°	484.2	460.2	432.1	402.5	370.7	342.8	316.4	294.0	270.2	248.6	226.6	208.7	195.9	190.4	185.4
50,0°	476.1	450.1	417.7	384.5	349.1	320.7	294.4	274.7	253.3	234.8	214.4	198.1	184.6	178.7	171.9
51,0°	467.8	437.8	401.4	364.5	328.5	299.9	276.0	257.4	239.3	222.4	204.3	188.2	175.0	167.5	160.2
52,0°	457.4	423.0	383.1	344.8	309.6	282.2	260.0	243.2	227.2	212.1	195.3	179.8	166.7	158.1	149.7
53,0°	443.8	405.3	363.8	325.7	291.9	265.9	245.7	230.6	216.0	202.5	187.0	172.3	159.0	149.4	140.7
54,0°	428.1	387.1	345.8	309.3	277.5	253.4	234.8	220.4	207.1	195.0	180.9	166.7	153.5	143.0	133.9
55,0°	410.0	368.3	328.4	294.2	265.3	243.1	225.4	211.9	199.8	188.7	175.6	161.9	148.8	138.0	128.2
56,0°	391.1	349.9	312.1	281.0	255.2	234.3	217.6	204.9	193.5	182.9	170.4	157.5	145.2	134.1	122.3
57,0°	373.4	333.9	298.4	271.2	247.6	228.4	212.3	199.8	188.0	177.6	165.5	153.2	138.6	125.2	112.7
58,0°	356.4	319.3	287.3	263.4	241.9	224.0	207.9	195.1	182.2	171.2	157.6	144.2	126.7	114.4	101.8
59,0°	340.7	306.5	278.8	257.3	238.1	220.4	204.2	190.2	175.6	161.9	146.1	131.3	116.0	104.2	93.4
60,0°	325.9	296.1	272.2	253.2	235.7	217.9	200.6	184.6	166.5	150.4	134.5	120.6	106.1	94.9	84.6
61,0°	312.5	287.5	267.4	250.8	234.2	215.9	196.6	177.2	155.5	138.2	122.5	108.9	95.1	84.8	75.4
62,0°	302.1	281.5	265.0	250.0	233.6	214.3	191.9	168.6	144.8	126.9	111.2	98.0	84.9	75.4	67.0
63,0°	293.6	277.8	264.6	250.2	233.1	211.9	185.6	158.6	133.4	115.1	99.6	86.9	74.9	66.3	59.0
64,0°	287.9	276.4	265.7	251.2	232.0	207.6	177.0	147.1	120.7	102.2	86.8	75.0	64.4	57.1	51.1
65,0°	286.2	278.1	268.2	252.3	229.3	200.7	166.8	135.7	108.3	90.0	74.9	64.5	55.2	49.5	44.7
66,0°	290.2	283.6	272.4	252.8	224.6	191.8	155.1	123.5	95.1	77.8	63.3	54.9	46.9	43.1	38.8
67,0°	303.0	294.6	277.9	251.9	218.0	181.4	143.6	110.6	82.9	66.0	54.1	46.7	40.6	37.4	34.6
68,0°	323.3	310.3	284.7	249.4	208.9	169.9	131.3	98.3	71.0	56.0	46.4	40.5	35.8	33.6	31.4
69,0°	341.6	325.4	290.9	245.8	198.9	157.2	118.2	85.5	59.7	47.2	40.0	35.7	32.1	30.5	28.7
70,0°	351.0	334.0	294.4	242.7	190.7	145.5	105.0	74.1	51.0	40.4	35.4	32.6	29.9	28.5	27.0
71,0°	353.1	334.3	293.7	239.1	183.2	133.0	91.3	63.9	43.1	35.1	31.9	30.2	28.2	27.2	25.7
72,0°	340.8	321.4	280.1	228.4	172.1	118.6	79.0	54.3	37.2	30.9	29.1	27.8	26.6	25.8	24.2

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08JB EAN: 4058352724484	LP number 59074_734
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	258.3	258.5	258.7	258.7	258.8	258.8	258.8	251.1	250.9	250.6	250.3	250.0	249.7	249.4	248.9
5,0°	269.8	269.6	270.1	269.6	269.8	270.0	269.5	258.0	257.4	256.9	256.1	255.3	254.3	253.5	252.5
7,5°	281.9	281.5	281.5	281.3	281.2	281.3	281.0	270.1	269.2	268.1	267.0	265.5	264.1	262.5	261.0
10,0°	293.6	292.9	292.4	292.1	291.8	291.7	291.5	288.5	286.7	285.2	283.2	281.4	278.9	276.7	274.1
12,5°	303.5	302.3	301.1	300.5	299.8	299.7	299.3	310.0	307.5	305.8	303.1	300.8	297.4	294.4	290.7
15,0°	312.2	310.3	308.6	307.3	306.3	305.8	305.5	318.1	317.0	315.8	314.3	312.5	309.9	306.7	302.7
17,5°	320.8	318.7	316.6	314.9	313.6	312.9	312.5	303.9	303.5	303.6	303.7	303.7	302.7	301.1	298.0
20,0°	329.5	326.9	324.3	322.1	320.3	319.2	318.7	277.4	274.6	275.3	273.9	276.0	274.8	276.0	271.7
22,5°	335.5	332.4	329.5	327.1	324.9	323.4	322.8	259.3	253.9	250.2	247.3	246.9	246.2	244.7	241.5
25,0°	340.5	336.3	332.8	329.9	327.4	325.7	325.0	263.5	254.7	246.2	239.8	235.5	230.5	225.4	223.6
27,5°	343.8	338.2	333.8	330.7	328.5	327.0	326.5	284.7	273.6	263.2	254.7	247.3	238.2	232.0	227.2
30,0°	348.2	341.9	337.0	334.0	332.2	331.4	331.0	301.9	290.7	280.5	272.3	262.9	254.7	248.5	238.0
32,5°	360.2	355.8	351.6	349.9	348.4	348.6	347.9	309.7	300.0	291.5	283.5	274.8	268.8	260.6	246.0
35,0°	385.1	381.9	377.7	375.5	374.1	374.5	374.1	312.0	303.8	297.0	288.8	281.7	275.4	263.4	249.1
37,5°	390.5	383.7	377.4	372.6	370.8	370.4	370.9	312.5	305.2	298.7	290.6	283.5	273.8	259.9	247.4
40,0°	362.2	352.4	345.4	339.0	337.3	335.9	337.1	313.2	306.3	298.9	290.6	281.8	268.4	254.3	243.0
42,5°	311.2	301.1	295.9	289.7	289.1	286.7	288.6	315.1	308.1	299.4	289.1	277.2	261.4	248.0	235.0
45,0°	252.5	246.7	242.1	237.9	236.9	235.4	235.5	316.0	308.4	298.9	285.9	270.6	254.2	239.7	220.5
46,0°	232.6	227.0	222.0	217.8	216.9	215.4	215.4	315.3	307.7	297.9	284.1	267.2	250.8	235.2	212.3
47,0°	214.1	208.2	203.1	199.3	198.5	197.1	197.1	313.9	306.4	296.1	281.7	263.4	247.1	229.7	202.8
48,0°	195.9	189.6	184.6	180.8	180.3	179.0	179.6	312.0	304.7	293.9	279.1	259.8	243.5	224.0	193.7
49,0°	181.0	174.4	169.8	166.5	166.7	165.7	166.4	309.1	302.3	291.0	276.0	255.8	239.3	217.5	184.7
50,0°	167.4	159.6	156.5	152.5	154.1	152.4	154.5	305.7	299.1	287.3	272.2	251.6	234.7	210.7	176.2
51,0°	153.5	146.0	142.0	139.4	140.5	140.4	140.9	301.9	295.3	283.0	268.0	247.0	229.5	203.9	168.4
52,0°	141.1	133.1	130.1	128.6	130.1	129.9	130.2	297.6	291.0	277.8	262.7	241.6	223.6	196.8	161.0
53,0°	130.9	122.6	119.8	118.1	119.2	118.6	118.5	293.3	286.5	272.0	255.9	235.2	217.1	190.0	154.2
54,0°	123.7	115.2	111.8	110.1	110.8	110.1	110.2	289.1	281.9	266.2	248.3	227.2	208.9	182.0	147.2
55,0°	118.0	109.8	105.9	103.8	104.2	103.2	103.2	284.5	277.0	260.5	241.3	219.3	199.2	172.0	139.0
56,0°	110.9	102.4	98.4	96.7	96.8	95.7	95.4	280.7	272.7	255.6	235.4	213.0	191.1	161.6	128.9
57,0°	102.6	95.2	91.9	90.2	90.1	88.6	88.5	277.2	268.6	250.5	229.7	206.7	183.9	152.1	118.2
58,0°	94.4	87.5	85.0	82.7	83.0	80.3	81.0	274.4	265.0	246.0	224.3	200.7	176.7	144.3	109.6
59,0°	86.1	79.9	77.1	75.6	75.1	72.8	73.0	272.3	261.9	241.7	219.4	195.0	169.8	136.9	102.7
60,0°	78.0	72.0	69.8	68.6	68.0	65.4	65.6	270.6	259.0	237.5	214.4	189.3	162.7	129.3	96.0
61,0°	69.3	63.9	62.0	61.1	60.2	57.8	58.0	269.8	257.2	234.3	210.2	184.0	156.4	122.6	89.9
62,0°	61.6	56.8	55.4	54.7	53.6	51.4	51.7	269.3	255.6	231.4	205.7	178.1	149.7	115.9	84.1
63,0°	54.4	50.5	49.5	48.9	47.5	45.9	45.9	268.5	253.0	227.3	198.8	168.6	139.9	107.9	78.4
64,0°	47.4	44.3	43.7	43.0	41.7	40.3	40.4	267.9	249.9	221.4	188.2	152.7	123.7	95.7	72.6
65,0°	41.9	39.5	39.2	38.4	37.5	36.1	36.2	268.2	247.1	214.7	175.8	132.6	102.0	78.9	64.7
66,0°	37.2	35.1	35.5	34.5	34.0	32.5	33.0	269.3	245.8	209.9	164.1	114.6	81.9	65.2	55.6
67,0°	33.3	32.3	32.4	31.8	30.8	29.9	30.0	271.6	246.3	206.5	154.8	100.7	68.8	55.9	48.4
68,0°	30.5	29.9	30.1	29.3	28.5	27.8	27.9	275.4	248.4	203.4	145.5	89.3	61.2	50.5	43.3
69,0°	28.2	27.7	27.6	26.7	26.1	25.6	25.7	281.3	252.5	201.3	137.0	80.0	57.0	47.2	40.0
70,0°	26.4	25.7	25.2	24.4	23.9	23.6	23.8	290.6	259.0	199.5	127.7	71.5	53.8	44.0	37.1
71,0°	24.8	23.6	23.0	22.1	21.8	21.3	21.7	302.4	269.3	198.6	117.5	65.4	51.1	41.1	34.1
72,0°	23.1	21.9	21.0	20.1	19.6	19.3	19.7	312.8	278.4	195.4	107.3	62.3	49.3	38.5	31.3

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08JB EAN: 4058352724484	LP number 59074_734
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	248.5	248.2	247.7	247.4	247.1	246.6	246.4	246.0	245.7	245.4	245.0	244.8	244.4	244.0	243.8
5,0°	251.7	250.7	249.4	248.5	247.6	246.7	245.8	245.0	244.1	243.3	242.5	241.7	240.8	240.1	239.3
7,5°	259.4	257.8	255.9	254.4	253.0	251.4	249.9	248.4	246.9	245.4	244.0	242.7	241.2	239.8	238.3
10,0°	272.0	269.3	267.0	264.2	261.8	259.2	256.8	254.2	251.0	247.7	244.3	241.3	238.7	236.2	234.2
12,5°	287.1	283.0	278.9	275.2	270.1	264.7	259.6	255.2	251.4	248.2	245.3	242.3	239.3	235.6	232.1
15,0°	298.1	292.7	286.2	279.2	272.6	267.4	262.6	258.4	253.5	247.2	240.8	233.4	227.0	220.2	214.8
17,5°	293.5	287.2	281.6	278.1	273.7	268.4	260.8	251.8	242.2	232.8	224.7	217.7	212.0	206.8	202.2
20,0°	269.2	265.6	265.8	264.0	260.1	252.8	245.2	237.0	229.9	222.7	216.0	210.0	205.0	200.1	195.3
22,5°	241.7	241.5	239.4	233.2	227.5	222.8	219.9	218.0	216.8	215.4	212.1	206.4	199.4	191.8	184.4
25,0°	223.2	218.5	211.6	203.3	198.8	195.8	195.4	196.9	198.4	198.3	196.6	193.2	187.7	180.6	173.1
27,5°	218.3	205.8	194.7	185.1	180.4	178.4	176.8	174.2	171.6	170.3	170.7	172.4	174.2	174.9	173.6
30,0°	222.5	207.0	193.8	182.6	174.2	164.6	155.1	147.8	144.0	144.6	149.1	156.6	165.0	171.4	173.4
32,5°	230.4	216.3	203.8	191.8	174.0	153.9	137.0	126.3	123.6	127.5	134.9	143.0	149.6	155.6	159.2
35,0°	236.2	224.9	211.8	192.5	168.0	146.3	129.8	118.7	112.9	112.0	115.0	120.7	126.5	130.5	132.9
37,5°	236.8	224.4	204.4	180.2	158.1	141.0	127.9	116.9	106.9	98.7	94.7	95.3	98.8	104.0	109.2
40,0°	231.1	211.2	184.8	162.9	145.9	134.1	122.9	109.8	96.3	86.5	79.0	75.7	76.6	82.7	88.8
42,5°	215.3	187.2	161.8	144.2	132.4	122.2	109.1	95.8	84.2	75.0	68.5	65.6	65.5	68.3	72.9
45,0°	190.7	161.2	139.6	127.0	117.5	104.6	91.1	80.0	71.4	66.1	63.2	61.5	60.6	60.8	62.5
46,0°	179.4	150.8	131.3	119.4	109.1	95.3	83.1	73.6	67.2	63.9	61.8	60.4	59.3	59.1	59.9
47,0°	168.1	140.9	123.2	113.0	101.5	87.5	76.6	69.0	64.5	62.3	60.7	59.5	58.4	57.9	58.1
48,0°	157.9	132.2	115.8	106.2	92.5	80.2	70.6	65.5	62.4	60.9	59.5	58.5	57.6	57.0	56.7
49,0°	148.6	124.2	108.9	98.4	84.2	73.3	66.3	62.8	60.9	59.6	58.5	57.5	56.7	56.1	55.5
50,0°	140.6	117.0	102.6	91.3	77.2	68.4	63.4	61.0	59.6	58.4	57.5	56.7	56.0	55.2	54.5
51,0°	133.3	110.2	96.0	82.8	70.5	64.3	60.9	59.3	58.0	57.1	56.3	55.7	54.9	54.2	53.5
52,0°	126.2	103.5	89.3	75.8	65.9	61.4	59.1	57.7	56.7	55.9	55.3	54.8	54.0	53.3	52.6
53,0°	119.8	97.1	82.9	70.2	62.7	59.4	57.5	56.4	55.5	54.8	54.2	53.6	53.0	52.5	51.8
54,0°	113.2	90.5	76.3	64.7	59.8	57.2	55.7	54.8	54.1	53.5	53.0	52.3	51.9	51.5	50.9
55,0°	106.1	84.2	70.2	61.1	57.6	55.5	54.3	53.4	52.7	52.2	51.7	51.2	50.9	50.6	50.1
56,0°	97.9	78.3	65.0	58.3	55.4	53.9	52.6	52.2	51.4	51.0	50.4	50.2	49.9	49.7	49.2
57,0°	87.7	71.8	60.7	55.9	53.6	52.1	51.1	50.6	50.0	49.6	49.2	49.0	48.8	48.8	48.4
58,0°	78.4	64.1	56.6	54.4	52.0	50.7	49.7	49.1	48.6	48.5	48.0	47.9	47.7	47.8	47.5
59,0°	71.7	57.4	51.9	51.6	50.3	49.2	48.2	47.4	46.9	47.0	47.0	46.7	46.6	46.8	46.7
60,0°	66.6	53.1	48.1	48.0	48.7	47.8	46.9	46.1	45.5	45.6	45.7	45.7	45.6	45.8	45.7
61,0°	62.6	50.4	45.9	46.0	47.4	46.7	45.7	44.9	44.3	44.4	44.5	44.7	44.5	44.8	44.7
62,0°	59.1	47.9	44.4	45.1	46.0	45.3	44.3	43.7	43.1	43.0	43.1	43.3	43.3	43.7	43.5
63,0°	55.9	45.7	43.1	44.4	44.7	44.0	43.2	42.6	42.0	41.9	42.0	42.2	42.3	42.5	42.5
64,0°	53.1	43.8	41.7	43.6	43.2	42.7	41.9	41.5	40.9	40.8	40.8	41.1	41.2	41.3	41.2
65,0°	49.9	42.0	40.4	42.3	41.9	41.3	40.7	40.5	40.0	39.8	39.7	40.2	40.3	40.0	40.1
66,0°	46.0	40.1	39.2	41.2	40.5	40.1	39.6	39.3	38.6	38.4	38.5	38.9	39.0	38.9	38.9
67,0°	41.6	38.0	37.9	39.4	38.8	38.4	38.0	37.9	37.3	37.0	36.9	37.4	37.5	37.4	37.3
68,0°	37.9	35.8	36.5	37.5	37.0	36.8	36.6	36.5	36.0	35.6	35.5	36.1	36.4	36.1	35.8
69,0°	35.2	33.6	34.8	35.6	35.1	35.1	34.8	35.0	34.6	34.1	33.8	34.7	34.9	34.1	33.8
70,0°	32.7	31.4	32.6	33.3	33.2	33.0	32.9	33.1	32.8	32.3	32.0	32.9	32.6	31.7	31.9
71,0°	29.9	29.1	30.1	30.9	30.9	31.0	30.9	31.0	30.7	30.4	30.3	30.9	29.9	29.4	29.6
72,0°	27.3	26.7	27.3	28.0	27.9	28.1	27.9	28.0	28.0	28.0	27.9	28.2	27.0	26.8	26.9

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08JB EAN: 4058352724484	LP number 59074_734
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	0.4	0.4
2,5°	243.4	243.3	243.0	242.8	242.8	242.5	242.5	242.4	242.1	242.4	242.1	242.1	242.3	3.0	3.4
5,0°	238.6	237.9	237.3	236.7	236.3	235.9	235.5	235.4	235.1	234.9	234.7	234.6	234.6	6.1	9.5
7,5°	236.8	235.3	233.8	232.5	231.2	230.3	229.3	228.5	227.9	227.3	227.0	226.7	226.7	9.4	18.9
10,0°	232.2	230.4	228.8	227.3	225.9	224.6	223.4	222.3	221.4	220.6	220.2	219.6	219.6	13.0	31.9
12,5°	227.8	224.2	220.1	216.8	213.4	210.6	208.1	205.7	204.1	202.3	201.7	200.6	200.8	16.8	48.6
15,0°	209.6	205.5	201.8	198.6	195.9	193.5	191.4	189.4	187.8	186.4	185.6	184.8	184.8	20.3	68.9
17,5°	198.1	194.4	191.2	188.2	185.6	183.4	181.3	179.2	177.5	175.9	175.0	174.2	174.2	23.4	92.3
20,0°	190.5	185.8	181.2	176.6	172.6	168.7	165.7	162.6	160.3	157.9	156.9	155.5	155.8	25.7	118.0
22,5°	177.4	170.9	165.2	160.0	155.7	151.9	149.1	146.6	144.7	142.8	141.8	141.0	141.0	27.6	145.6
25,0°	166.7	161.7	158.0	155.0	152.6	150.4	148.5	146.8	145.3	144.0	142.8	142.1	142.0	30.1	175.8
27,5°	170.6	166.5	162.1	157.8	153.9	150.5	147.4	144.7	142.6	140.7	139.1	138.1	137.9	33.4	209.2
30,0°	171.2	166.2	160.0	153.7	148.2	142.8	137.9	132.9	129.2	125.8	123.8	122.1	122.1	37.0	246.2
32,5°	159.3	154.0	146.2	137.1	130.5	124.6	120.6	116.8	114.3	111.8	110.6	109.2	109.4	40.6	286.8
35,0°	134.1	133.4	129.8	123.6	117.5	112.4	108.5	105.3	102.6	100.6	99.2	98.3	98.2	44.2	330.9
37,5°	113.3	115.3	114.5	110.5	105.4	100.4	96.7	93.4	91.0	89.0	87.8	86.8	86.8	47.1	378.0
40,0°	94.4	96.6	97.6	94.4	90.9	85.9	83.0	79.7	78.3	76.2	75.9	74.7	75.2	48.5	426.5
42,5°	77.4	79.8	79.8	77.7	74.6	71.2	68.7	66.9	65.9	65.0	64.6	64.4	64.5	48.6	475.1
45,0°	65.0	66.5	66.1	64.0	61.6	59.9	59.1	58.9	59.3	59.6	60.0	60.3	60.5	33.2	508.4
46,0°	61.4	62.3	61.8	60.0	58.7	58.0	57.7	57.7	58.2	58.7	59.2	59.6	59.8	18.9	527.3
47,0°	59.0	59.5	58.9	58.1	57.5	56.9	56.6	56.6	57.2	57.8	58.5	59.0	59.3	18.7	546.0
48,0°	57.2	57.3	57.3	56.9	56.4	55.7	55.6	55.6	56.3	56.9	57.7	58.2	58.7	18.5	564.5
49,0°	55.7	56.0	56.3	55.9	55.3	54.8	54.7	54.7	55.3	56.0	56.9	57.5	57.9	18.2	582.7
50,0°	54.5	55.0	55.5	55.2	54.6	53.9	53.7	53.7	54.4	55.1	55.9	56.6	57.0	18.0	600.7
51,0°	53.4	53.8	54.5	54.5	53.9	53.0	52.7	52.7	53.2	54.0	54.8	55.5	55.8	17.7	618.4
52,0°	52.5	52.7	53.3	53.8	53.3	52.4	51.8	51.6	52.0	52.7	53.4	54.1	54.4	17.5	635.9
53,0°	51.5	51.7	52.1	52.5	52.6	51.7	50.9	50.5	50.7	51.2	52.0	52.6	52.9	17.2	653.1
54,0°	50.5	50.5	51.0	51.0	51.1	50.8	50.1	49.5	49.4	49.8	50.5	51.0	51.3	17.0	670.1
55,0°	49.6	49.5	50.0	50.0	49.9	49.6	49.4	48.9	48.3	48.4	49.1	49.6	49.9	16.8	686.8
56,0°	48.8	48.5	48.9	48.9	48.6	48.1	48.3	47.8	47.3	47.0	47.8	48.1	48.5	16.5	703.4
57,0°	47.9	47.6	47.7	47.8	47.5	46.9	46.6	46.5	46.0	45.6	46.5	46.9	46.9	16.3	719.7
58,0°	47.0	46.5	46.5	46.6	46.6	45.9	45.3	44.9	44.5	44.3	45.2	45.7	45.5	16.1	735.8
59,0°	46.1	45.2	45.2	45.4	45.5	44.8	44.1	43.5	43.0	42.9	44.1	44.7	44.0	15.9	751.7
60,0°	45.1	44.1	44.1	44.2	44.3	43.8	43.2	42.4	41.8	42.0	43.7	43.9	42.9	15.6	767.3
61,0°	44.1	43.2	42.8	43.2	43.1	42.8	42.2	41.3	40.6	40.7	42.0	42.3	41.7	15.4	782.7
62,0°	43.0	42.2	41.7	41.8	42.0	41.5	41.1	40.3	39.3	39.0	39.9	40.2	40.1	15.2	797.9
63,0°	42.1	41.3	40.8	40.6	40.8	40.2	39.8	39.1	38.0	37.5	38.0	38.3	38.4	15.0	812.9
64,0°	41.1	40.4	39.9	39.5	39.6	38.7	38.3	37.4	36.7	35.6	36.2	36.2	36.7	14.7	827.5
65,0°	40.2	39.9	39.3	38.8	38.4	37.1	36.4	35.6	34.6	33.3	33.6	33.7	34.2	14.4	841.9
66,0°	39.5	39.2	38.9	38.4	36.8	34.7	34.0	33.0	32.0	31.0	31.1	31.2	31.9	14.1	856.1
67,0°	38.3	38.5	38.3	37.0	33.9	31.7	31.2	30.4	29.7	28.3	28.5	28.6	29.2	14.0	870.0
68,0°	36.5	37.3	37.8	34.5	31.1	28.9	28.7	27.6	27.1	25.5	25.8	25.7	26.3	13.9	883.9
69,0°	34.9	35.9	35.7	30.9	27.9	25.4	25.4	24.7	24.6	23.4	23.6	22.9	23.8	13.9	897.8
70,0°	33.0	34.2	32.2	27.4	24.6	22.9	22.4	22.2	22.3	21.5	21.0	20.3	20.8	13.8	911.6
71,0°	30.6	31.8	28.3	23.8	22.1	20.0	19.4	19.4	20.0	19.5	18.3	17.5	17.6	13.6	925.1
72,0°	28.0	27.2	24.1	20.1	18.6	17.2	16.4	16.3	17.3	16.1	15.3	14.7	15.0	13.2	938.3

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08JB EAN: 4058352724484	LP number 59074_734
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	314.2	327.1	363.0	397.4	422.7	442.9	443.9	424.6	388.6	334.2	283.3	254.4	265.4	296.9	310.4
74,0°	302.3	315.4	351.4	383.4	407.0	421.3	422.6	404.3	368.4	319.2	278.5	252.6	254.3	276.8	278.8
75,0°	271.9	282.4	317.5	348.3	373.3	382.5	388.8	372.7	343.4	304.4	279.4	261.8	262.3	267.5	251.6
76,0°	203.4	205.7	235.6	259.9	289.7	298.9	320.0	312.0	301.5	279.0	270.4	271.0	278.1	258.7	216.4
77,0°	127.7	125.1	141.5	158.4	183.6	190.1	209.0	211.9	225.2	227.5	246.7	272.1	287.2	232.7	167.6
78,0°	69.4	62.5	74.1	81.0	106.1	107.6	125.5	119.8	140.1	148.2	182.4	203.3	237.4	175.8	116.2
79,0°	29.2	27.1	30.4	36.2	50.1	55.6	64.6	67.3	83.0	101.9	127.0	132.3	111.3	97.4	67.9
80,0°	12.8	12.6	14.0	17.5	21.8	23.3	28.0	29.0	41.4	56.8	84.5	75.6	49.9	39.4	30.6
81,0°	7.7	8.0	8.9	10.4	11.7	11.5	12.4	12.0	15.1	20.5	28.7	25.3	16.6	15.8	13.4
82,0°	5.8	6.0	6.6	7.2	7.9	7.5	7.7	7.8	8.6	10.6	14.3	13.0	9.1	8.3	8.1
83,0°	4.4	4.5	4.9	5.1	5.5	5.4	5.4	5.6	5.8	6.4	8.8	9.1	7.0	5.9	5.9
84,0°	3.1	3.1	3.3	3.3	3.5	3.5	3.6	3.6	3.8	3.9	4.6	4.7	4.4	4.2	4.3
85,0°	2.4	2.3	2.3	2.3	2.4	2.3	2.5	2.5	2.6	2.6	2.8	2.8	2.9	2.8	3.0
86,0°	1.8	1.8	1.8	1.7	1.8	1.7	1.8	1.6	1.7	1.6	1.8	1.8	1.9	1.8	2.0
87,0°	1.4	1.4	1.4	1.3	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.2	1.2
88,0°	1.1	1.1	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.8
89,0°	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.8	0.8	0.7	0.8	0.7	0.7	0.7	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family
Streetlight 21 mini LED

Order number: 5XE2B33T08JB
EAN: 4058352724484

LP number
59074_734

siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	308.3	289.8	248.1	201.6	148.8	101.1	66.6	46.0	32.7	28.1	26.8	25.7	25.0	24.3	22.6
74,0°	264.8	245.1	208.3	168.0	120.8	81.4	53.7	38.2	29.2	25.7	24.6	23.7	23.1	22.3	20.7
75,0°	221.4	197.5	168.0	137.9	96.7	64.3	42.4	32.1	26.6	23.9	22.7	22.1	21.1	20.4	18.8
76,0°	170.0	141.6	116.1	96.9	66.0	46.5	33.7	27.6	23.9	22.0	20.8	20.3	18.8	18.0	16.6
77,0°	115.1	88.3	66.5	54.7	37.9	29.4	24.9	23.6	21.5	19.9	18.7	18.0	16.1	15.0	13.9
78,0°	76.5	58.2	42.9	33.1	24.2	20.5	19.2	19.7	18.8	17.7	16.6	16.0	13.8	12.5	11.6
79,0°	51.1	41.7	30.0	23.4	18.1	15.9	14.7	15.6	15.2	15.4	14.3	13.4	11.4	10.3	9.3
80,0°	27.2	25.0	20.1	16.4	13.4	11.9	11.1	11.4	11.9	13.0	12.3	11.1	9.1	8.2	7.6
81,0°	11.7	12.0	11.9	11.4	9.8	9.0	8.5	8.7	9.5	10.7	10.3	9.2	7.2	6.5	6.0
82,0°	7.4	7.2	7.5	7.3	6.8	6.7	6.6	6.8	7.5	8.7	8.4	7.3	5.7	5.0	4.6
83,0°	5.7	5.7	5.8	5.1	4.8	4.9	4.8	5.2	5.6	6.5	6.1	5.3	4.3	3.8	3.5
84,0°	4.3	4.5	4.4	3.8	3.4	3.3	3.3	3.6	3.8	4.5	4.3	3.9	3.2	2.9	2.7
85,0°	3.1	3.3	3.2	2.8	2.4	2.3	2.2	2.2	2.3	2.8	2.6	2.5	2.1	2.1	1.9
86,0°	2.0	2.2	2.1	2.0	1.7	1.7	1.5	1.5	1.4	1.5	1.4	1.5	1.4	1.4	1.3
87,0°	1.2	1.4	1.3	1.3	1.1	1.1	1.0	1.0	0.9	1.0	0.9	1.0	0.9	0.9	0.9
88,0°	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6
89,0°	0.6	0.6	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.4	0.4	0.5	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family
Streetlight 21 mini LED

Order number: 5XE2B33T08JB
EAN: 4058352724484

LP number
59074_734

siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	21.3	20.0	19.0	18.2	17.6	17.4	17.7	313.3	276.8	182.6	96.1	62.4	48.6	36.4	28.9
74,0°	19.7	18.1	17.0	16.2	15.6	15.3	15.5	298.9	258.9	160.8	84.5	62.2	47.9	34.5	26.9
75,0°	18.1	16.5	15.3	14.4	13.8	13.6	13.6	264.0	223.5	129.7	69.4	55.9	45.5	31.7	24.5
76,0°	16.3	14.7	13.7	12.7	12.1	11.7	11.8	192.6	158.3	84.1	46.3	41.8	38.2	28.2	21.4
77,0°	14.0	12.6	11.8	10.9	10.4	9.8	9.9	119.2	94.7	47.7	27.5	30.6	30.2	25.2	18.9
78,0°	12.0	10.8	10.1	9.4	8.8	8.3	8.4	60.8	51.0	28.7	23.6	31.7	31.7	27.0	18.5
79,0°	9.9	8.8	8.6	7.8	7.4	6.8	6.9	26.2	24.1	20.1	24.0	34.5	38.1	31.6	19.5
80,0°	7.8	7.1	6.8	6.2	5.7	5.4	5.4	11.7	11.9	13.1	17.9	27.0	35.6	31.7	18.8
81,0°	6.3	5.7	5.4	4.9	4.6	4.3	4.3	7.2	7.1	7.6	9.6	14.8	24.3	24.2	14.8
82,0°	4.8	4.3	4.1	3.9	3.7	3.5	3.5	5.5	5.5	5.5	6.1	7.9	14.2	14.8	9.6
83,0°	3.5	3.2	3.1	3.1	2.9	2.8	2.8	4.2	4.2	4.2	4.5	4.9	6.9	7.1	5.4
84,0°	2.6	2.5	2.3	2.3	2.3	2.2	2.2	3.1	3.2	3.2	3.3	3.4	3.6	3.5	3.2
85,0°	1.9	1.7	1.7	1.6	1.6	1.5	1.6	2.3	2.4	2.4	2.5	2.4	2.4	2.3	2.3
86,0°	1.3	1.2	1.1	1.1	1.1	1.1	1.1	1.8	1.9	1.8	1.9	1.8	1.9	1.7	1.8
87,0°	0.9	0.8	0.8	0.7	0.7	0.7	0.8	1.4	1.5	1.4	1.5	1.5	1.4	1.4	1.4
88,0°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
89,0°	0.4	0.4	0.4	0.3	0.3	0.3	0.4	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08JB EAN: 4058352724484	LP number 59074_734 siteco
-----------------------------------	--	--------------------------------------

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	24.9	24.3	24.5	25.3	25.5	25.7	25.5	25.6	25.6	25.7	25.5	25.3	24.2	24.2	24.3
74,0°	22.7	21.8	22.0	23.1	23.1	23.3	23.3	23.1	23.0	23.0	22.3	21.8	21.3	22.1	22.2
75,0°	20.1	19.3	19.5	20.0	20.1	20.7	20.5	20.1	19.5	19.2	18.5	18.6	18.7	19.6	20.1
76,0°	17.5	16.8	17.0	17.6	17.7	18.1	17.8	17.2	16.6	16.1	16.0	16.1	16.1	16.5	17.1
77,0°	15.2	14.8	14.8	15.1	14.9	15.8	14.9	14.7	13.6	13.6	13.1	13.4	12.7	13.5	13.5
78,0°	13.3	13.0	12.8	12.6	12.4	13.0	12.1	11.6	11.1	10.9	10.7	10.7	10.4	10.5	10.3
79,0°	12.2	11.5	11.0	10.5	10.6	10.6	9.8	9.6	9.0	8.8	8.6	8.6	8.3	8.5	8.1
80,0°	10.6	9.9	9.3	8.2	8.3	8.6	8.1	7.7	7.2	6.8	6.6	6.5	6.1	6.1	6.0
81,0°	8.5	8.0	7.5	6.6	6.6	6.8	6.6	6.2	5.6	5.3	5.0	4.8	4.6	4.6	4.5
82,0°	6.3	6.0	5.6	5.1	5.1	5.3	5.1	4.9	4.4	4.1	3.7	3.6	3.3	3.2	3.2
83,0°	4.4	4.3	4.0	3.8	3.7	3.8	3.8	3.5	3.1	2.9	2.7	2.6	2.4	2.4	2.2
84,0°	3.0	3.0	2.8	2.7	2.7	2.8	2.7	2.5	2.2	2.1	2.0	2.0	1.8	1.7	1.6
85,0°	2.2	2.2	2.0	2.0	1.8	1.9	1.7	1.8	1.5	1.5	1.3	1.3	1.2	1.1	0.9
86,0°	1.7	1.7	1.6	1.4	1.4	1.3	1.2	1.2	1.1	1.0	0.9	0.9	0.8	0.8	0.7
87,0°	1.4	1.3	1.3	1.2	1.2	1.1	1.1	1.0	0.9	0.9	0.8	0.7	0.7	0.7	0.6
88,0°	1.2	1.1	1.1	1.0	1.0	1.0	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.6	0.5
89,0°	1.0	1.0	1.0	0.9	0.9	0.9	0.8	0.8	0.8	0.7	0.7	0.7	0.6	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C- planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	25.2	23.7	20.7	17.3	15.7	14.3	13.6	13.2	13.9	12.2	11.9	11.5	12.0	12.5	950.9
74,0°	22.7	20.6	17.8	14.9	13.0	11.5	11.0	10.5	10.8	9.4	9.0	8.5	8.6	11.7	962.5
75,0°	19.7	17.1	15.0	13.1	11.1	9.5	9.0	8.4	8.6	7.4	7.0	6.4	6.5	10.6	973.1
76,0°	16.2	14.3	12.8	11.1	9.6	8.0	7.3	6.7	6.5	5.6	5.1	4.7	4.8	8.7	981.9
77,0°	13.4	11.9	10.7	9.0	7.7	6.2	6.0	5.0	4.6	3.7	3.4	2.9	3.1	6.4	988.3
78,0°	10.5	9.9	8.8	7.2	5.7	4.7	4.3	3.6	3.1	2.4	2.0	1.7	1.7	4.4	992.7
79,0°	8.3	7.6	6.9	5.6	4.5	3.8	3.4	2.7	2.2	1.6	1.2	1.0	1.0	2.8	995.4
80,0°	6.2	5.6	5.3	4.3	3.5	2.9	2.4	1.9	1.6	1.1	0.8	0.7	0.7	1.7	997.1
81,0°	4.5	4.1	4.0	3.2	2.6	2.2	1.9	1.5	1.2	0.9	0.7	0.5	0.5	0.9	998.0
82,0°	3.2	3.0	3.0	2.4	2.0	1.6	1.4	1.1	0.9	0.6	0.5	0.5	0.5	0.6	998.6
83,0°	2.0	2.1	2.2	1.7	1.4	1.2	1.0	0.8	0.6	0.5	0.5	0.4	0.4	0.4	999.1
84,0°	1.5	1.6	1.5	1.1	1.0	0.8	0.7	0.6	0.5	0.4	0.4	0.3	0.3	0.3	999.4
85,0°	1.0	1.0	1.0	0.7	0.7	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.2	999.6
86,0°	0.6	0.6	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.1	999.7
87,0°	0.5	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	999.8
88,0°	0.5	0.5	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	999.9
89,0°	0.5	0.5	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08JB EAN: 4058352724484	LP number 59074_734
Dimming levels table		environmental temperature: 25°C
		sit eco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	12940	88.6	91.7	90.2
95	239	252	12293	83.1	86.0	84.6
90	224	249	11640	77.7	80.4	79.1
85	210	247	11017	72.6	75.1	73.8
80	195	244	10338	67.4	69.5	68.4
75	181	242	9684	62.7	64.7	63.7
70	168	239	9064	58.4	60.3	59.4
65	154	236	8388	53.7	55.4	54.6
60	141	232	7750	49.2	50.9	50.0
55	128	229	7097	44.8	46.3	45.6
50	116	225	6483	40.6	42.0	41.3
45	103	221	5810	36.1	37.3	36.7
40	91	216	5178	32.2	33.2	32.7
35	79	211	4536	28.3	29.1	28.7
30	67	205	3884	24.3	25.0	24.6
25	55	198	3223	20.3	20.9	20.6
20	44	190	2609	16.5	17.0	16.8
15	32	178	1930	12.1	12.5	12.3
14	31	177	1873	11.8	12.1	12.0

Dimming levels table		environmental temperature: 5°C				
Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	13300	89.7	92.8	91.2
95	239	252	12622	84.2	87.1	85.6
90	225	250	11982	79.0	81.8	80.4
85	210	247	11283	73.5	76.1	74.8
80	196	245	10622	68.7	70.8	69.8
75	183	242	9992	64.3	66.3	65.3
70	169	239	9302	59.5	61.5	60.5
65	156	236	8653	55.1	56.9	56.0
60	143	233	7996	50.6	52.2	51.4
55	130	229	7327	46.1	47.6	46.8
50	117	226	6646	41.6	43.0	42.3
45	105	222	6010	37.4	38.6	38.0
40	92	217	5311	33.0	34.0	33.5
35	80	212	4657	29.0	29.9	29.4
30	68	206	3993	25.0	25.8	25.4
25	56	199	3321	20.9	21.6	21.2
20	44	190	2641	16.8	17.3	17.0
15	33	179	2010	12.8	13.2	13.0
14	31	177	1895	12.0	12.4	12.2

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08JB EAN: 4058352724484	LP number 59074_734
Dimming levels table		environmental temperature: 15°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	13140	89.1	92.2	90.6
95	239	252	12477	83.6	86.5	85.0
90	224	249	11805	78.2	80.9	79.6
85	210	247	11167	73.1	75.6	74.4
80	196	245	10519	68.2	70.3	69.2
75	182	242	9852	63.6	65.5	64.6
70	169	239	9220	59.1	61.1	60.1
65	155	236	8531	54.4	56.1	55.2
60	142	233	7883	49.9	51.5	50.7
55	129	229	7221	45.4	47.0	46.2
50	116	225	6547	40.9	42.3	41.6
45	104	221	5917	36.8	38.0	37.4
40	92	217	5278	32.7	33.8	33.2
35	79	211	4574	28.5	29.3	28.9
30	67	205	3916	24.5	25.2	24.8
25	56	199	3304	20.8	21.4	21.1
20	44	190	2629	16.7	17.2	17.0
15	32	178	1944	12.2	12.6	12.4
14	31	177	1886	11.9	12.2	12.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2B33T08JB EAN: 4058352724484	LP number 59074_734
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	12940.0	88.6
5.0	13300.0	89.7
15.0	13140.0	89.1