


Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M33T08JB EAN: 4058352682296	LP number 59158_717
	Version	post-top or side-entry mounting, Smart Interface up/down
	Optic	asymmetric, wide distribution (ST1.0a G), Back Light Control (BLC)
	Cover	toughened safety glass
	Lamps	LED 3000 K CRI ≥ 70
	Controlgear	EVG-Smart Interface
	Rated values	Net luminous flux = 11390 lm Power consumption = 88.6 W Luminous efficacy = 128.6 lm/W
		serial documentation 22.10.2024
		

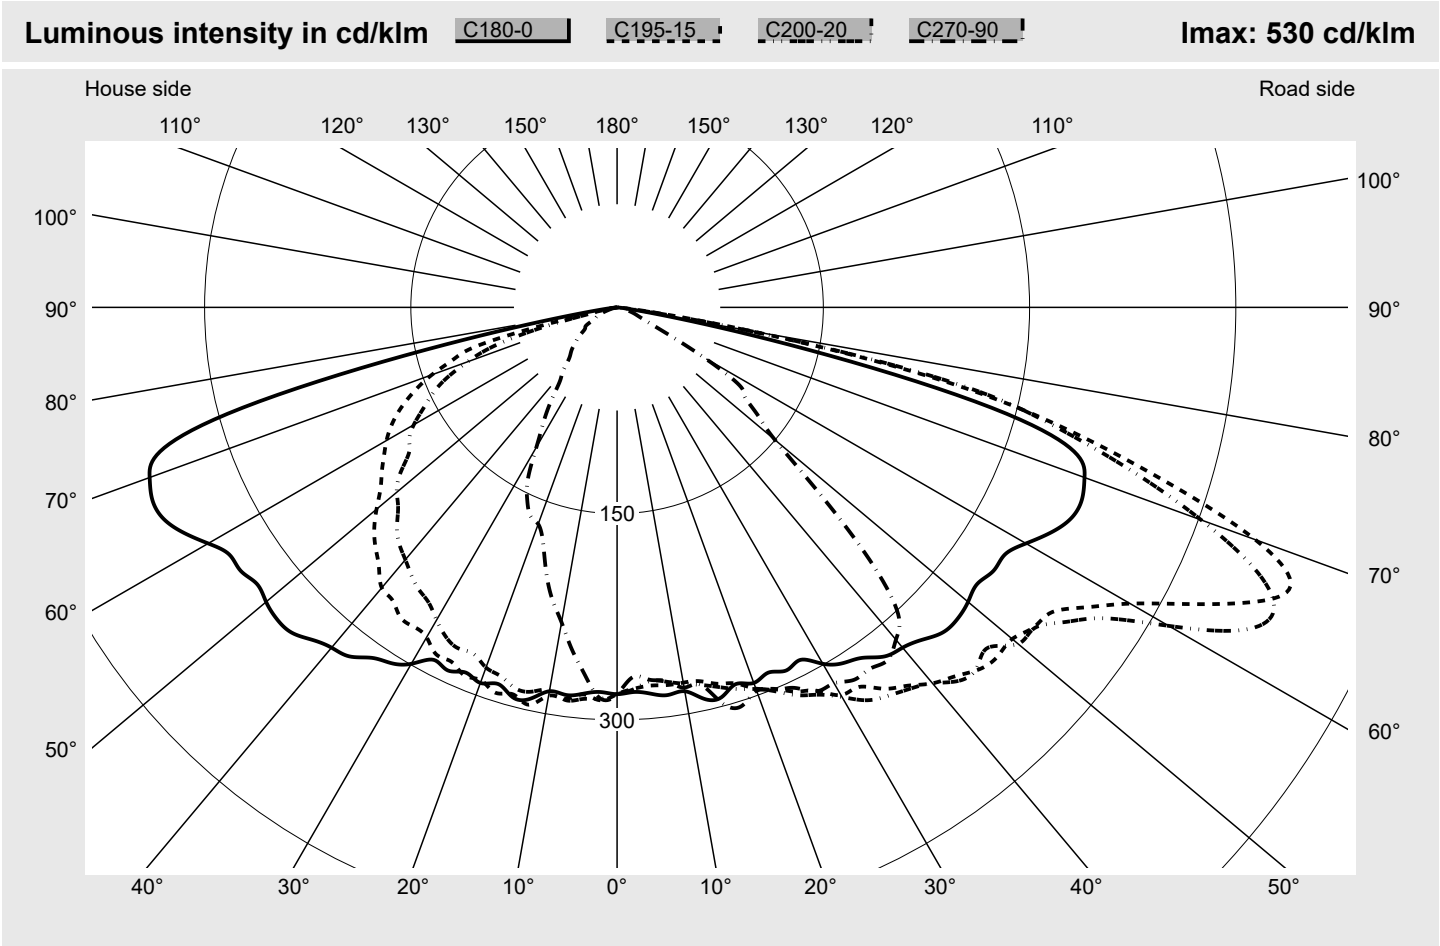

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G4
Eta 0° - 90°	100.0%	Imax 70°	494.0
Eta 90° - 180°	0.0%	Imax 80°	97.3
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family
Streetlight 21 mini LED

Order number: **5XE2M33T08JB**
EAN: **4058352682296**

LP number
59158_717

Envelope curve in cd/klm


KMK 67.5°

KMK 65°

KMK 62.5°

KMK 60°

siteco

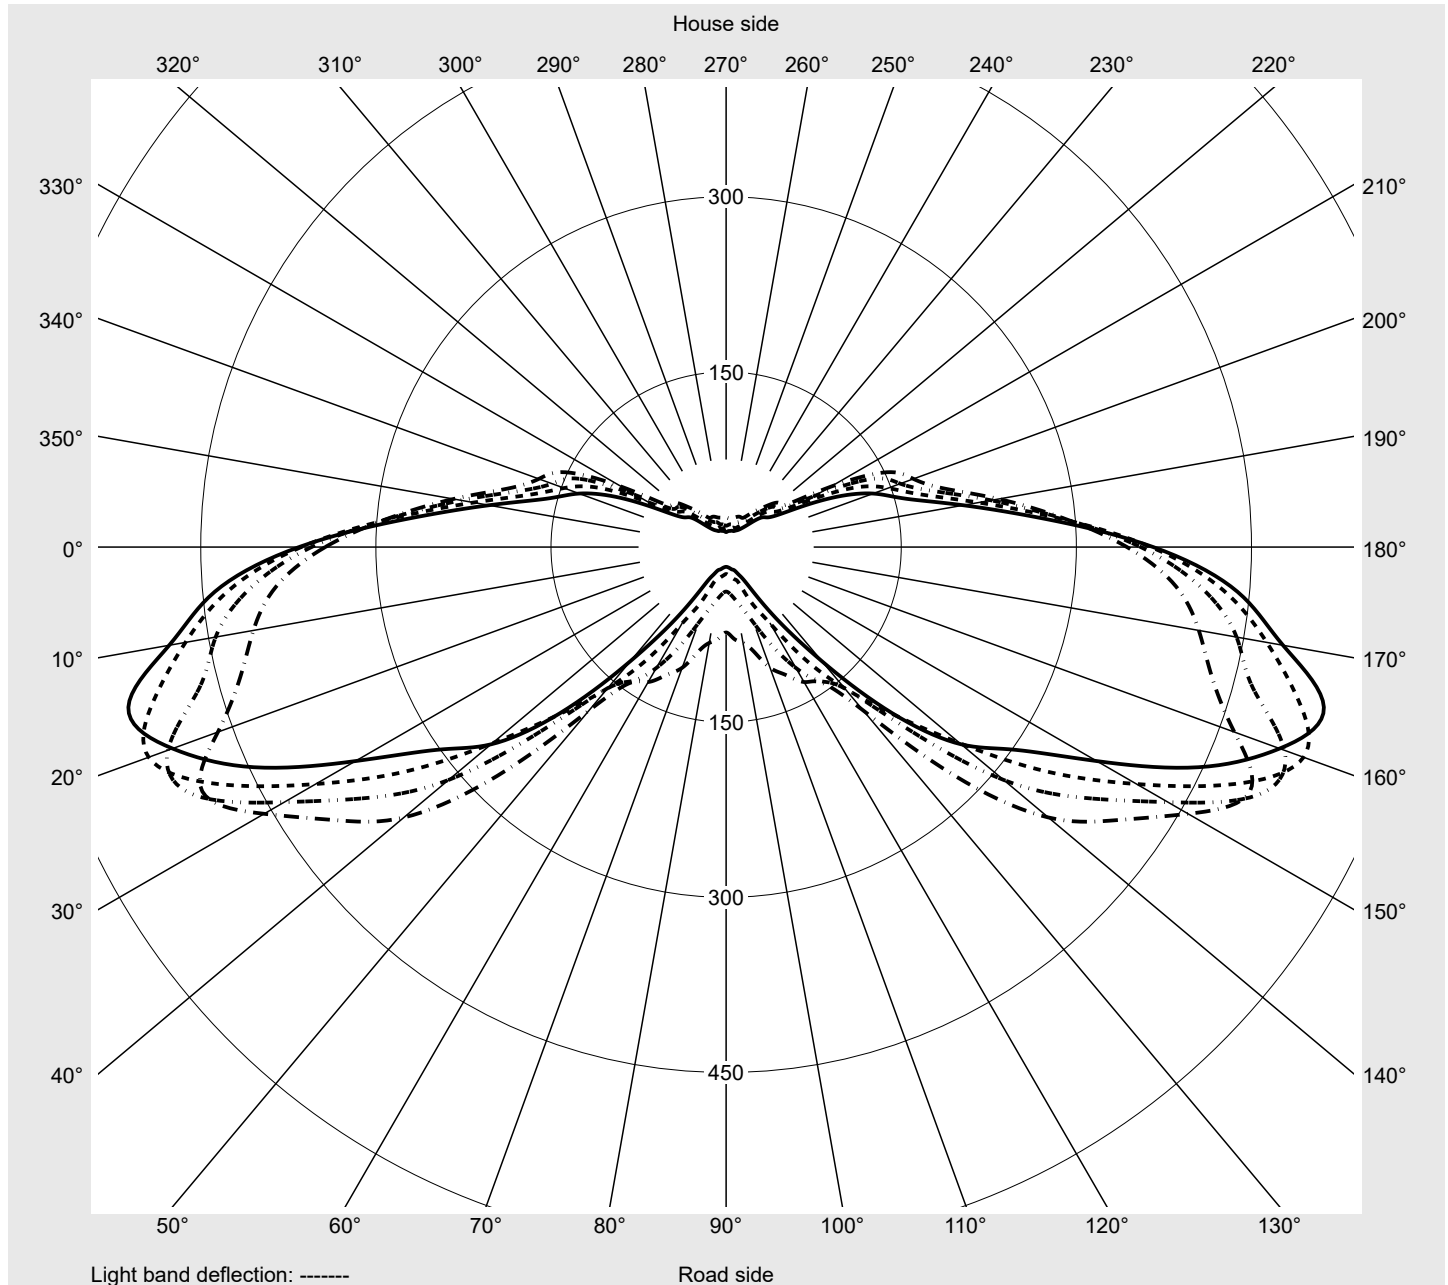

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M33T08JB EAN: 4058352682296	LP number 59158_717
-----------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3
2,5°	280.0	279.5	279.2	277.7	277.9	277.2	277.5	277.2	275.6	274.9	274.1	272.2	271.9
5,0°	282.0	279.0	278.0	276.1	272.9	271.2	268.2	269.1	269.6	270.1	269.8	269.1	270.9
7,5°	284.3	282.5	280.2	277.0	274.6	269.8	270.2	271.2	274.2	276.9	275.3	277.1	278.7
10,0°	283.5	278.8	278.9	277.1	277.9	275.3	275.0	274.3	277.9	276.8	278.3	280.6	285.6
12,5°	291.5	283.0	278.6	278.5	281.2	284.6	289.1	289.5	285.3	284.2	286.1	285.7	287.3
15,0°	293.5	287.3	282.6	283.4	285.9	287.5	291.2	291.6	289.1	290.7	289.2	288.4	292.5
17,5°	287.2	283.0	284.7	286.8	291.0	295.5	294.3	295.6	291.9	292.9	293.3	291.2	291.8
20,0°	290.7	291.7	292.2	295.1	295.4	298.3	298.7	298.0	297.8	295.7	296.5	296.5	299.4
22,5°	287.5	290.7	295.2	300.3	302.4	303.2	304.2	303.3	305.0	303.4	306.4	303.6	308.2
25,0°	291.3	293.7	300.6	308.4	311.2	310.2	305.1	310.6	315.6	314.0	311.9	310.8	313.1
27,5°	289.0	299.0	309.0	314.3	317.6	319.7	315.4	321.2	315.6	313.1	310.8	312.4	317.4
30,0°	299.3	307.0	319.6	325.6	327.2	326.9	321.7	323.1	317.8	323.1	319.9	314.6	319.2
32,5°	306.6	316.1	327.3	327.3	338.8	336.8	328.0	332.2	327.0	328.7	324.9	323.3	321.4
35,0°	311.1	323.0	331.4	338.6	344.6	341.3	340.8	340.2	334.2	335.6	333.1	338.0	343.9
37,5°	319.9	329.0	340.9	346.8	349.7	351.4	343.0	340.3	343.7	357.2	349.0	349.3	350.7
40,0°	323.1	341.3	350.9	356.9	356.9	355.3	348.8	348.2	355.8	358.7	355.6	359.4	347.1
42,5°	328.0	352.6	360.8	363.9	368.3	358.2	356.2	364.4	370.1	370.9	367.6	359.1	344.9
45,0°	334.6	357.9	364.8	372.3	370.2	361.6	366.2	373.8	385.7	385.3	368.9	360.6	349.9
47,5°	335.6	361.2	371.9	375.5	366.2	374.6	379.7	390.8	395.5	392.9	373.7	358.5	330.6
50,0°	333.2	358.6	375.4	375.2	380.7	383.0	391.4	407.7	423.6	398.5	367.7	329.8	282.7
52,5°	330.3	358.8	373.2	382.1	382.9	396.7	409.7	434.6	441.4	401.3	350.0	291.1	233.7
55,0°	334.1	363.5	378.1	386.3	398.8	423.8	441.5	441.1	420.3	385.7	309.2	234.7	184.4
57,5°	334.5	363.0	386.9	405.8	420.8	451.3	460.8	432.9	394.6	333.1	244.9	182.0	145.6
60,0°	343.4	386.8	411.2	430.9	463.3	495.1	456.9	407.8	360.3	277.0	182.7	141.5	133.5
62,5°	355.2	409.6	444.0	467.2	508.8	502.5	436.9	374.5	310.3	220.8	158.1	140.1	119.6
65,0°	363.9	427.8	470.2	507.6	526.4	480.2	405.9	335.1	261.4	202.9	157.6	116.6	75.7
67,5°	365.9	439.7	484.4	530.1	504.6	446.2	366.6	302.8	262.8	201.3	127.5	74.5	38.3
70,0°	361.8	427.3	480.7	494.0	452.1	390.2	353.2	342.1	271.3	160.9	82.6	40.8	21.3
72,5°	348.5	390.9	432.9	414.9	389.5	361.2	397.1	367.5	221.1	100.7	40.3	20.0	14.8
75,0°	281.9	295.0	323.9	333.1	324.9	367.7	367.8	233.4	109.1	39.6	15.4	12.6	11.4
77,5°	143.0	161.3	198.8	233.5	244.3	250.6	175.4	81.5	27.2	12.1	10.0	8.7	7.3
80,0°	40.2	63.0	91.1	97.3	95.2	86.7	27.8	12.7	6.5	6.7	7.5	5.6	4.2
82,5°	8.8	13.8	20.6	21.5	16.3	17.5	5.0	3.3	2.6	3.3	3.9	2.7	2.0
85,0°	1.2	1.3	1.5	1.6	1.4	1.7	1.3	1.2	1.1	0.9	1.1	0.8	0.7
87,5°	0.3	0.3	0.4	0.4	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED		Order number: 5XE2M33T08JB EAN: 4058352682296										LP number 59158_717	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3
2,5°	272.1	269.9	267.0	268.1	268.5	269.0	281.4	284.1	286.0	285.0	286.1	285.9	287.0
5,0°	269.3	272.2	271.3	271.9	270.8	271.9	283.4	282.6	282.5	285.9	285.5	283.5	281.1
7,5°	280.9	281.1	280.2	277.5	274.1	274.1	286.0	287.6	287.0	288.0	286.8	283.0	277.5
10,0°	287.1	285.1	283.0	280.7	279.3	280.8	287.8	290.8	286.8	282.7	279.5	273.9	268.3
12,5°	285.5	284.2	286.0	288.9	286.6	281.0	295.5	295.8	296.0	286.2	277.7	269.6	261.9
15,0°	292.0	290.2	289.8	292.0	297.5	298.6	293.5	294.0	291.5	286.7	277.3	264.8	251.5
17,5°	294.8	294.5	298.3	293.0	297.4	303.5	292.3	293.3	293.9	281.3	267.6	258.9	240.9
20,0°	299.0	299.5	304.2	296.9	296.7	296.7	294.8	297.3	288.7	278.8	264.7	247.9	234.6
22,5°	307.0	303.9	307.2	305.2	303.5	301.1	292.3	292.7	289.8	272.7	253.1	235.2	224.2
25,0°	308.5	307.0	306.5	307.6	304.1	305.3	288.3	287.7	284.5	273.6	248.9	229.8	214.2
27,5°	309.7	310.9	309.1	310.5	312.1	314.7	284.8	292.0	284.6	269.9	246.9	218.6	204.8
30,0°	318.8	313.0	316.5	319.3	321.1	315.6	288.4	288.0	277.1	262.6	236.5	216.2	195.1
32,5°	328.3	327.3	324.1	328.0	321.7	321.1	292.1	283.3	275.4	254.8	232.4	204.0	187.3
35,0°	333.0	330.3	327.3	330.3	321.0	320.8	293.4	280.5	274.9	250.9	222.6	198.5	180.2
37,5°	347.6	338.1	337.0	331.1	320.5	323.3	300.7	280.1	268.4	245.7	215.7	189.0	173.6
40,0°	336.7	326.6	325.9	326.6	319.5	315.5	299.6	275.7	266.2	239.6	208.1	184.4	173.4
42,5°	338.1	330.2	318.5	318.1	304.4	302.6	299.3	268.9	256.4	234.2	201.3	180.8	167.8
45,0°	331.0	306.8	290.4	268.8	256.0	259.8	300.8	268.3	248.2	226.4	193.0	177.1	163.8
47,5°	292.1	250.6	224.1	205.0	194.0	197.9	301.3	257.8	239.6	216.0	186.1	176.6	150.4
50,0°	230.3	192.7	175.9	164.2	151.9	149.7	291.8	255.7	228.4	209.2	179.8	170.6	134.0
52,5°	178.9	156.0	144.3	133.1	130.3	129.2	290.2	246.4	216.9	199.0	174.2	152.8	114.9
55,0°	145.4	130.5	117.0	116.4	114.2	113.5	290.0	243.5	208.9	184.8	172.7	133.8	95.4
57,5°	121.3	117.8	115.4	113.0	105.4	105.7	290.5	241.2	201.0	179.3	161.5	119.5	77.5
60,0°	120.8	110.0	93.0	83.4	79.0	73.2	288.7	237.1	193.6	170.7	151.6	103.2	63.9
62,5°	93.2	69.2	54.5	45.9	40.4	38.1	287.6	230.5	184.8	158.7	138.3	87.8	57.4
65,0°	54.2	33.9	28.7	26.2	24.3	23.1	285.3	219.6	173.6	147.8	120.0	76.2	53.1
67,5°	26.5	21.4	19.9	18.4	17.4	16.9	275.2	206.3	159.8	134.0	99.6	61.1	44.4
70,0°	17.3	16.2	15.1	13.9	13.6	13.6	271.2	190.7	143.4	115.8	76.3	41.8	37.8
72,5°	13.4	12.4	11.4	10.8	10.3	10.1	262.2	181.5	124.0	94.7	40.9	29.8	31.2
75,0°	9.9	9.0	7.8	7.7	7.0	7.0	234.3	162.3	97.6	56.0	20.7	21.7	24.4
77,5°	6.2	5.7	5.2	5.0	4.7	4.7	137.1	75.6	26.2	11.1	9.8	13.4	15.8
80,0°	3.7	3.3	3.1	3.0	2.9	2.6	42.3	12.7	5.3	5.7	5.5	8.1	8.7
82,5°	1.7	1.8	1.5	1.5	1.5	1.4	7.6	3.1	2.7	2.5	2.5	3.6	4.0
85,0°	0.7	0.7	0.6	0.6	0.5	0.6	1.3	1.2	1.1	1.1	1.0	1.1	1.0
87,5°	0.2	0.2	0.1	0.1	0.1	0.1	0.3	0.3	0.2	0.3	0.2	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 mini LED		Order number: 5XE2M33T08JB EAN: 4058352682296										LP number 59158_717											
Table of values for luminous intensities												Maximum luminous intensity											
sīteco																							
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone										
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm												
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	0.4	0.4										
2,5°	286.8	285.3	284.3	284.7	284.2	283.3	284.6	283.3	283.5	283.7	284.6	3.3	3.8										
5,0°	278.6	276.1	273.1	270.4	269.6	267.2	264.9	267.7	269.2	270.0	268.4	6.5	10.3										
7,5°	270.7	265.2	261.6	259.4	254.7	252.2	249.7	249.3	251.4	252.1	251.1	9.8	20.1										
10,0°	262.4	258.2	251.3	247.1	241.7	240.5	235.9	232.2	229.7	232.0	232.6	12.8	32.9										
12,5°	253.0	248.1	241.3	233.4	227.8	225.9	222.1	221.1	217.0	216.2	217.6	15.9	48.8										
15,0°	243.5	238.9	227.1	220.2	215.6	207.2	202.8	202.4	199.4	197.5	199.3	18.9	67.7										
17,5°	230.7	224.5	216.6	207.3	197.9	192.6	186.1	186.7	184.9	178.1	179.1	21.6	89.3										
20,0°	224.7	212.9	200.9	190.3	179.3	178.3	173.5	168.8	172.8	171.2	167.7	24.4	113.7										
22,5°	214.9	197.6	181.9	175.8	167.5	170.4	169.4	167.1	165.9	164.7	164.5	27.1	140.8										
25,0°	197.9	180.7	172.8	169.2	165.1	160.8	159.9	160.1	158.1	157.3	154.6	29.8	170.6										
27,5°	187.3	175.1	165.8	162.0	159.3	153.5	151.8	145.8	145.0	142.8	140.4	32.4	203.0										
30,0°	177.2	171.0	166.6	158.9	151.2	143.8	132.7	128.8	124.3	120.6	117.3	35.0	238.0										
32,5°	172.7	165.1	158.2	150.4	138.9	130.3	117.7	112.6	105.8	101.8	100.1	37.5	275.5										
35,0°	173.7	161.0	152.4	138.3	123.5	111.2	100.8	90.8	89.5	87.5	84.7	39.9	315.4										
37,5°	166.8	154.7	137.1	122.9	105.2	92.7	86.3	81.1	76.6	73.0	69.0	42.2	357.6										
40,0°	159.6	145.5	123.8	107.7	92.7	82.7	77.8	70.9	66.2	62.7	61.7	44.1	401.8										
42,5°	150.3	129.1	106.2	93.0	85.0	75.6	70.1	65.3	59.6	54.9	52.8	46.0	447.8										
45,0°	137.4	114.1	93.1	85.0	75.9	66.1	59.6	54.8	50.9	50.0	47.9	47.0	494.8										
47,5°	124.3	96.6	84.4	75.5	64.4	54.9	48.4	46.6	45.4	44.6	44.2	46.6	541.4										
50,0°	105.0	86.9	74.5	66.3	55.3	47.4	42.9	41.6	41.5	39.7	39.3	46.0	587.4										
52,5°	89.2	76.5	63.7	53.4	45.8	41.0	37.8	37.7	35.4	34.8	35.4	45.4	632.9										
55,0°	75.3	68.1	53.2	44.9	38.3	35.9	34.0	34.1	32.0	31.4	29.8	44.7	677.6										
57,5°	64.5	56.8	45.7	39.7	34.2	32.8	30.9	30.2	29.1	28.8	27.4	44.0	721.6										
60,0°	59.0	50.3	41.2	33.9	28.9	28.5	27.6	26.2	25.5	24.9	25.3	43.4	765.0										
62,5°	53.6	44.6	34.6	28.4	25.6	23.6	22.6	20.3	19.8	18.9	18.3	42.0	807.0										
65,0°	47.4	37.5	28.0	23.1	19.9	17.9	17.8	16.5	16.2	16.0	16.2	40.3	847.3										
67,5°	39.3	28.4	21.3	17.9	16.3	15.1	14.9	14.3	14.0	13.4	12.8	38.3	885.6										
70,0°	31.7	19.8	16.1	15.1	13.5	11.7	11.5	11.5	11.1	11.0	10.7	35.8	921.3										
72,5°	24.4	15.2	12.7	11.7	10.5	9.3	8.6	8.1	7.7	7.5	7.3	32.3	953.6										
75,0°	17.7	11.9	10.0	8.9	7.9	6.4	5.3	5.0	5.2	5.0	4.8	25.5	979.1										
77,5°	11.6	7.9	6.4	5.8	4.8	3.7	3.2	3.1	2.9	2.5	2.7	14.3	993.4										
80,0°	6.9	4.8	3.4	2.9	2.3	1.7	1.3	1.2	0.9	1.0	1.1	5.1	998.5										
82,5°	3.1	2.0	1.3	1.1	0.9	0.4	0.4	0.4	0.4	0.4	0.3	1.3	999.7										
85,0°	0.8	0.7	0.4	0.4	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	999.9										
87,5°	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0										
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0										

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M33T08JB EAN: 4058352682296	LP number 59158_717
Dimming levels table		environmental temperature: 25°C
		sit eco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	11390	88.6	91.7	90.2
95	239	252	10821	83.1	86.0	84.6
90	224	249	10246	77.7	80.4	79.1
85	210	247	9697	72.6	75.1	73.8
80	195	244	9100	67.4	69.5	68.4
75	181	242	8524	62.7	64.7	63.7
70	168	239	7979	58.4	60.3	59.4
65	154	236	7383	53.7	55.4	54.6
60	141	232	6821	49.2	50.9	50.0
55	128	229	6247	44.8	46.3	45.6
50	116	225	5707	40.6	42.0	41.3
45	103	221	5114	36.1	37.3	36.7
40	91	216	4558	32.2	33.2	32.7
35	79	211	3992	28.3	29.1	28.7
30	67	205	3419	24.3	25.0	24.6
25	55	198	2837	20.3	20.9	20.6
20	44	190	2297	16.5	17.0	16.8
15	32	178	1699	12.1	12.5	12.3
14	31	177	1649	11.8	12.1	12.0

Dimming levels table				environmental temperature: 5°C		
Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption	Power consumption	Power consumption
				[W] start of lifetime	[W] end of lifetime	[W] average
100	254	254	11710	89.7	92.8	91.2
95	239	252	11113	84.2	87.1	85.6
90	225	250	10550	79.0	81.8	80.4
85	210	247	9934	73.5	76.1	74.8
80	196	245	9352	68.7	70.8	69.8
75	183	242	8798	64.3	66.3	65.3
70	169	239	8190	59.5	61.5	60.5
65	156	236	7619	55.1	56.9	56.0
60	143	233	7040	50.6	52.2	51.4
55	130	229	6451	46.1	47.6	46.8
50	117	226	5851	41.6	43.0	42.3
45	105	222	5292	37.4	38.6	38.0
40	92	217	4676	33.0	34.0	33.5
35	80	212	4100	29.0	29.9	29.4
30	68	206	3516	25.0	25.8	25.4
25	56	199	2924	20.9	21.6	21.2
20	44	190	2325	16.8	17.3	17.0
15	33	179	1770	12.8	13.2	13.0
14	31	177	1668	12.0	12.4	12.2

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M33T08JB EAN: 4058352682296	LP number 59158_717
Dimming levels table		environmental temperature: 15°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	11560	89.1	92.2	90.6
95	239	252	10977	83.6	86.5	85.0
90	224	249	10386	78.2	80.9	79.6
85	210	247	9824	73.1	75.6	74.4
80	196	245	9254	68.2	70.3	69.2
75	182	242	8667	63.6	65.5	64.6
70	169	239	8111	59.1	61.1	60.1
65	155	236	7506	54.4	56.1	55.2
60	142	233	6936	49.9	51.5	50.7
55	129	229	6353	45.4	47.0	46.2
50	116	225	5760	40.9	42.3	41.6
45	104	221	5206	36.8	38.0	37.4
40	92	217	4643	32.7	33.8	33.2
35	79	211	4024	28.5	29.3	28.9
30	67	205	3445	24.5	25.2	24.8
25	56	199	2906	20.8	21.4	21.1
20	44	190	2313	16.7	17.2	17.0
15	32	178	1710	12.2	12.6	12.4
14	31	177	1660	11.9	12.2	12.0

Photometric test report

Family Streetlight 21 mini LED	Order number: 5XE2M33T08JB EAN: 4058352682296	LP number 59158_717
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	11390.0	88.6
5.0	11710.0	89.7
15.0	11560.0	89.1