

Photometric test report

Family
Streetlight 21 midi LED



Order number: 5XE3M33S08LB
EAN: 4058352683095

Version

Optic

Cover

Lamps

Controlgear

Rated values

post-top or side-entry mounting, Smart Interface up

direct, asymmetric wide distribution S10B003

toughened safety glass

LED 3000 K | CRI ≥ 70


EVG-Smart Interface

Net luminous flux = 12620 lm
Power consumption = 99.6 W
Luminous efficacy = 126.7 lm/W

LP number
59152_2473

serial
documentation
22.10.2024

siteco

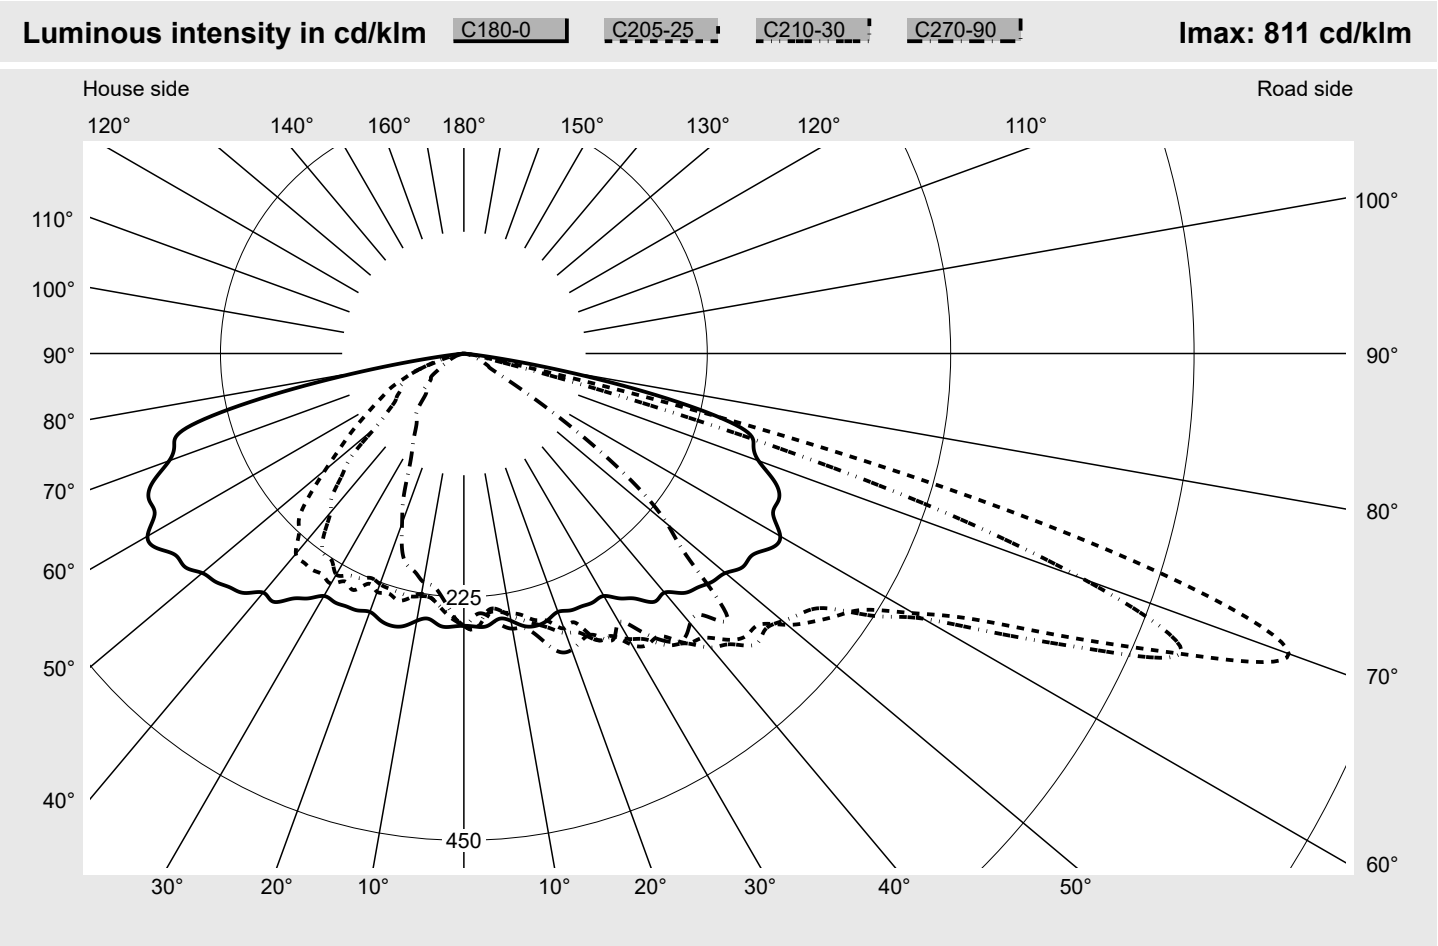

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	811.4
Eta 90° - 180°	0.0%	Imax 80°	97.1
Measurement conditions		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
DIN EN 13032 and DIN 5032			

Photometric test report

Family
Streetlight 21 midi LED

Order number: **5XE3M33S08LB**
EAN: **4058352683095**

LP number
59152_2473

Envelope curve in cd/klm


KMK 70°

KMK 67.5°

KMK 65°

KMK 62.5°

siteco

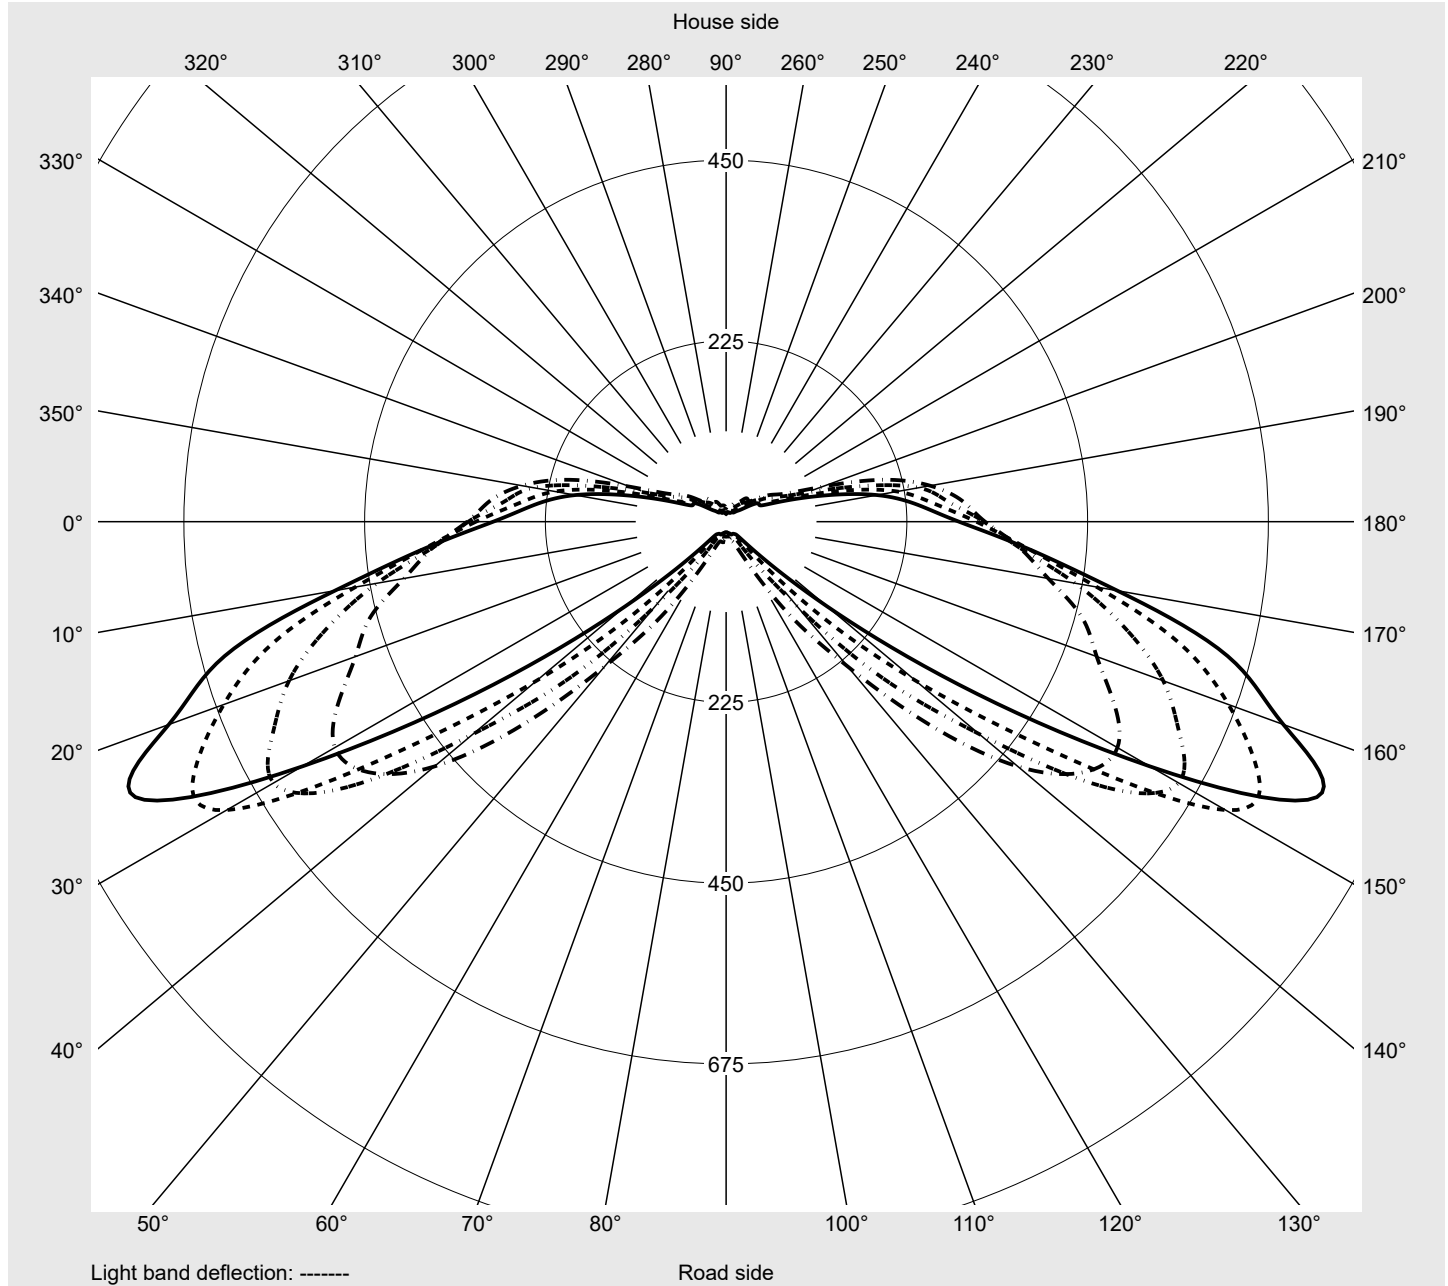

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M33S08LB EAN: 4058352683095	LP number 59152_2473
-----------------------------------	--	-------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7
2,5°	252.7	252.6	255.1	255.9	254.5	255.0	254.0	252.2	251.7	247.4	245.6	244.7	243.6
5,0°	252.7	247.6	244.8	246.2	244.1	242.4	239.8	236.2	239.7	236.4	232.5	233.6	234.3
7,5°	247.5	246.2	247.0	241.4	241.5	240.8	238.5	238.2	237.0	239.8	242.0	244.4	244.4
10,0°	250.9	251.6	254.7	244.8	240.1	243.6	246.0	248.9	247.1	245.5	243.2	248.5	256.4
12,5°	258.1	251.0	248.5	247.9	244.5	247.6	252.4	251.2	250.3	256.2	259.5	260.6	263.5
15,0°	260.4	253.2	248.3	249.4	250.9	255.1	259.0	261.5	258.8	265.7	270.2	267.9	269.6
17,5°	258.3	257.3	247.8	248.7	251.9	259.5	266.5	266.0	275.2	277.4	277.3	277.8	286.1
20,0°	254.1	250.5	251.9	255.9	262.1	270.4	275.0	276.8	276.7	279.1	278.4	285.9	281.5
22,5°	257.0	252.2	255.3	268.1	272.7	269.3	279.3	285.9	287.4	287.8	284.5	282.2	286.1
25,0°	257.8	257.2	270.3	273.8	283.2	292.2	292.5	297.3	302.1	298.9	293.3	289.8	292.8
27,5°	259.1	258.9	269.3	275.9	290.3	294.3	295.3	301.0	295.9	293.4	289.9	296.4	293.1
30,0°	258.8	273.0	282.5	292.7	295.7	311.0	304.7	312.4	300.4	305.3	301.8	299.0	302.9
32,5°	268.4	281.3	284.7	297.6	311.2	318.2	313.4	319.9	315.8	313.8	308.7	313.3	302.9
35,0°	276.6	287.2	295.6	296.7	309.7	318.9	329.3	329.7	312.6	320.8	315.6	320.8	316.5
37,5°	289.2	297.8	300.2	316.3	319.7	337.4	337.7	332.8	327.5	323.7	318.9	318.2	332.2
40,0°	288.5	305.0	310.1	313.4	327.9	343.2	354.8	344.9	337.5	333.4	324.7	347.2	341.1
42,5°	300.3	309.6	317.1	332.9	343.7	358.8	364.5	353.0	347.4	337.7	344.4	349.5	356.9
45,0°	305.8	317.1	325.5	333.0	349.1	369.1	380.6	362.0	354.6	368.9	366.8	388.4	383.2
47,5°	312.0	313.3	325.1	341.9	368.3	370.8	377.7	368.2	368.3	388.5	397.5	390.1	382.7
50,0°	315.7	324.5	327.1	342.0	370.4	390.2	384.7	382.7	398.7	421.6	412.3	380.7	354.1
52,5°	324.5	324.8	337.8	340.4	373.5	407.0	394.1	398.2	435.2	435.4	412.2	358.0	310.7
55,0°	325.2	339.0	343.2	354.4	370.6	422.3	410.7	440.5	443.3	424.3	372.3	320.6	285.2
57,5°	335.5	346.3	354.6	362.1	389.2	440.8	451.8	462.3	460.2	409.5	351.4	299.4	233.2
60,0°	337.7	358.8	382.6	394.8	422.9	480.1	490.2	493.0	465.8	401.4	305.0	234.6	170.2
62,5°	322.3	366.3	407.2	458.3	491.0	532.4	562.5	543.7	474.1	356.4	235.0	151.7	80.7
65,0°	320.9	365.9	441.4	515.0	579.1	622.5	650.4	576.3	411.2	274.5	136.3	61.5	26.5
67,5°	311.5	375.7	468.6	584.1	665.5	729.3	718.0	501.2	307.7	161.4	52.8	22.8	20.7
70,0°	289.9	375.0	494.5	646.3	738.3	811.4	609.3	353.6	163.9	60.9	24.9	18.9	17.3
72,5°	280.7	388.9	529.3	634.1	740.9	675.2	389.9	143.3	60.4	27.9	16.8	16.0	15.2
75,0°	265.2	365.2	466.4	531.9	584.7	383.0	130.8	41.7	27.5	17.8	14.0	12.8	11.6
77,5°	192.5	248.8	264.2	279.3	239.7	78.3	24.8	16.9	12.2	9.5	10.3	8.9	7.8
80,0°	95.5	89.9	86.1	97.1	65.8	14.7	10.3	5.9	5.3	5.7	6.8	5.1	5.0
82,5°	25.0	19.4	13.4	7.5	11.9	4.8	3.8	3.1	3.0	2.4	2.7	2.7	2.2
85,0°	1.0	1.6	1.6	1.3	1.4	1.6	1.4	1.2	1.4	0.9	1.2	0.9	1.0
87,5°	0.4	0.4	0.4	0.5	0.5	0.5	0.3	0.6	0.5	0.4	0.4	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED				Order number: 5XE3M33S08LB EAN: 4058352683095								LP number 59152_2473			
Table of values for luminous intensities										Maximum luminous intensity				siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°		
γ	Luminous intensity in cd/klm														
0,0°	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7		
2,5°	243.6	243.2	243.3	241.2	240.5	242.2	250.2	248.9	247.1	245.4	245.5	243.3	240.0		
5,0°	234.1	234.7	239.6	243.4	242.3	242.8	249.9	251.9	245.5	241.3	236.8	236.2	233.4		
7,5°	243.7	243.8	244.1	247.6	248.9	252.1	248.0	241.8	234.4	231.7	228.2	228.4	225.5		
10,0°	257.2	254.6	250.4	251.4	252.5	258.3	242.9	242.6	235.3	228.9	225.6	227.8	225.5		
12,5°	261.6	262.7	263.6	260.7	258.4	260.1	257.9	249.1	241.8	233.6	231.4	229.9	224.5		
15,0°	273.9	274.4	275.1	277.9	277.1	272.5	263.7	252.8	241.7	241.0	236.1	228.8	219.4		
17,5°	276.7	270.5	275.6	275.9	279.5	288.6	260.3	251.3	244.9	237.3	232.4	228.0	216.6		
20,0°	285.2	286.3	287.4	283.7	284.5	291.4	254.3	265.1	245.3	240.9	234.4	226.8	227.8		
22,5°	290.7	287.8	282.6	280.9	284.6	286.4	258.8	258.1	247.1	240.8	230.3	224.6	223.8		
25,0°	290.9	287.2	284.9	293.2	285.2	287.3	253.7	262.3	252.9	244.0	241.3	229.1	223.8		
27,5°	289.3	299.7	289.5	293.7	287.8	298.4	247.8	259.9	263.0	254.6	237.6	231.2	222.7		
30,0°	304.3	292.9	297.5	300.8	300.7	286.7	261.7	260.3	261.4	242.3	245.5	235.9	219.5		
32,5°	305.9	308.9	297.2	312.5	307.7	304.5	270.7	266.6	261.3	257.8	242.7	227.1	210.7		
35,0°	312.3	315.7	323.4	321.9	326.7	324.5	274.1	271.0	269.6	262.0	244.2	226.0	186.2		
37,5°	342.6	338.0	331.5	344.3	331.4	333.1	273.8	276.4	276.8	258.8	243.4	213.1	165.6		
40,0°	350.0	346.7	344.9	344.4	337.9	325.4	288.1	279.6	275.1	264.7	241.7	191.8	147.8		
42,5°	364.9	348.0	345.2	345.9	342.0	328.4	291.2	281.7	286.2	261.6	225.5	181.1	134.3		
45,0°	364.0	353.2	344.2	344.8	339.4	344.7	297.8	279.5	275.9	253.2	215.4	159.3	121.5		
47,5°	357.3	337.5	304.9	296.2	280.5	284.0	305.0	284.6	285.2	249.7	192.9	141.3	109.9		
50,0°	314.0	275.9	263.2	255.3	247.2	245.9	311.3	293.6	273.0	229.3	166.9	107.3	88.1		
52,5°	278.1	253.7	229.4	220.1	205.6	201.2	315.6	297.5	264.7	208.9	144.9	89.3	79.1		
55,0°	239.5	201.5	165.8	154.9	144.9	137.0	312.2	294.2	259.8	194.6	127.1	78.0	74.1		
57,5°	183.6	138.9	110.6	88.6	79.1	74.1	313.5	287.5	236.2	170.2	109.8	73.2	66.2		
60,0°	111.5	71.4	46.5	37.5	35.2	32.8	311.2	271.5	216.0	147.6	95.5	67.8	62.2		
62,5°	42.8	28.4	25.5	26.0	25.5	25.7	295.3	257.9	201.5	127.0	83.6	67.2	53.8		
65,0°	23.4	23.1	22.8	23.5	21.6	21.4	278.4	243.5	170.0	104.7	73.6	60.2	48.1		
67,5°	20.9	19.5	18.9	18.8	18.6	18.7	259.7	216.3	148.1	85.9	59.1	57.9	41.2		
70,0°	17.3	16.9	14.9	14.9	13.3	13.2	239.7	190.8	125.8	74.2	47.9	45.9	33.0		
72,5°	14.5	13.7	11.8	11.8	9.4	10.7	215.6	168.6	110.3	54.9	29.2	33.4	25.5		
75,0°	10.2	9.6	8.6	7.6	7.1	8.2	187.2	114.4	77.4	24.7	20.0	22.7	19.4		
77,5°	6.8	6.5	5.6	5.4	5.0	4.8	100.2	23.1	17.9	7.8	11.3	11.5	11.8		
80,0°	3.9	4.2	3.1	3.3	3.8	3.3	40.0	7.2	6.0	5.2	7.0	6.8	6.4		
82,5°	2.1	2.1	1.7	2.3	1.9	1.6	10.0	3.5	3.0	2.4	3.3	3.1	2.9		
85,0°	0.8	1.0	0.6	0.7	0.6	0.6	1.5	1.2	1.1	1.1	1.1	1.3	1.1		
87,5°	0.4	0.2	0.2	0.2	0.2	0.4	0.3	0.3	0.2	0.4	0.3	0.2	0.1		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		

Photometric test report

Family				Order number: 5XE3M33S08LB								LP number			
Streetlight 21 midi LED				EAN: 4058352683095								59152_2473			
Table of values for luminous intensities												Maximum luminous intensity		sīteco	
C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone		
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm			
0,0°	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	251.7	0.4	0.4		
2,5°	240.3	241.6	238.8	237.8	237.5	239.7	242.6	244.7	244.9	242.1	241.0	2.9	3.3		
5,0°	228.5	228.0	227.0	225.7	228.3	227.7	229.0	226.6	226.4	225.7	226.7	5.7	9.0		
7,5°	228.3	226.6	219.5	221.8	216.9	216.1	216.6	215.9	217.8	218.5	216.7	8.4	17.4		
10,0°	218.6	215.1	214.8	214.4	213.9	212.4	209.8	207.9	207.4	213.1	214.6	11.2	28.6		
12,5°	222.9	224.9	218.4	214.2	208.1	211.3	215.6	212.9	208.3	206.4	207.2	14.2	42.8		
15,0°	213.8	216.2	213.4	214.0	210.7	206.1	202.7	200.1	201.7	201.8	202.6	17.2	60.1		
17,5°	213.2	212.5	216.4	210.3	205.3	203.3	199.8	189.2	192.6	193.9	189.9	20.1	80.2		
20,0°	221.3	208.9	205.5	200.6	189.2	182.7	179.3	173.8	164.6	163.6	167.0	22.8	102.9		
22,5°	220.7	214.8	198.3	184.9	172.2	159.3	158.7	146.8	146.8	144.1	146.6	25.2	128.1		
25,0°	217.0	197.4	182.7	161.6	153.9	143.9	140.8	132.9	136.9	126.6	121.7	27.8	155.9		
27,5°	207.1	180.6	159.0	145.7	138.5	128.8	124.3	119.3	110.8	107.1	104.5	29.9	185.9		
30,0°	187.4	164.9	146.0	133.8	122.6	115.2	100.8	101.8	98.2	93.7	93.5	32.4	218.3		
32,5°	173.5	148.1	134.8	114.4	104.9	102.5	95.5	91.7	86.3	82.3	83.0	35.0	253.3		
35,0°	154.6	136.4	115.1	101.4	100.1	95.8	89.4	82.3	80.9	75.6	76.0	37.5	290.8		
37,5°	136.6	117.1	104.1	96.7	95.3	87.5	84.6	81.1	77.0	76.2	72.8	40.4	331.2		
40,0°	121.4	107.1	99.6	91.1	89.3	82.0	77.5	73.8	68.3	66.8	65.6	42.9	374.0		
42,5°	113.6	96.2	91.9	86.0	85.0	79.7	71.7	68.0	59.4	56.2	53.6	45.4	419.4		
45,0°	100.6	90.9	85.7	81.0	74.3	66.6	57.9	54.8	51.6	51.5	49.7	47.7	467.1		
47,5°	93.6	83.1	73.5	70.4	63.4	53.5	51.8	47.0	51.1	49.2	51.2	48.6	515.7		
50,0°	84.1	73.4	60.5	61.0	52.7	47.5	47.1	44.9	45.0	43.7	42.9	48.6	564.3		
52,5°	75.3	64.9	55.6	50.1	46.6	40.8	42.4	40.3	40.5	36.3	38.4	48.6	613.0		
55,0°	64.4	54.4	47.2	42.8	42.1	38.4	38.0	35.6	33.6	34.1	36.2	47.5	660.5		
57,5°	53.1	46.8	44.4	39.8	37.9	35.5	33.5	33.2	32.2	31.5	28.2	46.2	706.7		
60,0°	44.6	40.4	41.3	35.5	32.0	30.9	30.1	30.0	29.4	28.7	24.4	44.7	751.4		
62,5°	40.0	38.3	37.9	30.7	28.1	26.9	22.0	20.8	20.6	19.4	17.2	44.1	795.5		
65,0°	37.9	33.8	30.2	24.9	21.3	19.0	18.2	16.5	16.8	16.2	14.2	43.7	839.1		
67,5°	30.5	27.2	21.8	17.6	15.1	15.1	14.7	14.6	14.7	13.4	12.3	42.8	881.9		
70,0°	22.9	18.7	15.1	14.0	13.3	12.0	11.9	12.1	11.4	11.7	9.5	40.0	921.9		
72,5°	18.9	15.1	13.3	11.8	10.6	9.5	8.2	7.9	7.5	7.0	7.5	34.4	956.3		
75,0°	14.0	11.5	8.9	9.5	7.5	5.9	4.0	4.3	4.2	3.7	3.9	25.3	981.7		
77,5°	10.3	7.2	5.6	5.4	3.9	2.9	2.4	2.5	1.9	2.4	2.1	12.3	994.0		
80,0°	6.0	3.9	3.0	2.5	1.9	1.4	1.2	0.9	1.0	0.9	1.0	4.6	998.6		
82,5°	2.5	1.9	0.8	0.6	0.7	0.4	0.3	0.2	0.3	0.4	0.4	1.1	999.7		
85,0°	0.9	0.4	0.4	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.2	999.9		
87,5°	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M33S08LB EAN: 4058352683095	LP number 59152_2473
Dimming levels table		environmental temperature: 25°C
		sit eco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	12620	99.6	102.2	100.9
95	239	252	11996	93.6	96.1	94.8
90	224	249	11360	87.6	89.9	88.8
85	209	247	10705	81.4	83.6	82.5
80	195	244	10079	75.8	77.8	76.8
75	181	242	9445	70.2	72.0	71.1
70	168	239	8845	65.1	66.8	65.9
65	154	236	8187	59.6	61.2	60.4
60	141	232	7563	54.8	56.2	55.5
55	128	229	6928	50.0	51.2	50.6
50	116	225	6333	45.5	46.6	46.0
45	103	221	5676	40.6	41.6	41.1
40	91	216	5059	36.0	36.8	36.4
35	79	211	4433	31.3	32.1	31.7
30	67	205	3796	26.9	27.5	27.2
25	55	198	3150	22.4	23.0	22.7
20	44	190	2548	18.3	18.7	18.5
15	32	178	1884	13.6	13.9	13.8
14	29	175	1716	12.3	12.6	12.4

Dimming levels table		environmental temperature: 5°C
----------------------	--	--------------------------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	12950	100.9	103.5	102.2
95	239	252	12295	94.8	97.3	96.0
90	225	250	11675	89.2	91.5	90.4
85	210	247	10994	82.9	85.2	84.1
80	196	245	10346	77.3	79.2	78.2
75	182	242	9690	71.6	73.5	72.6
70	169	239	9069	66.4	68.2	67.3
65	156	236	8439	61.3	62.9	62.1
60	142	233	7750	55.9	57.3	56.6
55	129	229	7098	51.1	52.3	51.7
50	117	226	6488	46.5	47.6	47.0
45	104	221	5816	41.6	42.6	42.1
40	92	217	5187	36.9	37.8	37.3
35	80	212	4549	32.2	33.0	32.6
30	68	206	3902	27.6	28.3	28.0
25	56	199	3246	23.2	23.7	23.4
20	44	190	2579	18.6	19.0	18.8
15	33	179	1962	14.2	14.6	14.4
13	29	175	1736	12.5	12.8	12.6

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M33S08LB EAN: 4058352683095	LP number 59152_2473
Dimming levels table		environmental temperature: 15°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	12800	100.2	102.8	101.5
95	239	252	12160	94.2	96.7	95.4
90	224	249	11508	88.2	90.4	89.3
85	210	247	10884	82.3	84.6	83.4
80	196	245	10246	76.7	78.7	77.7
75	182	242	9601	71.1	73.0	72.0
70	168	239	8943	65.6	67.3	66.4
65	155	236	8321	60.4	62.1	61.2
60	142	233	7689	55.5	56.9	56.2
55	129	229	7045	50.7	51.9	51.3
50	116	225	6391	45.9	47.0	46.4
45	104	221	5777	41.3	42.3	41.8
40	91	216	5102	36.3	37.1	36.7
35	79	211	4468	31.6	32.4	32.0
30	67	205	3825	27.1	27.7	27.4
25	55	198	3173	22.6	23.2	22.9
20	44	190	2566	18.5	18.9	18.7
15	32	178	1896	13.7	14.0	13.8
13	29	175	1727	12.4	12.7	12.6

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M33S08LB EAN: 4058352683095	LP number 59152_2473
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	12620.0	99.6
5.0	12950.0	100.9
15.0	12800.0	100.2