

Photometric test report

Family
Monsun® 11

Order number: **51FP10MP680L**
EAN: **4069025273994**

LP number
58939_172



Version prismatic diffuser, opal, PMMA, wide distribution
Lamps LED 6500 K | CRI ≥ 80
Controlgear ECG Multilumen
Rated values Net luminous flux = 7970 lm
Power consumption = 45.1 W
Luminous efficacy = 176.7 lm/W

serial
documentation
23.10.2024


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 340 cd/klm

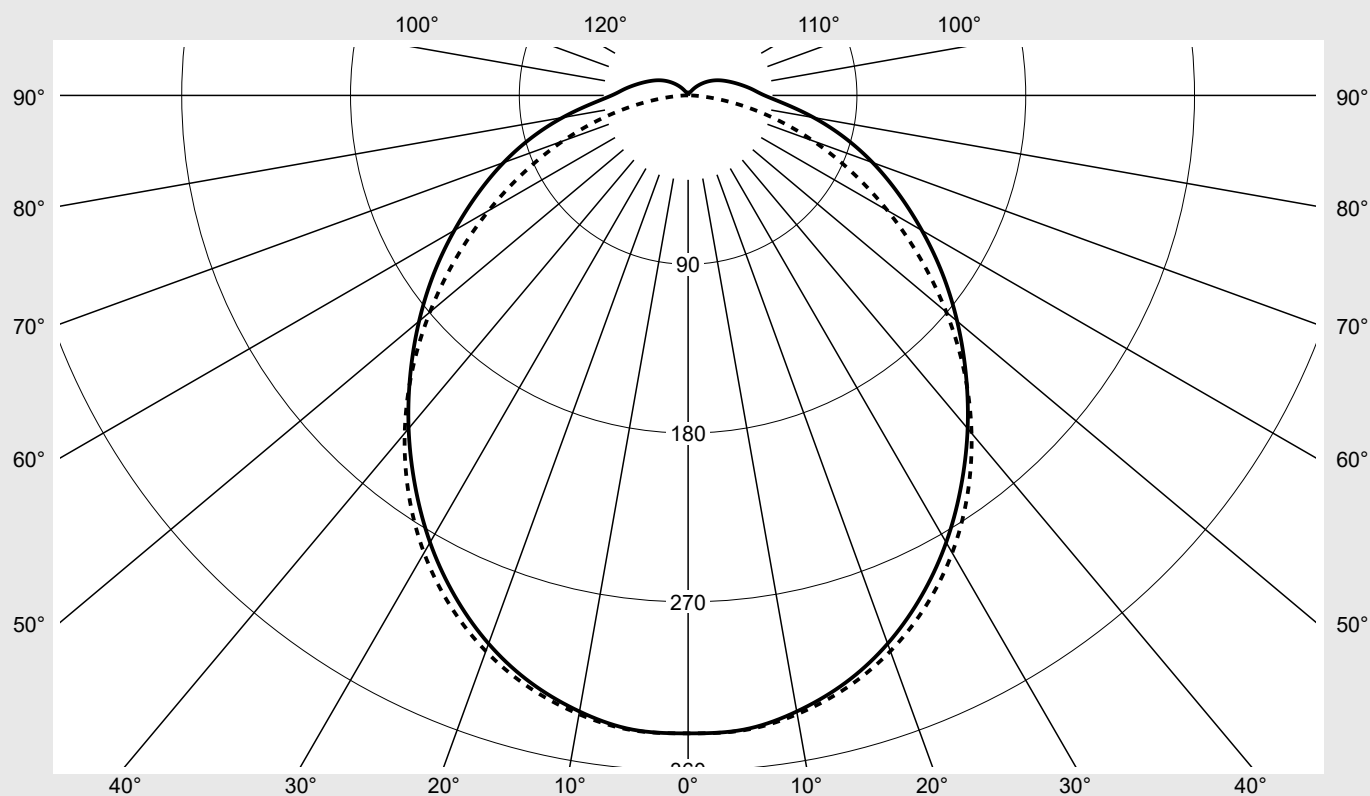

Classifications

DIN 5040 A 4 1
CIE N1=47 N2=77 N3=93
N4=94 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 94.2%
 ϕ_o 5.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 11	Order number: 51FP10MP680L EAN: 4069025273994	LP number 58939_172
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	340.1	340.1	340.1	340.1	340.1	340.1	340.1	2.0	2.0
5°	339.4	338.3	336.5	337.9	339.5	339.4	339.8	16.2	18.2
10°	333.5	333.0	331.2	332.8	334.6	334.7	335.0	31.7	49.9
15°	324.2	324.2	322.5	324.2	326.1	326.4	326.9	46.1	96.0
20°	311.0	311.6	310.1	311.9	314.1	314.7	315.3	58.6	154.6
25°	294.4	295.4	294.1	296.0	298.4	299.4	300.2	68.7	223.4
30°	275.2	276.6	275.1	276.8	279.4	280.7	281.6	76.1	299.5
35°	253.9	255.2	253.8	254.9	257.1	258.4	259.7	80.5	380.0
40°	231.8	232.9	231.3	231.1	232.5	233.8	235.1	81.9	461.9
45°	209.4	209.9	207.8	205.9	206.1	206.6	208.2	80.4	542.4
50°	187.2	187.1	184.8	181.3	179.3	178.3	179.7	76.6	619.0
55°	165.5	164.8	162.1	157.0	153.1	150.2	150.9	70.7	689.7
60°	143.9	142.9	139.5	133.7	127.9	123.2	122.7	63.3	753.0
65°	123.6	122.5	117.8	111.0	104.2	97.9	96.0	54.9	808.0
70°	104.7	103.3	97.1	89.4	81.7	74.3	71.0	45.8	853.8
75°	86.1	84.4	77.8	69.2	60.2	52.2	47.8	36.3	890.0
80°	68.0	66.1	60.2	50.5	40.7	32.1	26.9	26.7	916.7
85°	51.8	50.0	44.6	35.3	24.7	15.7	10.1	18.3	935.0
90°	40.8	39.2	34.4	26.0	15.9	6.9	1.8	13.1	948.2
95°	34.8	33.5	29.7	22.7	13.6	5.1	1.6	11.2	959.3
100°	29.9	28.8	25.4	19.2	11.3	3.7	1.4	9.4	968.7
105°	25.7	24.7	21.4	16.1	8.8	2.4	1.2	7.7	976.4
110°	22.1	20.9	18.0	13.0	6.6	1.4	1.1	6.1	982.5
115°	19.0	17.8	15.0	10.4	4.7	1.2	1.1	4.9	987.4
120°	16.0	14.8	12.2	7.9	3.1	1.2	1.0	3.8	991.2
125°	13.0	11.9	9.4	5.6	1.7	1.1	0.9	2.7	993.9
130°	10.1	9.1	6.9	3.7	1.4	1.1	1.0	1.9	995.9
135°	7.3	6.5	4.6	2.1	1.4	1.1	1.1	1.3	997.1
140°	4.8	4.1	2.7	1.7	1.4	1.1	1.1	0.8	998.0
145°	2.6	2.3	1.9	1.7	1.4	1.2	1.2	0.5	998.5
150°	2.0	2.0	1.9	1.6	1.3	1.3	1.3	0.4	998.9
155°	1.9	1.9	1.7	1.6	1.4	1.4	1.4	0.4	999.3
160°	1.7	1.7	1.6	1.4	1.4	1.4	1.4	0.3	999.6
165°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.8
170°	1.3	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.9
175°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Monsun® 11	Order number: 51FP10MP680L EAN: 4069025273994	LP number 58939_172
UGR-Table	Standard room	siteco

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	21.0	22.7	21.4	23.0	23.4	21.0	22.7	21.4	23.0	23.4
	3H	22.8	24.3	23.1	24.6	25.0	22.4	23.9	22.8	24.3	24.6
	4H	23.6	25.0	24.0	25.4	25.8	22.9	24.4	23.3	24.7	25.1
	6H	24.3	25.7	24.8	26.1	26.4	23.3	24.6	23.7	25.0	25.4
	8H	24.7	26.0	25.1	26.3	26.7	23.4	24.7	23.8	25.1	25.5
	12H	25.0	26.2	25.5	26.6	27.0	23.5	24.7	23.9	25.1	25.5
4H	2H	21.7	23.2	22.1	23.5	23.9	21.7	23.2	22.1	23.5	23.9
	3H	23.7	24.9	24.1	25.3	25.7	23.3	24.5	23.7	24.9	25.3
	4H	24.6	25.8	25.1	26.2	26.6	23.9	25.1	24.4	25.5	25.9
	6H	25.5	26.5	26.0	27.0	27.4	24.4	25.4	24.9	25.8	26.3
	8H	26.0	26.9	26.4	27.3	27.8	24.6	25.5	25.0	25.9	26.4
	12H	26.4	27.2	26.9	27.6	28.1	24.7	25.5	25.1	25.9	26.4
8H	4H	24.9	25.9	25.4	26.3	26.8	24.3	25.3	24.8	25.7	26.2
	6H	26.0	26.8	26.5	27.3	27.8	25.0	25.7	25.4	26.2	26.7
	8H	26.6	27.3	27.1	27.7	28.3	25.2	25.9	25.7	26.3	26.9
	12H	27.1	27.7	27.6	28.2	28.7	25.3	25.9	25.8	26.4	27.0
12H	4H	25.0	25.8	25.5	26.3	26.8	24.4	25.3	24.9	25.7	26.2
	6H	26.1	26.8	26.6	27.3	27.8	25.1	25.8	25.6	26.3	26.8
	8H	26.7	27.3	27.2	27.8	28.3	25.4	26.0	25.9	26.5	27.0

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:	L = 1590 B = 87	H(C0) = 21 H(C90) = 21	H(C180) = 21 H(C270) = 21
C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	13742.6	13827.8	13928.9	14220.1	14833.9	15655.5	16741.5
50°	13033.9	13082.2	13180.0	13381.1	13887.1	14667.3	15857.3
55°	12359.3	12373.7	12449.5	12547.6	12938.7	13620.5	14874.5
60°	11692.6	11682.8	11703.1	11740.2	11998.0	12561.1	13826.0
65°	11106.4	11079.7	10986.0	10916.3	11069.5	11493.2	12727.8
70°	10603.1	10543.2	10269.6	10075.7	10093.6	10368.7	11548.0
75°	10078.4	9983.2	9600.2	9210.8	8982.4	9075.0	10145.4
80°	9522.2	9364.2	8980.4	8288.1	7710.9	7454.3	8296.6
85°	9116.4	8923.4	8506.2	7638.2	6492.6	5563.2	5794.1

Photometric test report

Family
Monsun® 11

Order number: 51FP10MP680L
EAN: 4069025273994

LP number
58939_172

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

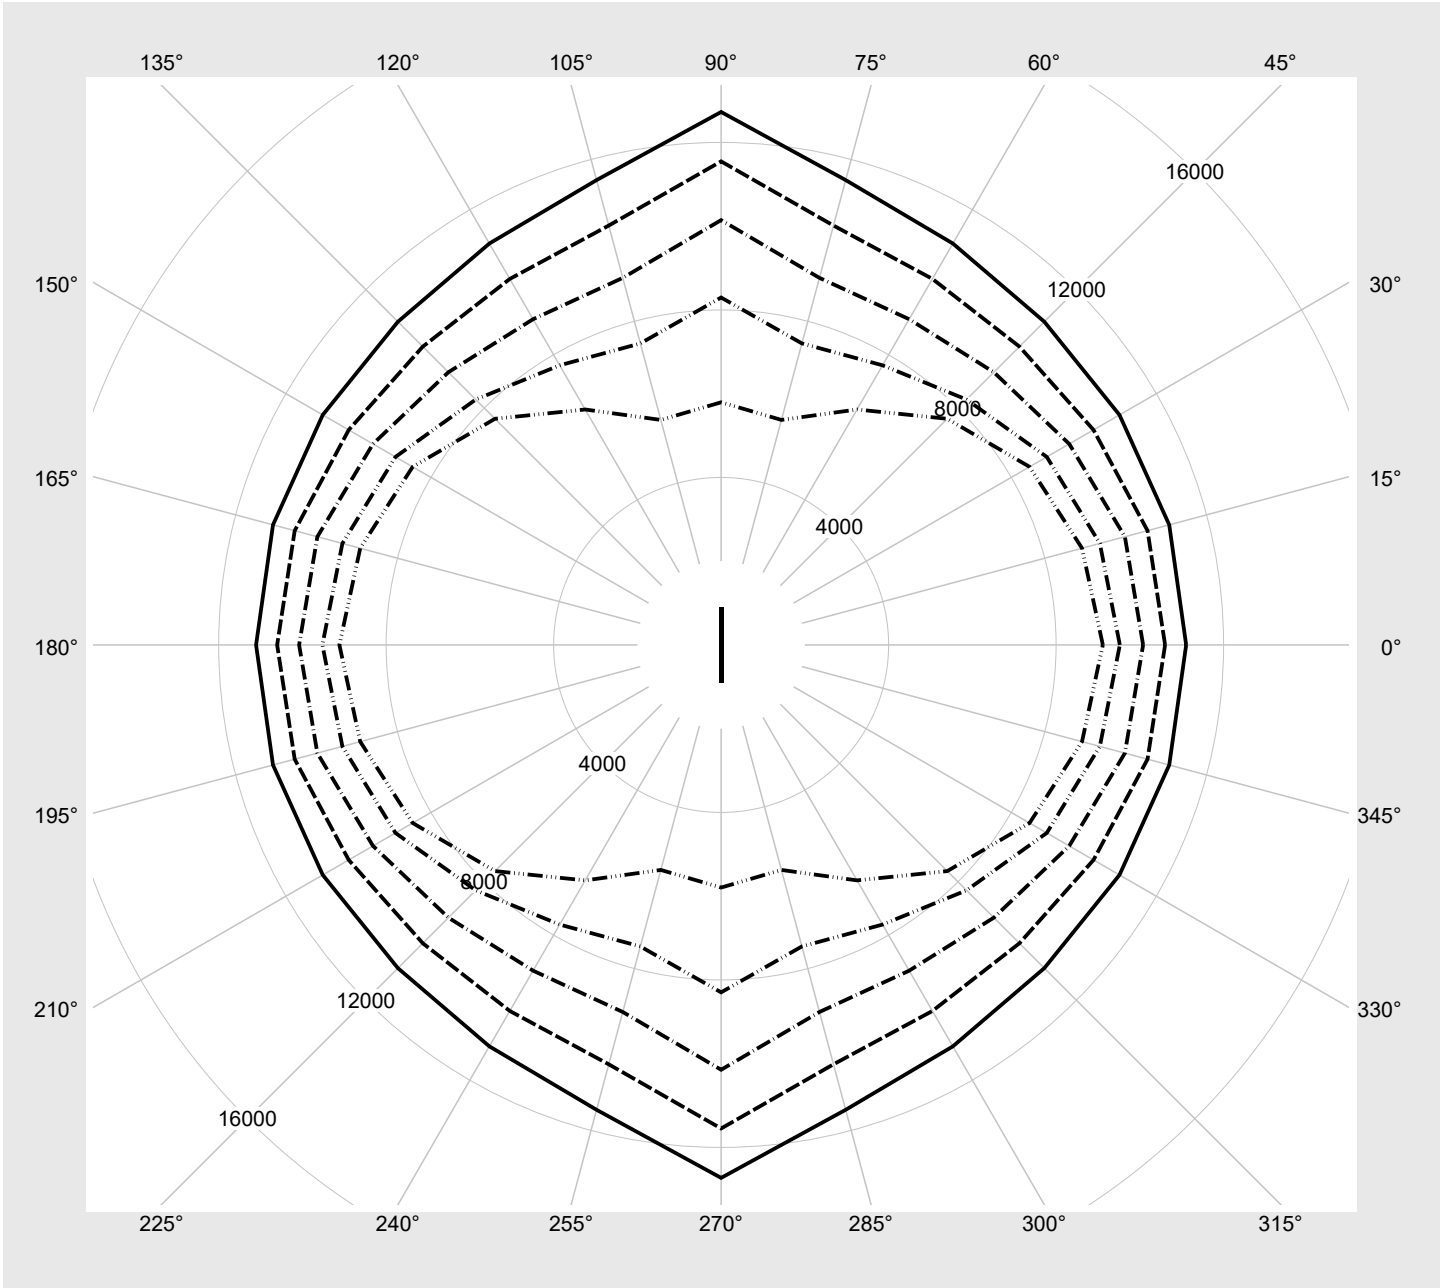

Photometric test report

Family Monsun® 11	Order number: 51FP10MP680L EAN: 4069025273994	LP number 58939_172
Multilumen Table	environmental temperature: 25°C	siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	7970	45.1
2	A	C	F	7400	41.6
3	A	D	E	6750	37.6
4	A	D	F	6170	34.1
5	B	C	E	5580	30.7
6	B	C	F	4970	27.2
7	B	D	E	4370	23.8
8	B	D	F	4060	22.1