

Photometric test report

Family
Monsun® 11



Order number: 51FP207P467L3G
EAN: 4069025280473

Version

Lamps

Controlgear

Setting

Rated values

prismatic diffuser, opal, polycarbonate, wide distribution

LED 4000 K | CRI ≥ 80

ECG


emergency light operation: 3 h

Net luminous flux = 890 lm
Power consumption = 6.5 W
Luminous efficacy = 136.9 lm/W

LP number
59060_144

serial
documentation
30.09.2024

siteco

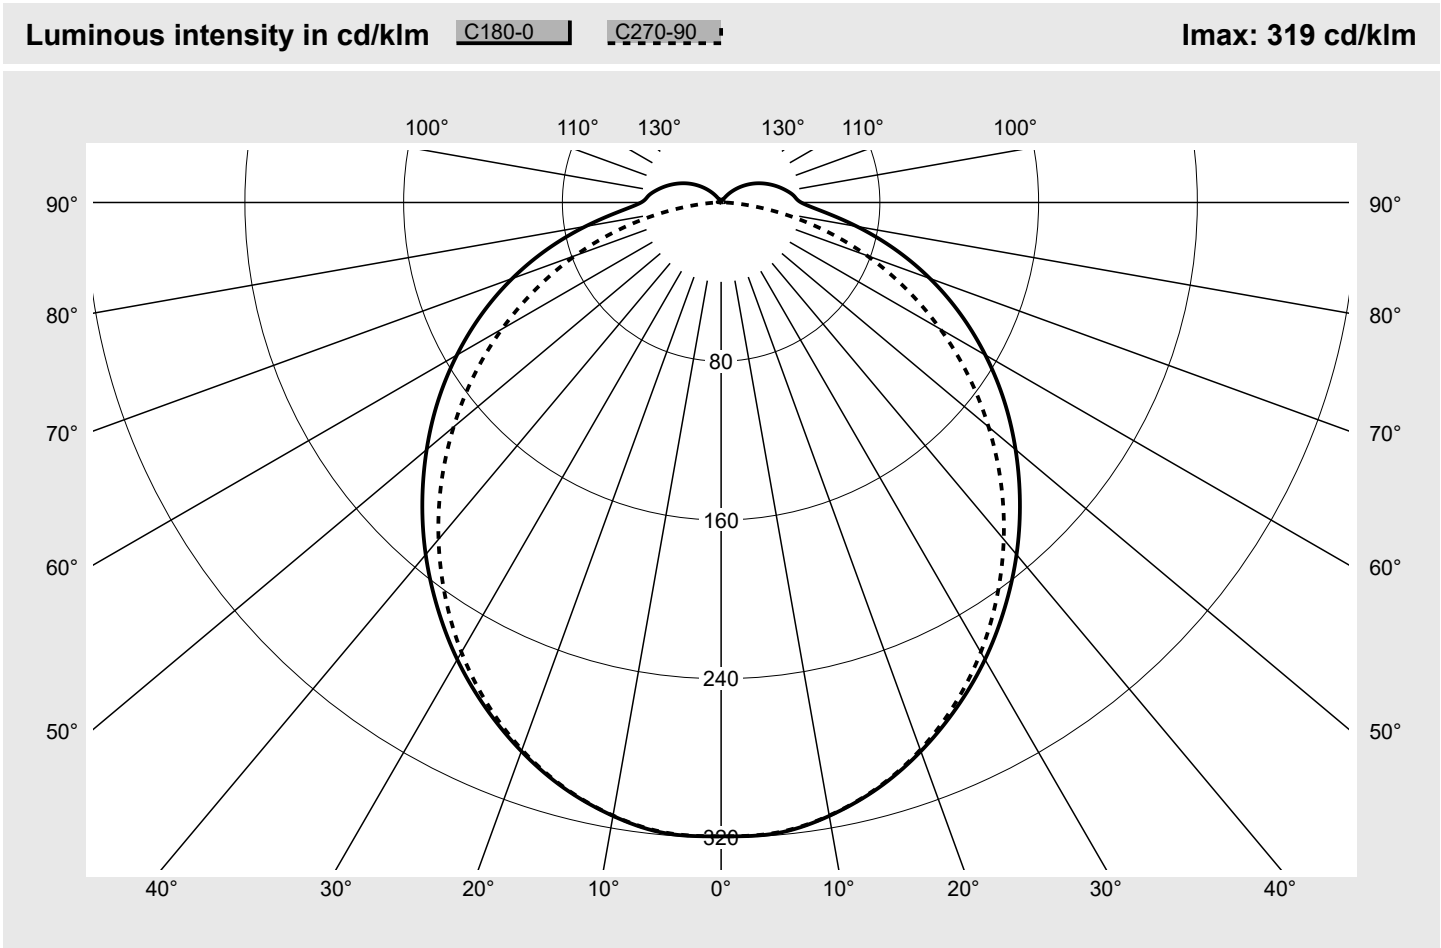

Classifications		Luminaire light output ratios	
DIN 5040	A 4 1	η_{LB}	100.0%
CIE	N1=45 N2=75 N3=93	ϕ_u	93.7%
	N4=94 N5=100	ϕ_o	6.3%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 11	Order number: 51FP207P467L3G EAN: 4069025280473	LP number 59060_144
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	319.4	319.4	319.4	319.4	319.4	319.4	319.4	1.9	1.9
5°	319.1	317.8	316.0	317.2	318.6	318.6	318.8	15.2	17.1
10°	313.9	312.8	311.0	312.1	313.5	313.5	313.7	29.8	46.9
15°	305.6	304.7	302.7	303.7	305.0	304.9	305.2	43.2	90.1
20°	294.3	293.5	291.4	292.2	293.3	293.1	293.5	54.9	145.0
25°	280.9	280.2	277.7	277.9	278.8	278.5	278.8	64.6	209.6
30°	265.9	265.3	262.4	261.6	261.9	261.4	261.7	72.0	281.6
35°	249.2	248.5	245.6	243.7	242.9	242.2	242.4	77.0	358.5
40°	231.6	230.8	227.5	224.6	222.7	221.4	221.6	79.5	438.0
45°	212.9	211.8	208.5	204.2	201.3	199.0	199.4	79.5	517.5
50°	193.7	192.3	188.8	183.7	179.4	175.9	176.0	77.3	594.9
55°	174.1	172.4	168.8	162.7	157.2	152.3	152.1	73.1	667.9
60°	153.8	152.1	148.1	141.4	134.9	128.8	127.5	66.9	734.9
65°	133.1	131.4	127.0	119.9	112.8	105.5	102.8	59.2	794.0
70°	112.0	110.4	105.0	98.0	90.2	82.2	78.2	49.9	843.9
75°	90.5	88.8	83.0	75.7	67.3	58.8	53.6	39.3	883.2
80°	69.4	67.4	62.0	54.0	45.3	36.4	30.4	28.3	911.6
85°	51.2	49.1	43.8	35.9	26.7	17.7	11.3	18.6	930.2
90°	40.3	38.3	33.0	25.3	16.4	7.5	1.9	12.9	943.1
95°	36.9	35.1	30.2	22.8	14.1	5.6	1.6	11.6	954.7
100°	33.7	31.9	27.1	20.1	11.9	4.0	1.5	10.1	964.8
105°	30.1	28.5	23.8	17.3	9.5	2.6	1.3	8.6	973.4
110°	26.5	24.6	20.5	14.4	7.3	1.5	1.2	7.1	980.4
115°	22.8	21.1	17.3	11.6	5.2	1.3	1.2	5.7	986.1
120°	19.1	17.5	14.1	8.9	3.4	1.3	1.1	4.4	990.5
125°	15.4	13.9	10.8	6.2	1.7	1.2	1.0	3.2	993.6
130°	11.8	10.5	7.7	3.9	1.4	1.2	1.0	2.2	995.8
135°	8.3	7.2	5.0	2.0	1.4	1.2	1.1	1.4	997.2
140°	5.1	4.3	2.5	1.6	1.3	1.1	1.0	0.8	998.0
145°	2.4	2.0	1.8	1.6	1.4	1.2	1.2	0.5	998.5
150°	1.9	1.9	1.8	1.5	1.4	1.3	1.2	0.4	999.0
155°	1.8	1.8	1.6	1.5	1.4	1.3	1.3	0.4	999.3
160°	1.6	1.6	1.5	1.5	1.4	1.4	1.3	0.3	999.6
165°	1.5	1.5	1.4	1.4	1.4	1.4	1.3	0.2	999.8
170°	1.4	1.4	1.4	1.4	1.4	1.4	1.3	0.1	999.9
175°	1.3	1.3	1.3	1.4	1.4	1.4	1.3	0.1	1000.0
180°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.0	1000.0

Photometric test report

Family Monsun® 11	Order number: 51FP207P467L3G EAN: 4069025280473	LP number 59060_144
----------------------	--	------------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	13.7	15.4	14.0	15.7	16.1	13.5	15.2	13.9	15.5	15.9
	3H	15.5	17.1	15.9	17.4	17.8	15.1	16.6	15.4	17.0	17.3
	4H	16.3	17.8	16.7	18.2	18.5	15.7	17.2	16.1	17.5	17.9
	6H	17.1	18.4	17.5	18.8	19.2	16.1	17.5	16.5	17.8	18.2
	8H	17.4	18.7	17.8	19.1	19.5	16.2	17.5	16.7	17.9	18.3
	12H	17.7	18.9	18.1	19.3	19.7	16.3	17.5	16.7	17.9	18.3
4H	2H	14.4	15.9	14.8	16.3	16.6	14.3	15.8	14.7	16.1	16.5
	3H	16.4	17.7	16.9	18.1	18.5	16.0	17.3	16.5	17.7	18.1
	4H	17.4	18.6	17.8	19.0	19.4	16.8	17.9	17.2	18.3	18.8
	6H	18.3	19.3	18.7	19.7	20.2	17.3	18.3	17.8	18.8	19.2
	8H	18.7	19.6	19.1	20.0	20.5	17.5	18.4	17.9	18.9	19.3
	12H	19.0	19.9	19.5	20.3	20.8	17.6	18.4	18.1	18.9	19.4
8H	4H	17.7	18.7	18.2	19.1	19.6	17.2	18.1	17.7	18.6	19.0
	6H	18.8	19.6	19.3	20.0	20.5	17.9	18.7	18.4	19.1	19.6
	8H	19.3	20.0	19.8	20.5	21.0	18.1	18.8	18.6	19.3	19.8
	12H	19.8	20.4	20.3	20.9	21.4	18.3	18.9	18.8	19.4	19.9
12H	4H	17.8	18.6	18.3	19.1	19.6	17.3	18.1	17.8	18.6	19.1
	6H	18.9	19.6	19.4	20.0	20.6	18.0	18.7	18.5	19.2	19.7
	8H	19.4	20.0	19.9	20.5	21.0	18.3	18.9	18.8	19.4	19.9

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1590 B = 87		H(C0) = 21 H(C90) = 21		H(C180) = 21 H(C270) = 21	
C-planes	γ	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°				
		Luminance in cd/m²									
	45°	1560.8	1558.7	1560.4	1574.8	1617.5	1683.9	1790.3			
	50°	1505.8	1501.4	1503.7	1514.1	1551.5	1615.6	1734.0			
	55°	1452.3	1445.2	1447.4	1451.7	1483.4	1542.6	1674.3			
	60°	1395.2	1388.1	1387.6	1387.4	1412.8	1466.1	1604.1			
	65°	1335.1	1327.6	1321.5	1317.4	1337.8	1382.3	1521.2			
	70°	1266.7	1258.5	1240.9	1233.3	1244.7	1280.7	1419.1			
	75°	1183.2	1172.7	1143.5	1125.8	1120.5	1141.5	1270.8			
	80°	1085.8	1066.7	1033.8	989.2	958.8	945.5	1049.5			
	85°	1006.4	979.4	933.3	865.9	784.0	700.7	725.9			

Photometric test report

Family
Monsun® 11

Order number: **51FP207P467L3G**
EAN: **4069025280473**

LP number
59060_144

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

sit

eco

