

Photometric test report

Family
Monsun® 11



Order number: 51FP207P4B0U
EAN: 4069025242570

Version

Lamps

Controlgear

Rated values

prismatic diffuser, opal, polycarbonate, wide distribution

LED 4000 K | CRI ≥ 80


ECG

Net luminous flux = 10910 lm
Power consumption = 62.4 W
Luminous efficacy = 174.8 lm/W

LP number
59060_132

serial
documentation
20.08.2024

siteco

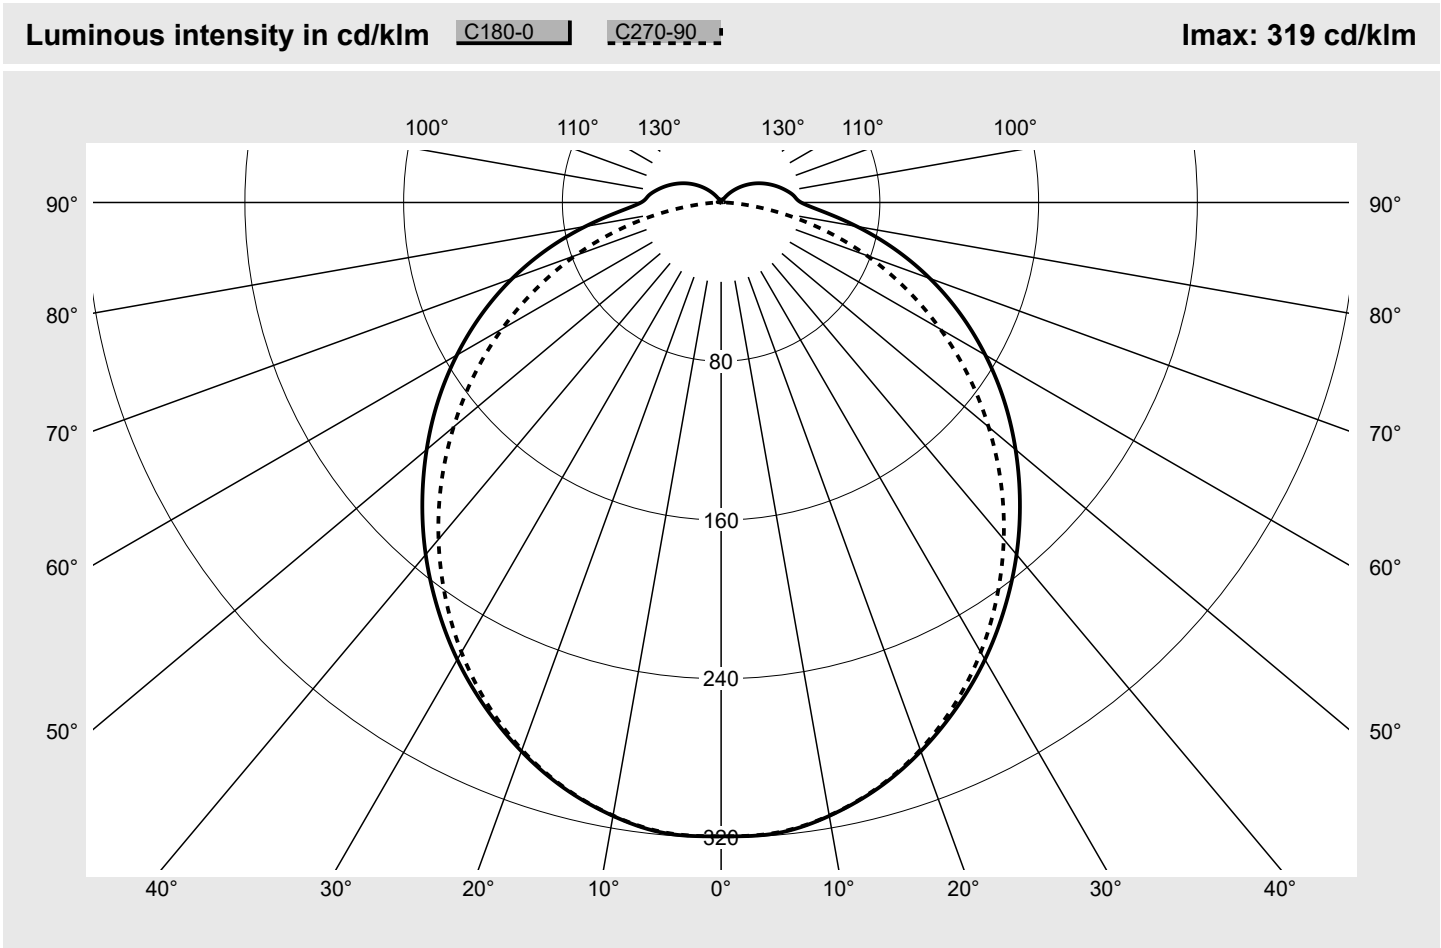

Classifications		Luminaire light output ratios	
DIN 5040	A 4 1	η_{LB}	100.0%
CIE	N1=45 N2=75 N3=93	ϕ_u	93.7%
	N4=94 N5=100	ϕ_o	6.3%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 11	Order number: 51FP207P4B0U EAN: 4069025242570	LP number 59060_132
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	319.4	319.4	319.4	319.4	319.4	319.4	319.4	1.9	1.9
5°	319.1	317.8	316.0	317.2	318.6	318.6	318.8	15.2	17.1
10°	313.9	312.8	311.0	312.1	313.5	313.5	313.7	29.8	46.9
15°	305.6	304.7	302.7	303.7	305.0	304.9	305.2	43.2	90.1
20°	294.3	293.5	291.4	292.2	293.3	293.1	293.5	54.9	145.0
25°	280.9	280.2	277.7	277.9	278.8	278.5	278.8	64.6	209.6
30°	265.9	265.3	262.4	261.6	261.9	261.4	261.7	72.0	281.6
35°	249.2	248.5	245.6	243.7	242.9	242.2	242.4	77.0	358.5
40°	231.6	230.8	227.5	224.6	222.7	221.4	221.6	79.5	438.0
45°	212.9	211.8	208.5	204.2	201.3	199.0	199.4	79.5	517.5
50°	193.7	192.3	188.8	183.7	179.4	175.9	176.0	77.3	594.9
55°	174.1	172.4	168.8	162.7	157.2	152.3	152.1	73.1	667.9
60°	153.8	152.1	148.1	141.4	134.9	128.8	127.5	66.9	734.9
65°	133.1	131.4	127.0	119.9	112.8	105.5	102.8	59.2	794.0
70°	112.0	110.4	105.0	98.0	90.2	82.2	78.2	49.9	843.9
75°	90.5	88.8	83.0	75.7	67.3	58.8	53.6	39.3	883.2
80°	69.4	67.4	62.0	54.0	45.3	36.4	30.4	28.3	911.6
85°	51.2	49.1	43.8	35.9	26.7	17.7	11.3	18.6	930.2
90°	40.3	38.3	33.0	25.3	16.4	7.5	1.9	12.9	943.1
95°	36.9	35.1	30.2	22.8	14.1	5.6	1.6	11.6	954.7
100°	33.7	31.9	27.1	20.1	11.9	4.0	1.5	10.1	964.8
105°	30.1	28.5	23.8	17.3	9.5	2.6	1.3	8.6	973.4
110°	26.5	24.6	20.5	14.4	7.3	1.5	1.2	7.1	980.4
115°	22.8	21.1	17.3	11.6	5.2	1.3	1.2	5.7	986.1
120°	19.1	17.5	14.1	8.9	3.4	1.3	1.1	4.4	990.5
125°	15.4	13.9	10.8	6.2	1.7	1.2	1.0	3.2	993.6
130°	11.8	10.5	7.7	3.9	1.4	1.2	1.0	2.2	995.8
135°	8.3	7.2	5.0	2.0	1.4	1.2	1.1	1.4	997.2
140°	5.1	4.3	2.5	1.6	1.3	1.1	1.0	0.8	998.0
145°	2.4	2.0	1.8	1.6	1.4	1.2	1.2	0.5	998.5
150°	1.9	1.9	1.8	1.5	1.4	1.3	1.2	0.4	999.0
155°	1.8	1.8	1.6	1.5	1.4	1.3	1.3	0.4	999.3
160°	1.6	1.6	1.5	1.5	1.4	1.4	1.3	0.3	999.6
165°	1.5	1.5	1.4	1.4	1.4	1.4	1.3	0.2	999.8
170°	1.4	1.4	1.4	1.4	1.4	1.4	1.3	0.1	999.9
175°	1.3	1.3	1.3	1.4	1.4	1.4	1.3	0.1	1000.0
180°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.0	1000.0

Photometric test report

Family Monsun® 11			Order number: 51FP207P4B0U EAN: 4069025242570							LP number 59060_132	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	22.4	24.1	22.8	24.4	24.8	22.2	23.9	22.6	24.3	24.6
	3H	24.2	25.8	24.6	26.1	26.5	23.8	25.3	24.1	25.7	26.0
	4H	25.0	26.5	25.4	26.9	27.2	24.4	25.9	24.8	26.2	26.6
	6H	25.8	27.1	26.2	27.5	27.9	24.8	26.2	25.2	26.5	26.9
	8H	26.1	27.4	26.5	27.8	28.2	24.9	26.2	25.4	26.6	27.0
	12H	26.4	27.6	26.8	28.0	28.4	25.0	26.2	25.4	26.6	27.1
4H	2H	23.1	24.6	23.5	25.0	25.3	23.0	24.5	23.4	24.8	25.2
	3H	25.1	26.4	25.6	26.8	27.2	24.7	26.0	25.2	26.4	26.8
	4H	26.1	27.3	26.5	27.7	28.1	25.5	26.6	25.9	27.0	27.5
	6H	27.0	28.0	27.4	28.4	28.9	26.0	27.0	26.5	27.5	27.9
	8H	27.4	28.3	27.8	28.7	29.2	26.2	27.1	26.6	27.6	28.0
	12H	27.7	28.6	28.2	29.0	29.5	26.3	27.1	26.8	27.6	28.1
8H	4H	26.4	27.4	26.9	27.8	28.3	25.9	26.8	26.4	27.3	27.8
	6H	27.5	28.3	28.0	28.7	29.2	26.6	27.4	27.1	27.8	28.3
	8H	28.0	28.7	28.5	29.2	29.7	26.8	27.5	27.3	28.0	28.5
	12H	28.5	29.1	29.0	29.6	30.1	27.0	27.6	27.5	28.1	28.6
12H	4H	26.5	27.3	27.0	27.8	28.3	26.0	26.8	26.5	27.3	27.8
	6H	27.6	28.3	28.1	28.7	29.3	26.7	27.4	27.2	27.9	28.4
	8H	28.1	28.7	28.6	29.2	29.8	27.0	27.6	27.5	28.1	28.7

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1590 B = 87	H(C0) = 21 H(C90) = 21	H(C180) = 21 H(C270) = 21
C-planes	γ	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
			Luminance in cd/m²					
45°		19133.5	19107.1	19128.6	19304.4	19827.6	20641.8	21946.4
50°		18458.6	18404.5	18433.5	18560.7	19018.9	19804.1	21256.5
55°		17803.3	17716.0	17742.5	17795.5	18184.1	18909.8	20524.6
60°		17102.8	17016.4	17009.3	17007.3	17319.1	17971.9	19663.3
65°		16366.2	16274.5	16199.9	16148.8	16399.0	16945.3	18647.3
70°		15528.3	15427.0	15211.3	15118.0	15257.5	15699.8	17395.6
75°		14504.7	14375.4	14017.9	13800.4	13735.8	13992.9	15577.8
80°		13310.7	13075.8	12672.9	12126.4	11753.7	11590.5	12865.1
85°		12336.6	12006.5	11441.0	10615.0	9610.4	8589.0	8898.6

Photometric test report

Family
Monsun® 11

Order number: 51FP207P4B0U
EAN: 4069025242570

LP number
59060_132

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

