

Photometric test report

Family
Licross® 21 Opal

Order number: 52TL1DMN36XG
EAN: 4069025253286

LP number
59520_274



Version cover, opal, direct-/ indirect distribution, diffuse
Lamps LED 3000 K | CRI ≥ 80
Controlgear ECG Multilumen
Rated values Net luminous flux = 6300 lm
 Power consumption = 37.5 W
 Luminous efficacy = 168 lm/W

serial
documentation
02.12.2024


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 294 cd/klm

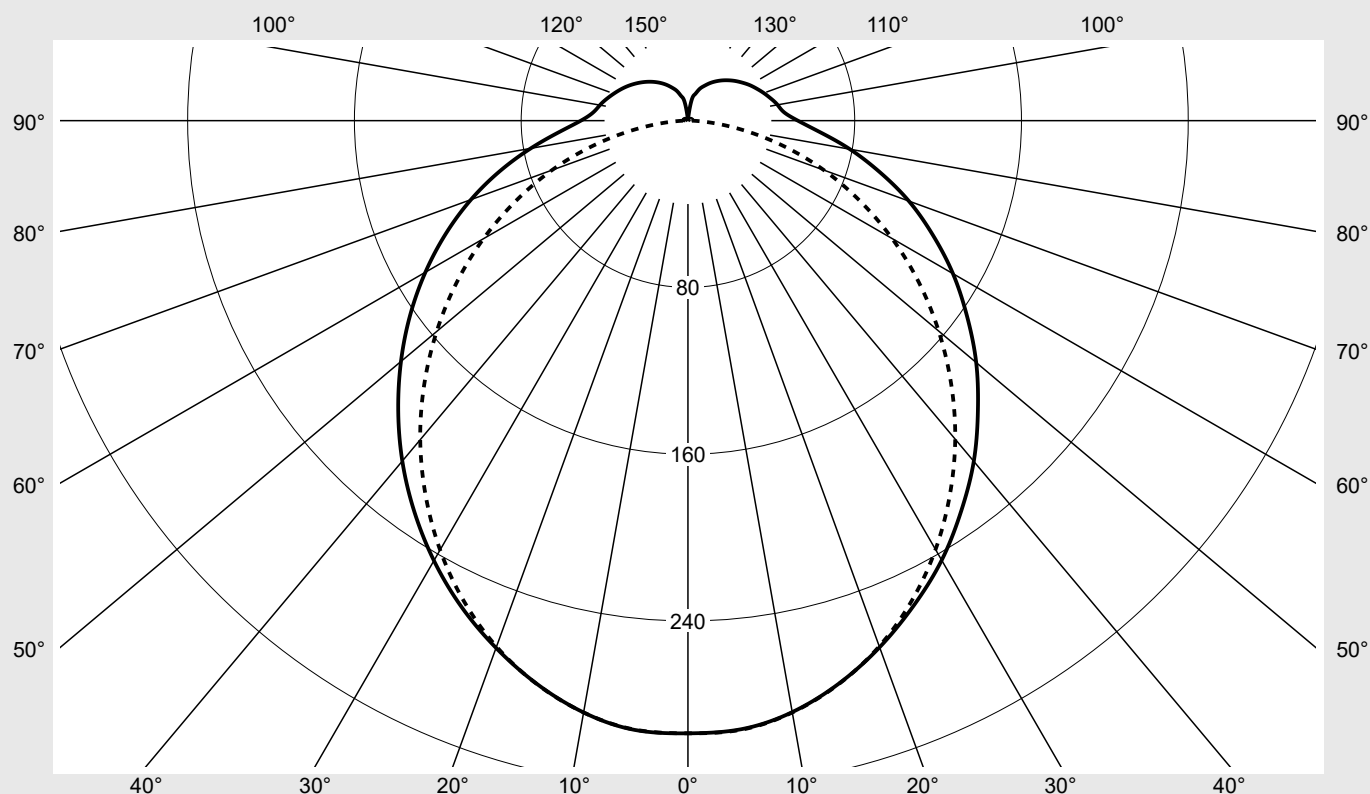

Classifications

DIN 5040 B 3 1
 CIE N1=44 N2=73 N3=91
 N4=87 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 87.4%
 ϕ_o 12.6%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Opal	Order number: 52TL1DMN36XG EAN: 4069025253286	LP number 59520_274
Table of values for luminous intensities		Maximum luminous intensity

sITeco

C- planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9
5°	293.1	292.7	289.9	291.0	293.1	293.0	293.3	293.1	293.1	292.5	291.2	291.6	293.4
10°	288.1	287.8	285.0	286.0	288.1	287.9	288.3	288.0	288.0	287.5	286.2	286.7	288.3
15°	279.6	279.4	276.6	277.6	279.6	279.4	279.8	279.5	279.5	279.0	277.7	278.4	279.8
20°	268.8	268.4	265.5	266.2	268.1	267.8	268.3	268.1	268.0	267.5	266.6	267.8	269.2
25°	256.5	256.4	252.9	252.4	253.9	253.4	254.1	253.8	253.8	253.6	254.0	255.9	257.2
30°	243.5	242.9	239.1	237.4	237.4	236.9	237.6	237.4	237.5	238.5	240.0	242.5	243.7
35°	228.6	228.2	223.9	221.1	219.2	218.5	219.1	218.9	219.7	221.9	224.6	227.5	228.9
40°	213.3	212.5	208.1	204.0	200.4	198.8	199.5	199.5	201.1	204.3	208.6	211.7	213.2
45°	196.7	195.9	191.2	185.9	180.8	177.8	178.6	178.3	181.6	186.0	191.4	194.8	196.6
50°	180.5	179.0	174.4	167.8	161.5	156.5	157.0	156.9	161.7	167.6	173.9	177.7	179.7
55°	163.4	162.0	157.2	149.2	141.7	135.1	135.2	135.5	141.8	149.1	156.1	160.5	162.7
60°	146.8	144.8	139.8	131.0	122.1	114.1	113.1	114.2	121.9	130.6	138.3	143.3	145.4
65°	129.6	127.7	122.3	112.9	103.0	93.4	91.0	93.7	102.6	112.1	120.5	126.2	128.1
70°	112.8	110.6	104.4	95.0	83.9	73.2	69.4	73.2	83.4	93.6	102.3	109.1	110.8
75°	95.2	93.5	86.3	76.8	64.8	53.0	48.0	53.1	64.1	74.9	84.3	91.4	93.3
80°	78.9	76.8	69.4	59.0	47.0	34.5	28.0	34.2	45.8	57.3	67.7	74.1	76.6
85°	63.7	61.7	54.7	44.0	31.4	18.8	11.3	18.6	30.6	42.7	52.6	59.2	61.9
90°	52.7	50.3	47.2	33.6	21.8	9.7	1.7	9.7	21.3	32.8	42.6	49.1	51.4
95°	46.3	44.0	38.4	29.9	19.4	8.9	1.8	8.9	19.3	29.6	38.3	43.8	45.6
100°	43.6	41.6	36.5	28.4	19.0	9.0	2.1	8.7	18.6	27.9	35.8	41.3	42.9
105°	41.1	39.4	34.3	27.0	18.2	9.1	2.1	8.8	17.9	26.7	33.7	38.6	40.4
110°	38.7	36.7	32.3	25.7	17.6	9.2	2.0	8.7	17.0	25.1	31.7	36.0	37.9
115°	36.4	34.4	30.4	24.3	17.0	9.3	1.9	8.8	16.4	23.6	29.8	33.7	35.5
120°	34.1	32.2	28.7	23.1	16.5	9.4	1.8	8.8	15.7	22.3	27.9	31.4	33.2
125°	31.8	30.1	26.8	21.8	15.8	9.4	1.6	8.8	15.0	21.0	26.0	29.2	30.9
130°	29.6	27.9	25.1	20.7	15.3	9.5	1.4	8.7	14.3	19.7	24.1	27.1	28.6
135°	27.4	25.8	23.3	19.5	14.6	8.1	1.3	7.6	13.7	18.5	22.3	24.9	26.4
140°	25.2	23.7	21.6	18.3	13.6	7.0	1.3	6.4	12.7	17.1	20.5	22.8	24.2
145°	23.0	21.6	19.8	16.6	12.1	6.4	1.2	5.9	11.1	15.6	18.8	20.7	21.9
150°	20.7	19.6	18.1	14.3	11.0	6.2	1.3	6.0	9.5	13.3	16.9	18.6	19.6
155°	18.4	17.4	15.6	12.5	8.2	5.5	1.3	5.2	7.5	11.1	14.5	16.4	17.3
160°	16.1	15.3	12.6	10.0	7.9	5.1	1.4	4.6	6.8	7.9	11.7	14.3	14.9
165°	13.1	12.1	8.6	7.8	8.1	5.4	1.4	4.8	6.9	7.0	6.9	11.2	12.1
170°	9.8	7.7	7.3	8.0	6.5	2.9	1.4	2.2	5.4	6.7	6.3	6.6	8.9
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Licross® 21 Opal	Order number: 52TL1DMN36XG EAN: 4069025253286	LP number 59520_274
----------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	1.8	1.8
5°	292.9	289.8	290.9	292.8	292.8	293.2	292.8	292.9	292.3	291.2	292.0	14.0	15.7
10°	288.0	285.0	285.8	287.9	287.8	288.3	287.9	288.0	287.3	286.3	287.0	27.3	43.1
15°	279.5	276.7	277.5	279.4	279.4	279.9	279.5	279.5	278.9	277.9	279.0	39.6	82.6
20°	268.9	265.7	266.2	268.0	267.9	268.5	268.2	268.1	267.5	266.6	267.7	50.2	132.8
25°	256.9	253.4	252.5	253.8	253.6	254.3	254.0	254.0	253.5	253.8	256.1	58.9	191.7
30°	243.4	239.6	237.7	237.4	237.1	237.8	237.6	237.8	238.3	239.7	242.3	65.6	257.3
35°	228.5	224.4	221.4	219.4	218.7	219.4	219.3	219.8	221.8	224.6	228.0	70.0	327.3
40°	212.7	208.2	204.2	200.7	198.9	199.8	199.8	201.1	204.3	208.6	211.9	72.3	399.6
45°	195.8	191.1	185.9	181.0	177.8	178.9	178.7	181.7	186.2	191.6	195.6	72.3	472.0
50°	178.6	174.0	167.6	161.4	156.5	157.3	157.3	162.0	168.0	174.3	178.3	70.5	542.5
55°	161.2	156.5	148.8	141.5	135.3	135.5	135.8	142.2	149.7	156.9	161.8	66.9	609.4
60°	143.7	138.7	130.1	121.6	114.2	113.3	114.6	122.5	131.3	139.3	144.4	61.7	671.1
65°	126.5	121.0	111.8	102.3	93.3	91.1	94.0	103.2	113.1	121.8	128.0	55.2	726.3
70°	109.1	102.8	93.5	83.0	72.9	69.4	73.6	84.1	94.6	103.5	110.4	47.6	773.9
75°	91.6	84.7	75.4	63.7	52.5	47.9	53.5	65.0	76.2	85.9	93.4	39.0	812.9
80°	74.9	67.7	57.5	45.8	33.9	27.9	34.5	46.6	58.5	69.1	75.6	30.2	843.1
85°	59.9	53.1	42.6	30.4	18.3	11.1	18.9	31.3	43.7	53.8	61.1	22.2	865.3
90°	49.1	42.6	32.8	21.3	9.6	1.7	9.7	21.6	33.2	43.3	50.0	16.9	882.1
95°	43.4	38.0	29.6	19.2	8.8	1.8	8.9	19.4	29.7	38.6	44.5	14.9	897.1
100°	41.0	35.9	27.9	18.7	8.8	2.1	8.9	18.7	28.1	36.1	41.8	14.0	911.1
105°	38.7	33.7	26.5	17.8	8.7	2.1	9.0	18.1	27.0	34.2	39.3	13.1	924.2
110°	35.9	31.6	25.0	17.1	8.8	2.0	9.1	17.4	25.5	32.1	36.6	12.0	936.2
115°	33.6	29.7	23.6	16.4	8.7	1.9	9.3	16.9	24.2	30.4	34.4	11.0	947.2
120°	31.4	27.9	22.4	15.7	8.8	1.8	9.3	16.2	22.9	28.6	32.2	9.9	957.1
125°	29.2	26.0	21.1	15.0	8.7	1.6	9.4	15.7	21.7	26.8	30.1	8.9	966.0
130°	27.0	24.2	19.8	14.4	8.7	1.4	9.4	15.1	20.5	24.9	27.8	7.8	973.7
135°	24.9	22.4	18.6	13.7	7.3	1.3	8.2	14.6	19.3	23.2	25.8	6.7	980.4
140°	22.7	20.6	17.3	12.7	6.4	1.3	7.0	13.5	18.0	21.5	23.6	5.6	986.0
145°	20.6	18.9	15.7	11.3	5.8	1.2	6.5	12.0	15.8	19.8	21.6	4.5	990.5
150°	18.5	17.0	13.4	10.2	6.1	1.3	6.3	10.3	14.2	17.9	19.5	3.5	994.0
155°	16.4	14.6	11.8	7.5	4.9	1.3	5.8	8.1	12.0	15.5	17.4	2.6	996.6
160°	14.2	11.8	9.1	7.1	4.6	1.4	5.2	7.3	8.7	12.7	15.3	1.8	998.3
165°	11.1	8.0	7.1	7.6	4.8	1.4	5.5	7.3	7.6	7.6	12.0	1.1	999.4
170°	6.9	7.3	7.0	5.8	2.1	1.4	3.1	6.1	7.5	6.2	7.2	0.6	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Opal	Order number: 52TL1DMN36XG EAN: 4069025253286	LP number 59520_274
----------------------------	--	------------------------

UGR-Table		Standard room							siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	20.2	21.7	20.6	22.2	22.7	19.8	21.4	20.3	21.8	22.3
	3H	22.1	23.5	22.6	24.0	24.5	21.4	22.8	21.9	23.3	23.8
	4H	22.9	24.2	23.4	24.7	25.3	21.9	23.2	22.4	23.7	24.3
	6H	23.7	24.9	24.2	25.4	26.0	22.3	23.5	22.8	24.0	24.6
	8H	24.1	25.2	24.6	25.8	26.4	22.4	23.6	22.9	24.1	24.7
	12H	24.4	25.4	25.0	26.0	26.7	22.4	23.5	23.0	24.1	24.7
4H	2H	20.8	22.2	21.3	22.7	23.2	20.5	21.8	21.0	22.3	22.9
	3H	22.9	24.0	23.4	24.6	25.2	22.2	23.3	22.8	23.9	24.5
	4H	23.9	24.9	24.5	25.5	26.1	22.9	23.9	23.5	24.5	25.1
	6H	24.8	25.7	25.4	26.3	27.0	23.4	24.3	24.0	24.9	25.5
	8H	25.3	26.1	25.9	26.7	27.4	23.6	24.4	24.2	25.0	25.7
	12H	25.7	26.4	26.4	27.1	27.8	23.6	24.4	24.3	25.0	25.7
8H	4H	24.2	25.0	24.8	25.6	26.3	23.3	24.1	23.9	24.7	25.4
	6H	25.4	26.0	26.0	26.7	27.4	24.0	24.7	24.6	25.3	26.0
	8H	25.9	26.5	26.6	27.2	27.9	24.2	24.9	24.9	25.5	26.2
	12H	26.5	27.0	27.2	27.7	28.4	24.4	24.9	25.0	25.6	26.3
12H	4H	24.2	24.9	24.8	25.6	26.3	23.3	24.1	24.0	24.7	25.4
	6H	25.4	26.0	26.0	26.7	27.4	24.1	24.7	24.8	25.4	26.1
	8H	26.0	26.6	26.7	27.2	28.0	24.4	24.9	25.1	25.6	26.4

Luminance table		Max. for $\gamma \geq 65^\circ$					Photometric dimensions in mm:		L = 1500 B = 76	H(C0) = 25 H(C90) = 25	H(C180) = 25 H(C270) = 25		
C- planes		0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°
γ	Luminance in cd/m²												
45°	11569.0	11555.8	11988.7	13727.4	12037.0	11565.6	11559.5	11550.9	11999.4	13752.3	12042.3	11580.2	
50°	11149.2	11108.7	11443.0	13236.8	11460.3	11077.7	11099.1	11082.9	11437.3	13264.2	11477.6	11103.5	
55°	10712.7	10674.4	10874.8	12725.9	10881.0	10602.9	10665.0	10624.9	10862.3	12748.8	10912.1	10657.9	
60°	10337.0	10244.8	10302.8	12150.5	10289.1	10137.8	10240.1	10167.5	10261.8	12167.9	10337.0	10209.1	
65°	9933.6	9815.6	9732.0	11487.4	9693.8	9672.5	9821.8	9718.0	9663.2	11497.6	9755.0	9776.6	
70°	9572.2	9338.7	9093.1	10728.1	9031.7	9150.2	9400.3	9200.9	8987.8	10728.1	9110.6	9266.2	
75°	9125.0	8797.5	8301.9	9646.8	8205.5	8599.2	8946.5	8632.3	8159.8	9632.1	8319.6	8756.2	
80°	8764.4	8298.5	7424.7	8130.1	7241.6	8095.2	8503.4	8085.5	7234.0	8099.2	7365.7	8259.8	
85°	8480.1	7964.6	6534.6	6002.5	6372.6	7663.5	8241.7	7732.0	6320.3	5933.8	6517.7	7845.3	

Photometric test report

Family
Licross® 21 Opal

Order number: **52TL1DMN36XG**
EAN: **4069025253286**

LP number
59520_274

Luminance values in cd/m²

γ 65°

γ 70°


γ 75°

γ 80°

γ 85°

sit

eco

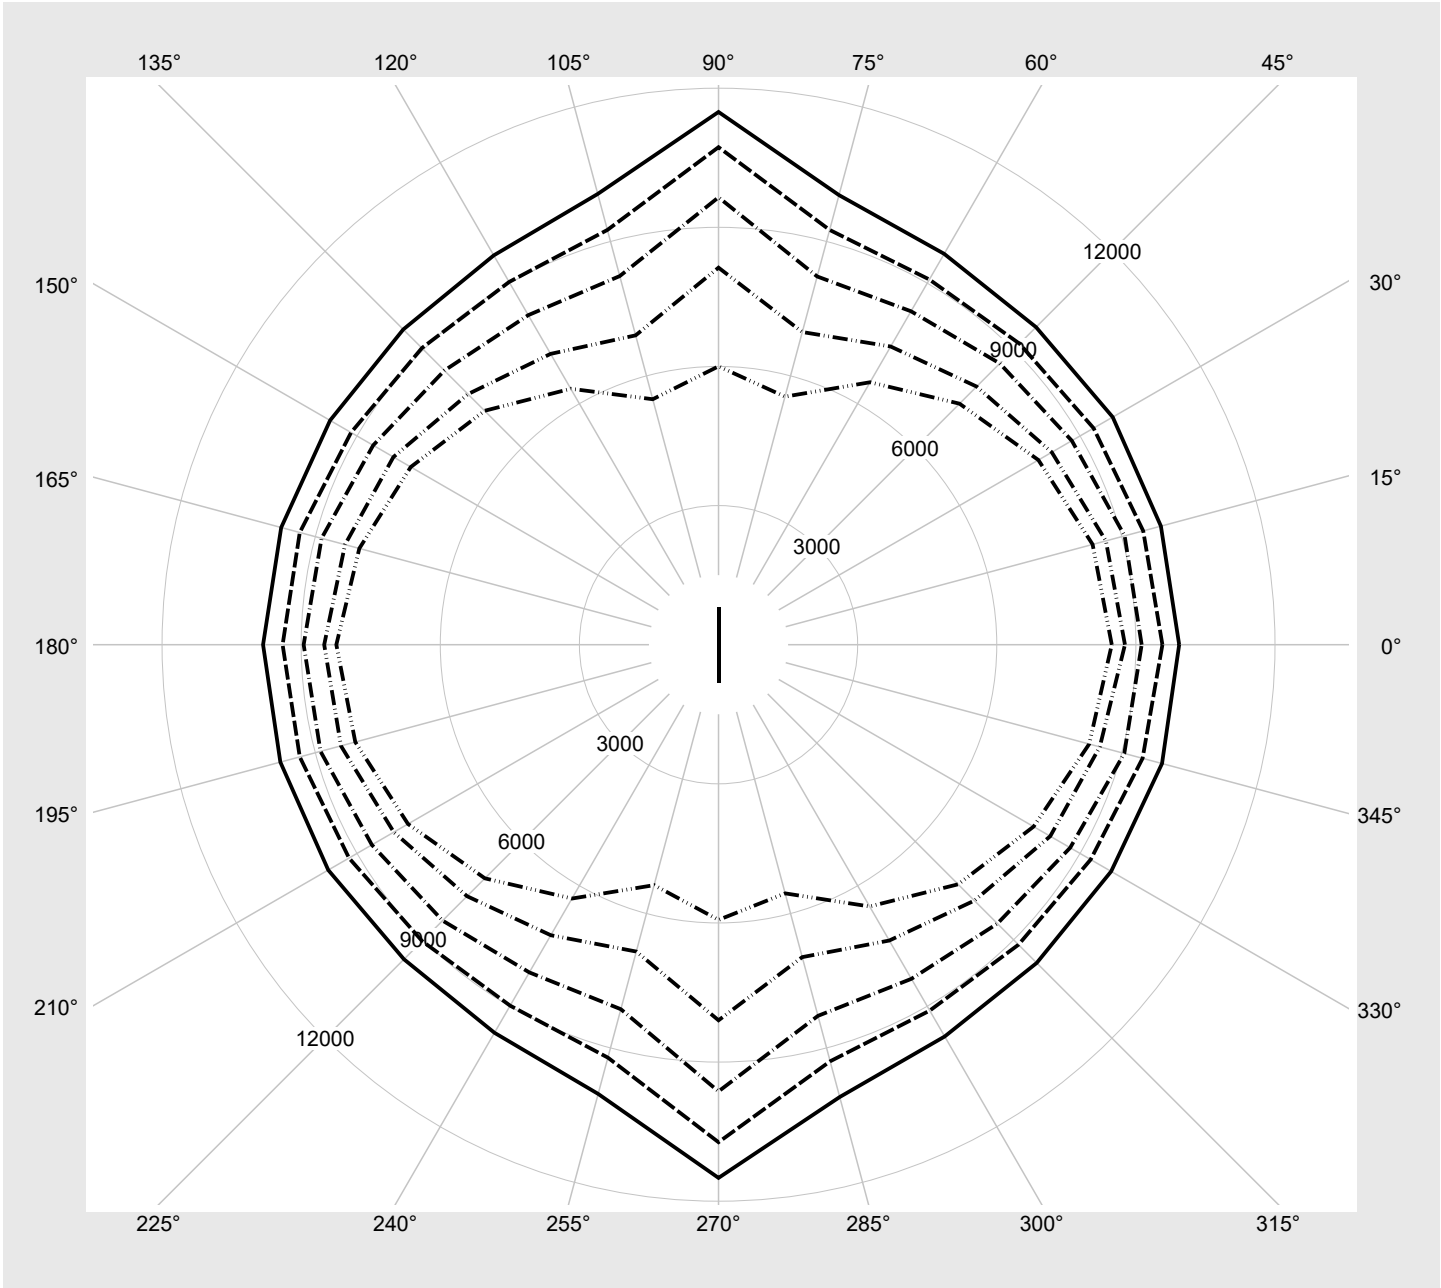

Photometric test report

Family
Licross® 21 Opal

Order number: 52TL1DMN36XG
EAN: 4069025253286

LP number
59520_274

Multilumen Table

environmental temperature: 25°C

sITeco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	6300	37.5
2	A	C	F	5960	35.4
3	A	D	E	5620	33.3
4	A	D	F	5340	31.6
5	B	C	E	4920	29.1
6	B	C	F	4630	27.4
7	B	D	E	4280	25.3
8	B	D	F	3920	23.2