

Photometric test report

Family
Streetlight 11 micro LED

Order number: 5XC1NC1F08CE
EAN: 4069025076458

LP number
59457_411



Version post-top or side-entry mounting
Optic asymmetric, extreme wide distribution with Back Light Control (ST1.0aB)
Cover transparent, PMMA
Lamps LED 2200 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Setting individual position
Rated values Net luminous flux = 1280 lm
 Power consumption = 14.0 W
 Luminous efficacy = 91.4 lm/W

serial
documentation
23.01.2025

siteco

Luminous intensity in cd/klm


C180-0

C195-15

C200-20

C270-90

Imax: 754 cd/klm

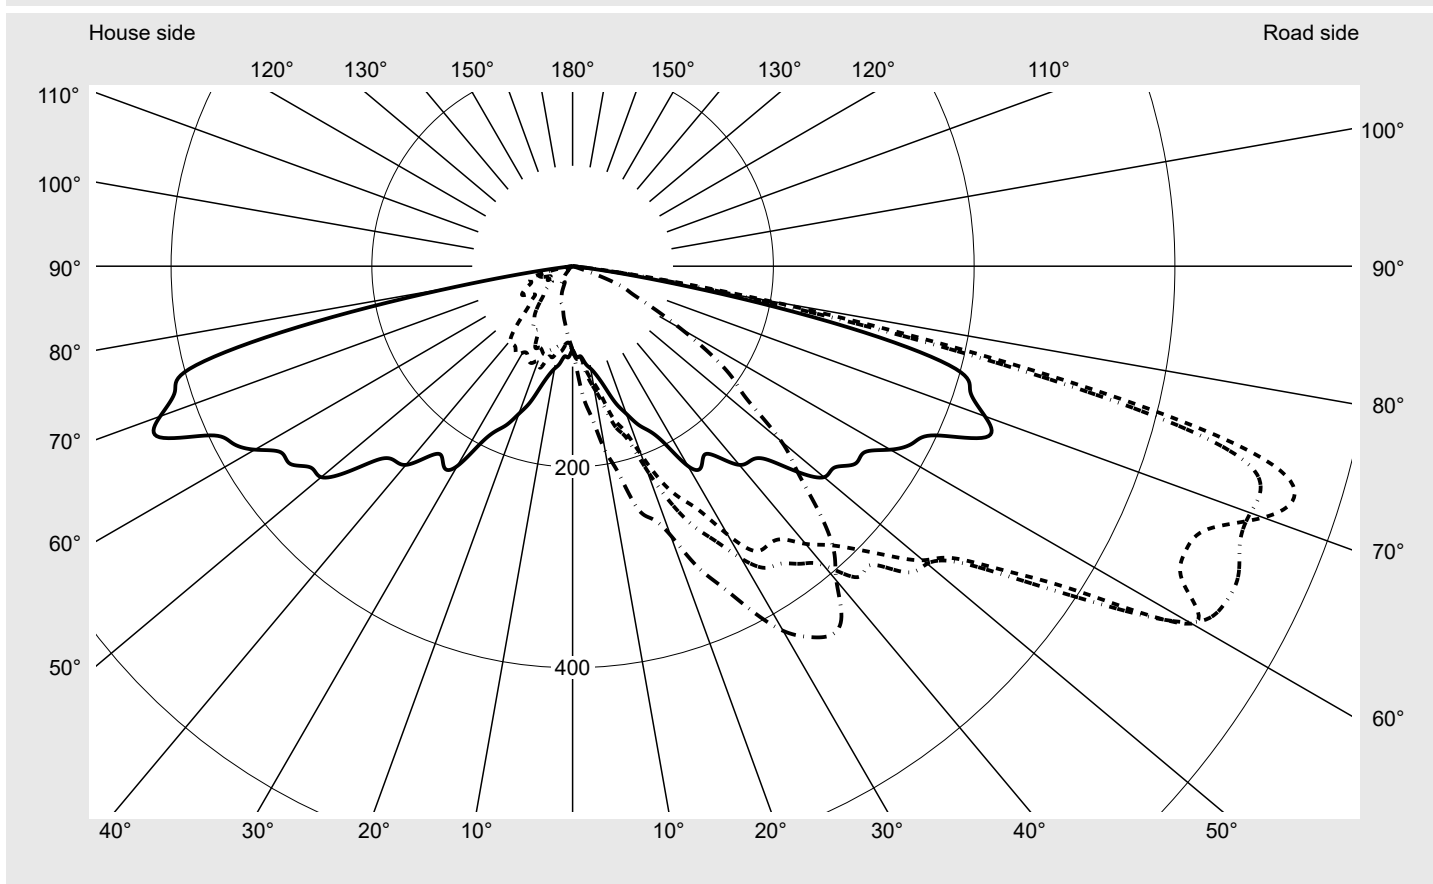

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	742.9
Imax 80°	194.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1NC1F08CE EAN: 4069025076458	LP number 59457_411
Envelope curve in cd/klm KMK 72.5° KMK 70° KMK 67.5° KMK 65°		

siteco

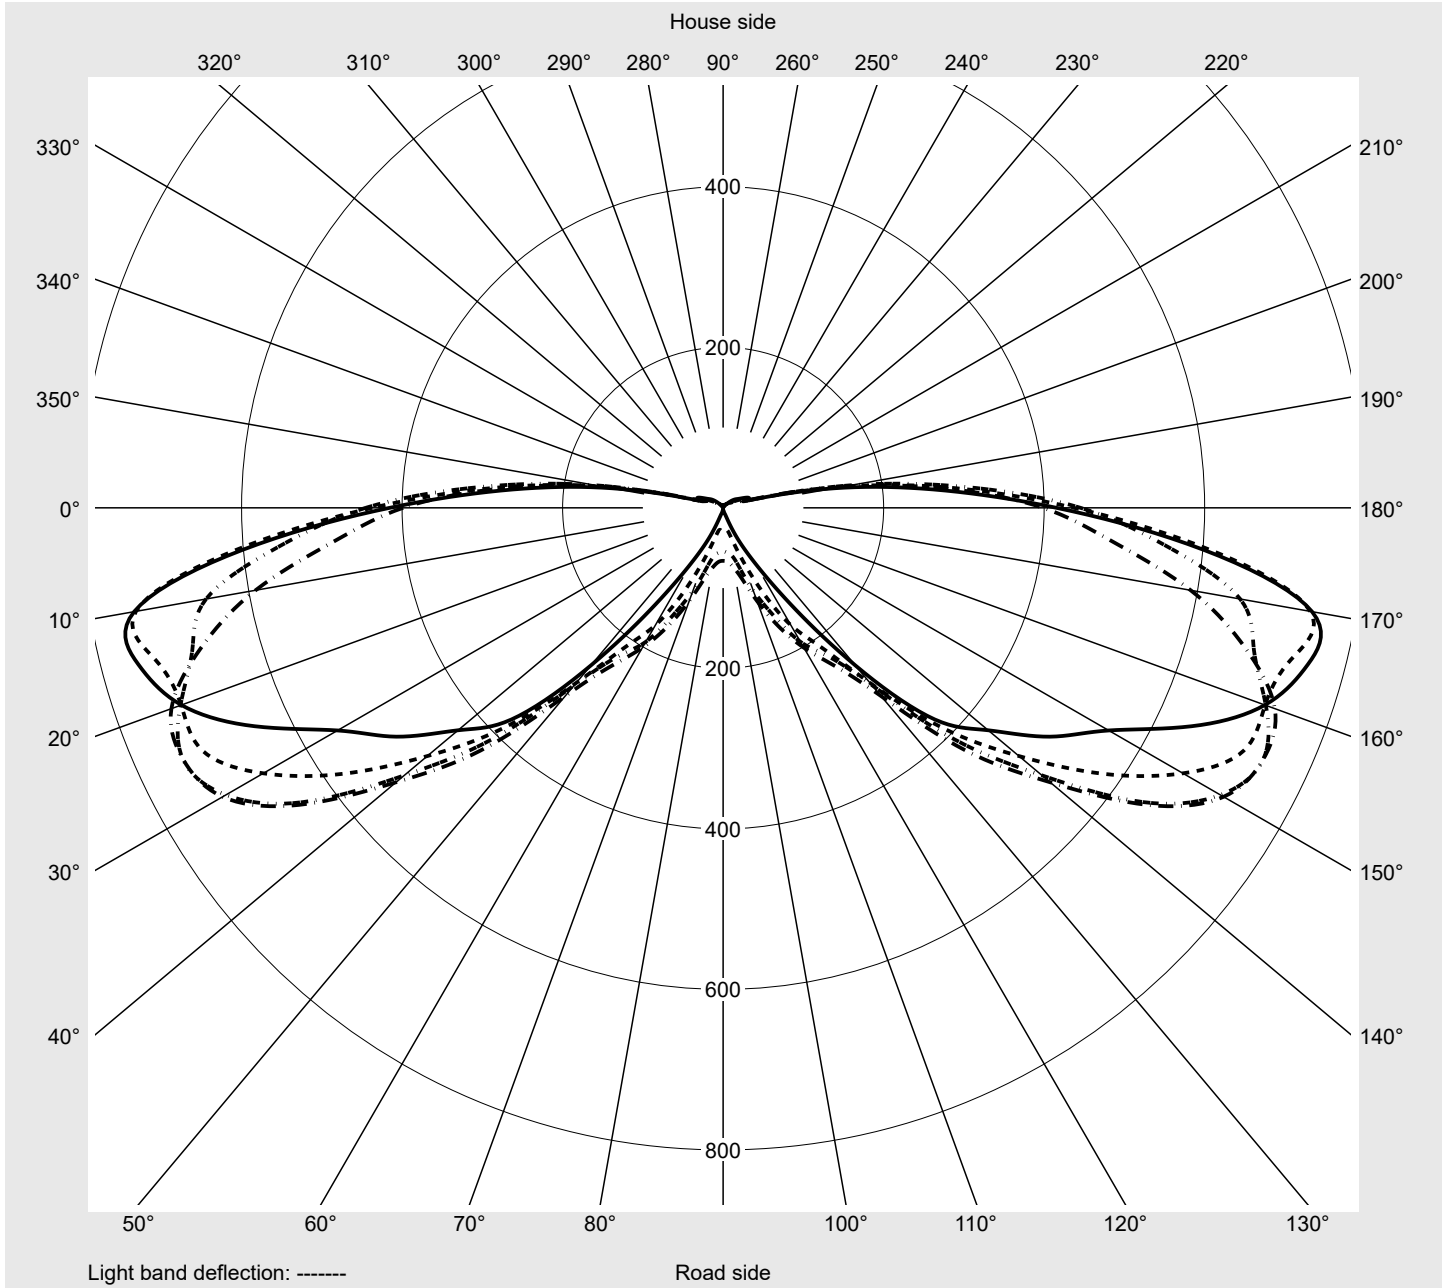

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1NC1F08CE EAN: 4069025076458	LP number 59457_411
------------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
2,5°	90.7	90.4	89.6	89.6	92.6	95.8	96.7	97.7	98.9	99.7	99.4	98.3	98.9
5,0°	90.1	90.9	91.0	90.8	93.4	99.4	105.1	110.0	112.1	113.3	116.6	120.2	123.6
7,5°	97.8	100.7	102.4	105.0	109.4	114.0	119.6	126.7	130.4	132.5	135.6	139.9	145.0
10,0°	103.6	106.4	110.5	116.9	123.4	128.7	132.7	139.3	141.8	143.6	147.6	151.3	157.4
12,5°	111.8	117.3	123.2	132.2	141.1	147.9	152.1	158.1	165.3	172.9	180.1	185.3	193.8
15,0°	125.2	133.6	145.8	157.3	166.0	174.5	179.6	187.6	195.8	203.8	214.1	219.5	222.2
17,5°	143.2	155.5	164.5	171.9	180.0	189.8	197.5	200.1	207.5	218.4	228.9	237.2	238.4
20,0°	156.4	173.2	183.5	200.0	215.7	230.8	239.2	240.9	243.5	246.5	255.5	265.9	271.5
22,5°	170.8	187.0	210.2	232.7	254.6	270.3	278.3	280.9	284.4	287.3	295.1	302.1	306.7
25,0°	181.3	201.9	229.5	255.3	285.9	298.3	297.6	301.1	310.9	320.5	327.1	336.2	345.9
27,5°	199.6	223.0	249.0	275.0	308.8	330.8	334.2	332.9	340.4	347.8	346.0	350.2	361.3
30,0°	229.9	263.1	284.9	308.6	336.3	357.1	363.1	360.8	363.2	367.2	369.3	373.6	377.3
32,5°	237.9	268.2	303.2	336.2	356.3	370.3	380.8	388.7	395.3	396.8	395.5	398.8	401.1
35,0°	229.2	258.8	302.6	339.1	361.7	384.4	397.9	409.4	417.6	415.7	411.6	408.9	410.5
37,5°	240.5	269.2	303.8	342.9	373.6	395.9	415.8	429.1	425.2	416.6	408.2	393.8	398.7
40,0°	258.4	286.2	322.8	361.1	388.8	409.4	426.1	433.8	426.7	417.1	404.6	397.1	398.3
42,5°	262.6	307.8	341.9	376.7	420.2	432.6	432.9	449.5	450.5	420.8	402.7	394.6	390.9
45,0°	271.8	332.1	375.9	398.6	420.7	449.8	466.6	471.6	458.9	428.9	404.4	386.4	378.1
47,5°	302.7	373.9	405.2	426.9	451.5	472.8	491.1	480.4	458.4	436.1	412.4	380.6	357.9
50,0°	327.0	400.8	432.0	455.7	461.1	473.9	487.7	483.4	462.4	434.6	408.1	362.7	325.3
52,5°	329.2	407.3	456.4	477.7	484.5	499.6	505.3	497.0	463.5	423.3	381.5	334.3	311.5
55,0°	343.4	414.5	489.4	530.3	545.3	562.1	551.7	525.4	475.1	419.2	362.9	303.1	278.0
57,5°	344.9	447.4	527.2	608.8	628.7	618.3	599.7	560.8	488.5	413.0	343.5	277.3	248.3
60,0°	365.5	499.4	616.7	712.2	709.4	673.8	648.7	595.7	500.0	408.6	330.9	277.1	243.0
62,5°	382.0	492.2	604.2	686.5	731.0	714.9	688.2	618.4	525.8	415.5	317.6	258.9	222.0
65,0°	398.7	488.0	591.6	673.3	731.6	742.3	720.1	645.3	532.0	427.9	306.2	239.1	201.3
67,5°	445.3	556.0	654.2	684.7	719.6	742.5	715.5	639.3	518.7	408.5	288.1	224.4	192.8
70,0°	437.2	611.3	742.9	732.2	718.6	715.8	661.6	577.7	481.2	388.9	284.8	211.1	168.8
72,5°	415.4	601.1	745.2	754.3	718.3	643.9	554.8	497.1	431.2	372.9	256.3	146.8	79.9
75,0°	395.0	544.9	656.0	682.3	642.3	531.3	429.6	403.8	358.9	245.3	111.8	36.6	10.0
77,5°	280.5	372.5	430.3	442.8	397.4	333.4	289.5	230.9	140.4	47.1	7.8	0.0	0.0
80,0°	118.6	154.3	189.4	194.9	165.3	140.7	101.2	41.4	8.9	0.0	0.0	0.0	0.0
82,5°	22.3	28.1	36.5	41.6	37.9	27.0	8.5	0.0	0.0	0.0	0.0	0.0	0.0
85,0°	0.0	0.0	0.0	0.1	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1NC1F08CE EAN: 4069025076458	LP number 59457_411
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
2,5°	98.6	99.1	101.0	101.8	103.4	104.7	86.5	82.9	78.7	76.7	75.0	73.9	74.2
5,0°	124.8	126.6	127.6	127.5	131.0	134.0	86.1	81.9	78.6	77.6	76.4	73.4	71.8
7,5°	147.8	149.0	148.4	151.1	154.5	154.8	94.1	89.6	85.3	81.2	77.6	75.0	71.4
10,0°	165.9	172.0	175.7	184.2	188.3	186.6	98.1	92.3	86.7	81.0	76.7	73.6	68.8
12,5°	202.3	207.5	211.3	213.9	213.7	211.2	104.3	98.4	92.9	85.1	78.2	71.2	63.9
15,0°	225.4	231.4	234.6	245.0	251.8	249.7	113.0	102.9	93.9	86.9	79.3	68.6	59.2
17,5°	239.2	244.6	249.2	255.0	260.6	264.0	129.0	117.8	105.9	92.1	77.5	68.1	58.0
20,0°	275.0	280.6	283.6	284.2	284.2	285.2	138.4	118.6	101.1	89.2	75.4	65.6	58.1
22,5°	310.7	314.2	315.9	318.0	321.4	323.4	151.1	127.7	104.3	87.8	75.3	63.7	53.3
25,0°	341.5	337.6	342.8	348.8	350.3	352.4	160.0	132.2	103.5	88.2	70.6	57.9	50.1
27,5°	374.8	380.5	383.8	387.9	388.0	387.2	175.8	140.1	98.2	74.1	61.4	53.3	44.7
30,0°	379.5	393.7	407.6	411.8	416.2	419.4	184.6	142.5	99.5	73.6	57.7	48.7	38.8
32,5°	401.0	403.5	412.2	426.4	435.0	437.9	193.3	147.6	104.0	73.3	52.0	40.1	35.2
35,0°	419.2	422.4	422.5	435.6	445.7	448.7	186.7	143.1	99.2	66.6	45.2	35.4	29.5
37,5°	415.6	427.1	432.3	432.2	436.8	440.0	190.5	143.1	98.0	62.3	42.1	34.5	27.7
40,0°	400.5	406.3	413.2	412.8	409.8	408.8	203.0	153.5	96.5	55.6	37.1	30.1	23.0
42,5°	402.4	406.8	400.1	383.3	377.8	385.5	209.2	149.2	86.1	47.7	31.6	22.6	19.0
45,0°	383.4	377.9	365.8	363.7	358.0	348.1	205.7	134.1	71.5	41.1	30.5	22.9	20.5
47,5°	353.3	337.4	324.0	320.1	311.0	304.5	216.3	128.3	59.8	39.0	26.5	22.6	19.1
50,0°	320.4	304.1	287.9	281.2	270.4	271.6	232.3	136.7	54.2	32.9	22.4	18.1	14.6
52,5°	296.6	272.2	245.6	233.2	223.2	221.0	232.0	130.6	47.1	26.1	16.7	13.2	11.8
55,0°	263.0	239.0	214.4	195.3	190.2	195.0	233.6	129.2	49.6	25.2	16.6	12.9	10.2
57,5°	227.9	202.7	178.8	161.7	157.9	162.8	233.0	141.0	52.2	21.8	12.8	11.9	9.9
60,0°	196.3	165.8	147.0	132.3	126.4	124.4	242.3	145.8	57.7	27.6	18.5	13.7	11.9
62,5°	173.7	133.9	112.3	100.0	91.8	90.8	260.8	149.2	55.4	27.0	17.3	12.9	11.5
65,0°	162.4	123.5	92.0	75.5	67.7	66.1	276.7	153.3	50.7	24.0	20.2	14.9	10.8
67,5°	147.6	109.8	75.5	60.0	56.1	54.1	300.7	161.7	45.3	26.5	24.0	17.0	11.5
70,0°	114.6	67.0	38.1	28.1	28.5	29.3	285.9	151.3	44.0	31.3	26.4	19.3	14.1
72,5°	41.7	14.3	7.3	4.1	3.4	3.6	262.8	140.2	44.5	34.2	29.4	22.5	18.5
75,0°	1.2	0.0	0.0	0.0	0.0	0.0	249.7	130.7	39.3	34.0	27.6	23.6	19.6
77,5°	0.0	0.0	0.0	0.0	0.0	0.0	174.3	91.4	26.0	27.2	24.0	19.1	12.8
80,0°	0.0	0.0	0.0	0.0	0.0	0.0	70.5	37.2	13.0	14.3	12.9	6.6	2.7
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	13.4	6.6	2.7	3.4	2.6	0.6	0.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family				Order number: 5XC1NC1F08CE								LP number			
Streetlight 11 micro LED				EAN: 4069025076458								59457_411			
Table of values for luminous intensities												Maximum luminous intensity		siteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone		
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm			
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	0.1	0.1		
2,5°	72.4	71.5	72.1	69.9	70.0	69.5	69.6	71.1	73.1	74.4	73.9	1.0	1.2		
5,0°	69.8	67.0	66.8	66.5	65.8	65.0	63.6	63.8	64.7	65.0	65.3	2.2	3.3		
7,5°	66.2	63.1	60.9	59.1	58.9	56.8	55.7	57.1	56.9	56.7	57.3	3.6	6.9		
10,0°	63.9	60.2	57.2	55.3	51.9	47.8	47.7	48.7	48.0	49.2	50.9	5.0	11.9		
12,5°	59.7	54.4	51.3	50.0	47.1	45.9	45.2	43.9	43.5	43.8	43.9	7.0	18.9		
15,0°	52.0	47.6	45.9	43.8	44.1	43.2	40.8	40.7	40.5	39.4	39.3	9.3	28.2		
17,5°	51.8	47.6	44.0	40.1	37.4	33.6	32.6	33.4	35.0	36.6	37.5	11.4	39.6		
20,0°	52.3	46.9	42.0	35.9	33.2	30.6	29.2	29.0	29.7	31.7	32.1	14.3	53.9		
22,5°	46.0	43.7	40.1	31.9	28.8	29.6	28.2	25.0	24.4	26.4	27.1	17.8	71.7		
25,0°	43.9	40.8	37.1	29.8	26.1	24.8	22.4	19.8	18.8	19.1	18.9	21.1	92.7		
27,5°	38.8	35.1	31.2	27.2	24.5	22.4	20.6	20.3	20.3	19.6	18.8	24.7	117.4		
30,0°	32.0	30.1	27.9	24.3	23.8	24.5	21.8	19.2	19.4	21.4	22.9	28.5	145.9		
32,5°	30.5	27.8	24.4	20.6	19.6	20.3	20.5	18.6	17.3	19.6	21.7	31.9	177.8		
35,0°	25.0	23.6	21.5	18.1	17.1	17.2	15.9	15.8	16.6	16.1	15.4	34.6	212.4		
37,5°	22.7	21.4	18.8	15.2	14.2	13.9	13.4	15.5	15.9	13.9	13.1	36.8	249.2		
40,0°	18.9	17.9	16.1	14.6	14.4	12.2	12.0	14.1	13.7	12.2	11.9	38.8	288.0		
42,5°	16.9	14.0	13.4	13.7	12.5	12.1	11.5	11.0	11.5	9.4	8.3	40.9	328.9		
45,0°	16.6	13.6	12.4	13.6	14.8	13.9	10.8	9.7	11.1	8.3	6.2	42.7	371.5		
47,5°	13.3	12.7	12.5	11.3	11.8	12.1	10.4	9.1	8.4	6.4	5.4	44.2	415.7		
50,0°	11.2	9.0	9.4	9.3	9.3	9.6	8.6	8.0	8.3	6.6	4.5	45.0	460.7		
52,5°	10.2	9.2	9.9	9.0	7.5	8.3	7.7	8.5	8.3	6.1	5.8	45.4	506.2		
55,0°	9.1	8.7	6.8	5.8	5.7	6.1	6.5	6.7	6.2	5.1	4.7	47.1	553.2		
57,5°	9.4	8.1	7.1	6.0	4.8	4.7	4.6	5.0	5.2	4.2	2.8	49.2	602.4		
60,0°	10.5	7.0	5.8	5.7	5.0	4.9	3.8	4.1	4.0	3.1	2.7	52.7	655.1		
62,5°	10.0	6.9	5.5	5.6	4.5	4.2	3.7	2.7	2.1	2.2	2.4	53.3	708.4		
65,0°	10.1	7.2	6.2	5.5	3.3	3.6	3.8	2.5	1.6	1.3	1.3	54.2	762.6		
67,5°	8.5	7.8	6.4	4.1	2.3	2.2	2.3	2.1	1.3	1.0	1.1	55.5	818.1		
70,0°	9.4	7.8	5.7	3.1	2.3	1.5	1.2	1.4	0.9	0.6	0.8	54.6	872.7		
72,5°	13.7	8.3	4.8	2.2	1.1	0.4	0.3	0.5	0.4	0.0	0.0	49.9	922.6		
75,0°	13.4	5.5	1.9	0.6	0.1	0.0	0.0	0.0	0.0	0.0	0.0	41.2	963.8		
77,5°	6.3	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	24.9	988.7		
80,0°	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	9.5	998.3		
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.7	1000.0		
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1NC1F08CE EAN: 4069025076458	LP number 59457_411
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	1280	14.0	14.2	14.1
95	241	252	1214	13.3	13.5	13.4
90	229	250	1154	12.6	12.8	12.7
85	216	248	1089	11.9	12.1	12.0
80	203	246	1023	11.2	11.4	11.3
75	190	243	957	10.6	10.7	10.6
70	178	241	897	10.0	10.1	10.0
65	165	238	831	9.3	9.4	9.4
60	152	235	766	8.6	8.7	8.6
55	140	232	706	8.0	8.1	8.0
50	127	229	640	7.4	7.5	7.4
45	114	225	574	6.9	7.0	7.0
40	102	221	514	6.3	6.4	6.4
35	89	216	449	5.7	5.7	5.7
30	76	210	383	5.0	5.1	5.0
25	63	203	317	4.4	4.5	4.4
21	53	197	267	3.9	4.0	4.0