

Photometric test report

Family
Highbay 11



Order number: 51HN11DB4VLA
EAN: 4069025302472

Version

Lamps

Controlgear

Rated values

primary light control with lens, PMMA, housing, white, for Licross® rail, narrow distribution

LED 4000 K | CRI ≥ 80


ECG-DALI

Net luminous flux = 56000 lm
Power consumption = 294.9 W
Luminous efficacy = 189.9 lm/W

LP number
59711_45

serial
documentation
29.01.2025

siteco

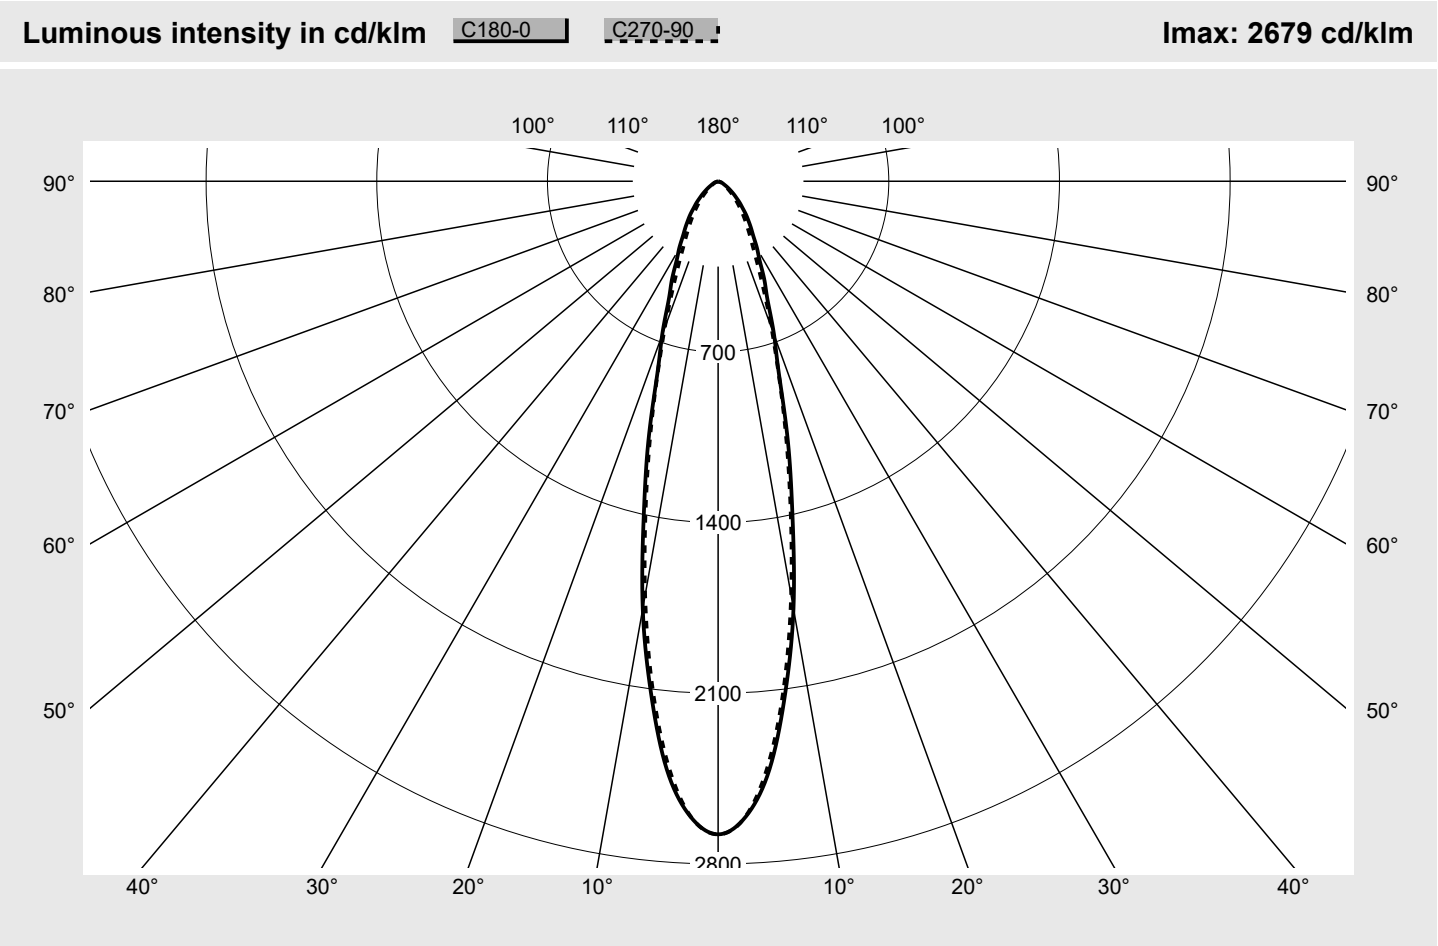

Classifications		Luminaire light output ratios	
DIN 5040	A 7 0	η_{LB}	100.0%
CIE	N1=85 N2=97 N3=100	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions	
DIN EN 13032 and DIN 5032	

Photometric test report

Family Highbay 11	Order number: 51HN11DB4VLA EAN: 4069025302472	LP number 59711_45
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	4.0	4.0
2,5°	2608.0	2619.4	2619.4	2616.5	2617.6	2616.2	2606.1	31.3	35.3
5,0°	2420.1	2415.7	2414.1	2408.4	2406.6	2402.3	2391.7	57.6	92.8
7,5°	2113.4	2116.1	2112.3	2103.0	2097.6	2090.5	2079.6	75.2	168.1
10,0°	1780.1	1768.7	1762.7	1751.6	1743.6	1735.2	1724.7	83.4	251.5
12,5°	1410.1	1409.3	1404.7	1395.9	1388.1	1380.5	1373.1	82.8	334.3
15,0°	1106.5	1097.8	1095.0	1089.4	1083.1	1078.4	1073.9	77.3	411.5
17,5°	830.1	840.2	835.5	831.1	826.6	824.9	824.1	68.5	480.0
20,0°	671.1	661.9	651.8	643.2	639.9	639.4	641.0	60.8	540.8
22,5°	531.9	530.5	514.2	498.9	497.0	496.6	496.8	53.4	594.2
25,0°	450.6	441.3	420.6	401.3	399.0	395.8	392.4	47.9	642.1
27,5°	370.8	368.7	351.4	331.7	326.8	321.1	316.0	43.1	685.2
30,0°	320.4	312.1	300.8	284.1	278.0	270.2	264.7	39.7	724.9
32,5°	271.0	266.8	259.0	245.6	238.0	229.0	224.7	36.5	761.4
35,0°	235.8	228.9	222.7	210.5	201.6	193.0	191.7	33.3	794.7
37,5°	204.4	197.8	191.5	181.1	172.0	164.3	162.4	30.3	825.0
40,0°	176.7	170.7	163.1	154.3	146.1	138.3	135.6	27.3	852.2
42,5°	147.6	145.5	138.6	130.6	123.2	115.8	113.3	24.2	876.4
45,0°	126.0	121.8	116.3	109.0	102.0	95.3	93.2	21.1	897.6
47,5°	103.2	101.5	97.1	90.9	84.6	78.4	76.7	18.3	915.9
50,0°	85.9	82.9	79.4	74.6	69.1	63.7	61.9	15.5	931.4
52,5°	69.0	67.2	64.5	61.0	56.2	51.6	49.7	13.0	944.4
55,0°	55.6	54.1	52.2	49.5	45.7	41.7	40.0	10.9	955.3
57,5°	43.6	43.1	41.8	39.8	37.0	33.6	32.2	9.0	964.3
60,0°	33.2	33.3	33.9	32.4	30.5	27.5	26.1	7.4	971.7
62,5°	25.9	26.0	27.0	26.2	25.1	22.4	21.3	6.1	977.8
65,0°	21.6	21.2	21.7	21.3	20.9	18.8	17.7	5.1	982.9
67,5°	17.0	17.1	17.8	17.0	17.3	15.6	14.8	4.3	987.2
70,0°	13.5	13.4	14.4	13.6	14.1	13.0	12.4	3.5	990.7
72,5°	11.0	10.8	10.9	10.9	11.0	10.7	10.6	2.8	993.5
75,0°	9.0	8.4	8.4	8.3	8.6	9.0	8.9	2.3	995.8
77,5°	6.6	6.4	6.2	6.2	6.6	7.3	7.4	1.8	997.5
80,0°	4.4	4.2	4.1	4.2	4.7	5.7	5.8	1.3	998.8
82,5°	2.0	2.1	2.2	2.4	3.0	3.9	4.1	0.8	999.6
85,0°	0.8	0.8	0.8	1.0	1.5	2.2	2.4	0.4	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Highbay 11			Order number: 51HN11DB4VLA EAN: 4069025302472							LP number 59711_45	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	21.1	22.2	21.4	22.5	22.9	19.9	21.1	20.2	21.4	21.7
	3H	21.3	22.3	21.7	22.7	23.0	20.2	21.2	20.5	21.5	21.9
	4H	21.4	22.3	21.8	22.7	23.0	20.3	21.2	20.7	21.6	22.0
	6H	21.4	22.3	21.8	22.6	23.0	20.4	21.3	20.9	21.7	22.1
	8H	21.5	22.2	21.9	22.6	23.0	20.6	21.3	21.0	21.7	22.1
	12H	21.4	22.1	21.9	22.5	22.9	20.6	21.2	21.0	21.6	22.1
4H	2H	21.1	22.1	21.5	22.4	22.8	20.1	21.0	20.5	21.4	21.7
	3H	21.4	22.2	21.9	22.6	23.0	20.5	21.2	20.9	21.6	22.1
	4H	21.6	22.2	22.0	22.7	23.1	20.7	21.4	21.1	21.8	22.2
	6H	21.6	22.2	22.1	22.6	23.1	20.9	21.4	21.3	21.9	22.4
	8H	21.6	22.1	22.1	22.6	23.1	20.9	21.5	21.4	21.9	22.4
	12H	21.6	22.0	22.1	22.5	23.0	21.0	21.4	21.5	21.9	22.4
8H	4H	21.5	22.1	22.0	22.5	23.0	20.7	21.2	21.2	21.6	22.1
	6H	21.6	22.0	22.1	22.5	23.0	20.9	21.3	21.4	21.8	22.3
	8H	21.6	22.0	22.1	22.5	23.0	21.0	21.4	21.5	21.9	22.4
	12H	21.6	21.9	22.1	22.4	22.9	21.1	21.4	21.6	21.9	22.4
12H	4H	21.5	22.0	22.0	22.4	22.9	20.7	21.1	21.2	21.6	22.1
	6H	21.6	22.0	22.1	22.4	23.0	20.9	21.2	21.4	21.7	22.3
	8H	21.6	21.9	22.1	22.4	22.9	21.0	21.3	21.5	21.8	22.4

Luminance table			Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 852 B = 264	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
γ	Luminance in cd/m²							
45,0°	44359.7	42878.8	40947.2	38386.1	35914.4	33564.8	32813.5	
50,0°	33255.1	32097.3	30737.8	28912.7	26744.9	24656.4	23958.5	
55,0°	24130.0	23476.8	22663.3	21486.1	19831.1	18101.3	17373.8	
60,0°	16555.9	16573.8	16882.1	16129.2	15170.2	13686.8	13003.6	
65,0°	12711.2	12496.8	12780.1	12573.4	12307.7	11060.5	10454.9	
70,0°	9848.2	9729.6	10452.4	9870.8	10243.5	9430.4	9012.6	
75,0°	8633.4	8102.4	8120.7	8011.0	8265.0	8618.0	8602.6	
80,0°	6298.5	6064.8	5866.9	5973.0	6674.1	8105.0	8269.9	
85,0°	2331.0	2302.4	2408.1	2722.3	4179.2	6153.1	6972.9	

Photometric test report

Family
Highbay 11

Order number: 51HN11DB4VLA
EAN: 4069025302472

LP number
59711_45

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

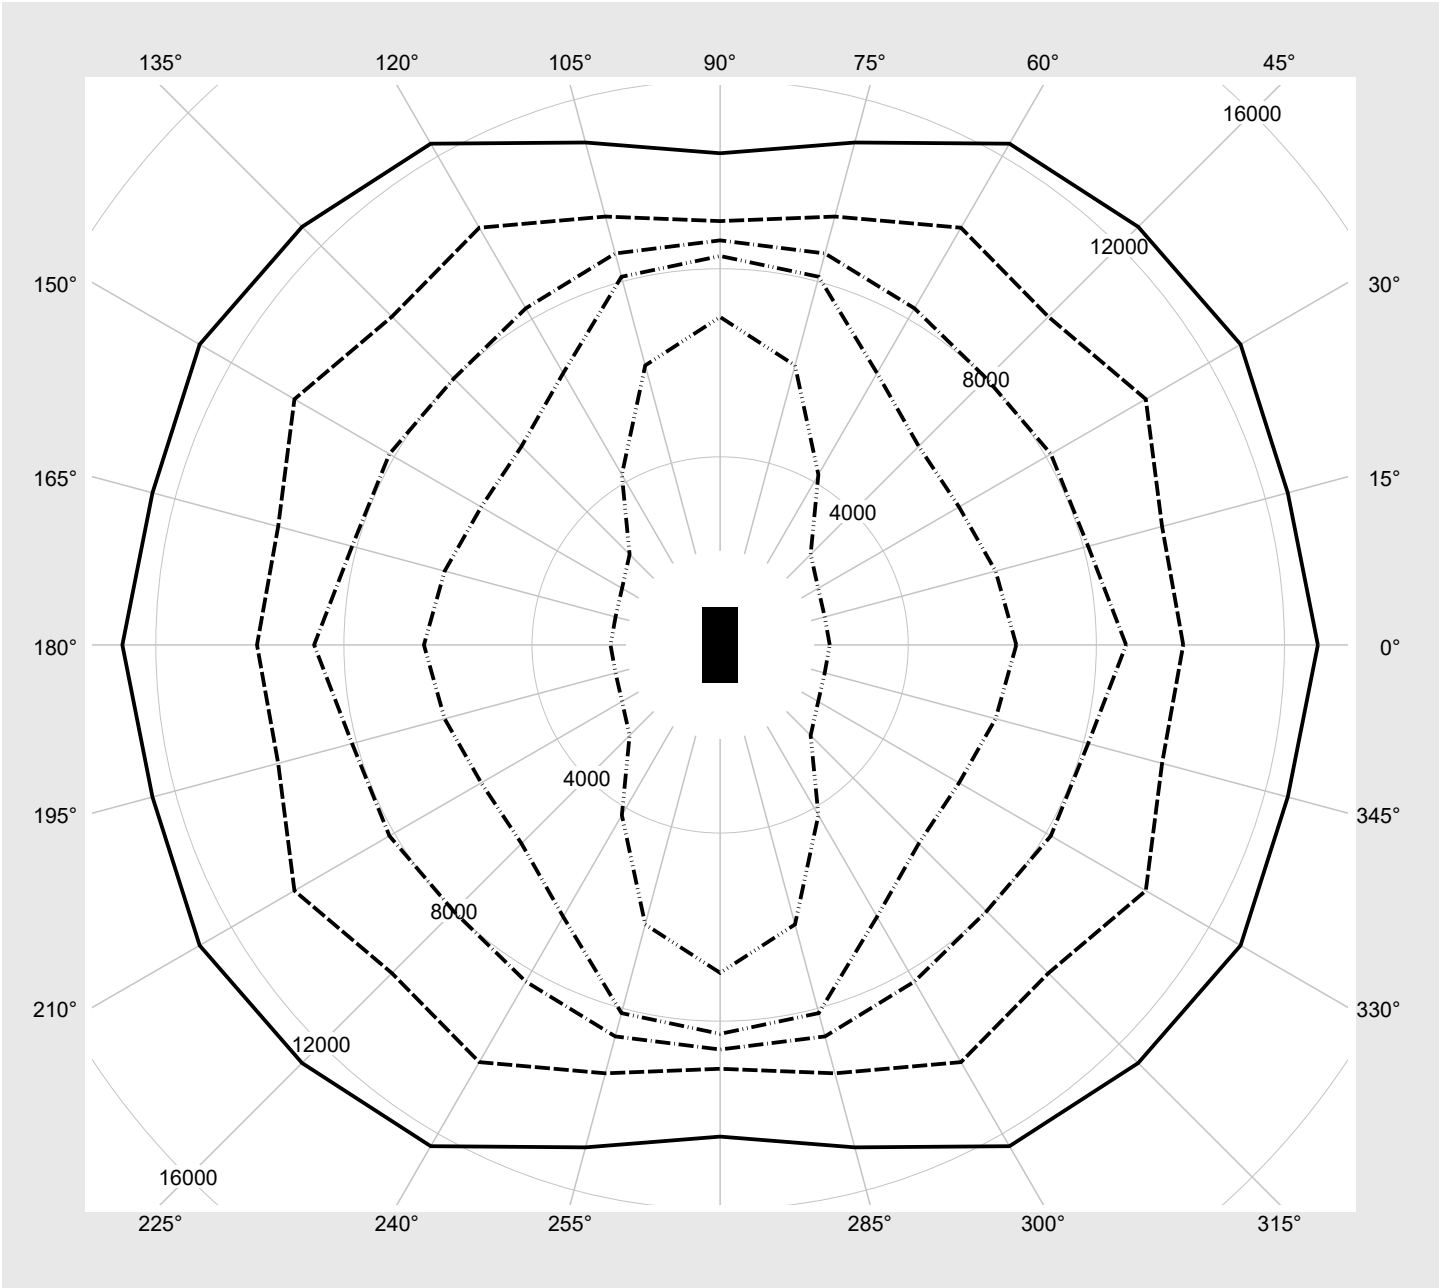

Photometric test report

Family Highbay 11	Order number: 51HN11DB4VLA EAN: 4069025302472	LP number 59711_45
Dimming levels table		environmental temperature: 25°C



Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	56000	294.9
95	240	252	53210	277.9
90	226	250	50330	261.0
85	213	248	47658	245.3
80	199	245	44755	228.3
75	186	243	42024	213.0
70	173	240	39281	197.6
65	160	237	36488	182.2
60	147	234	33675	167.1
55	134	231	30845	152.1
50	121	227	27992	137.1
45	108	223	25125	122.3
40	96	218	22443	108.5
35	83	213	19499	93.9
30	71	207	16763	80.6
25	59	201	13995	67.4
20	47	192	11182	54.2
15	35	181	8342	41.2
10	24	168	5708	29.3
5	12	142	2795	15.7
2	5	110	1082	7.9