


# Photometric test report

<b>Family</b> <b>Highbay 11</b>	<b>Order number: 51HN12DA4FDA01</b> <b>EAN: 4069025241160</b>	<b>LP number</b> <b>59710_47</b>
	<b>Version</b> primary light control with lens, PMMA, housing, white, wide distribution, with multisensor node BT	<b>serial documentation</b> <b>30.01.2025</b>
	<b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI <b>Rated values</b> Net luminous flux = 15000 lm Power consumption = 73.7 W Luminous efficacy = 203.5 lm/W	



Luminous intensity in cd/klm C180-0 C270-90 Imax: 772 cd/klm

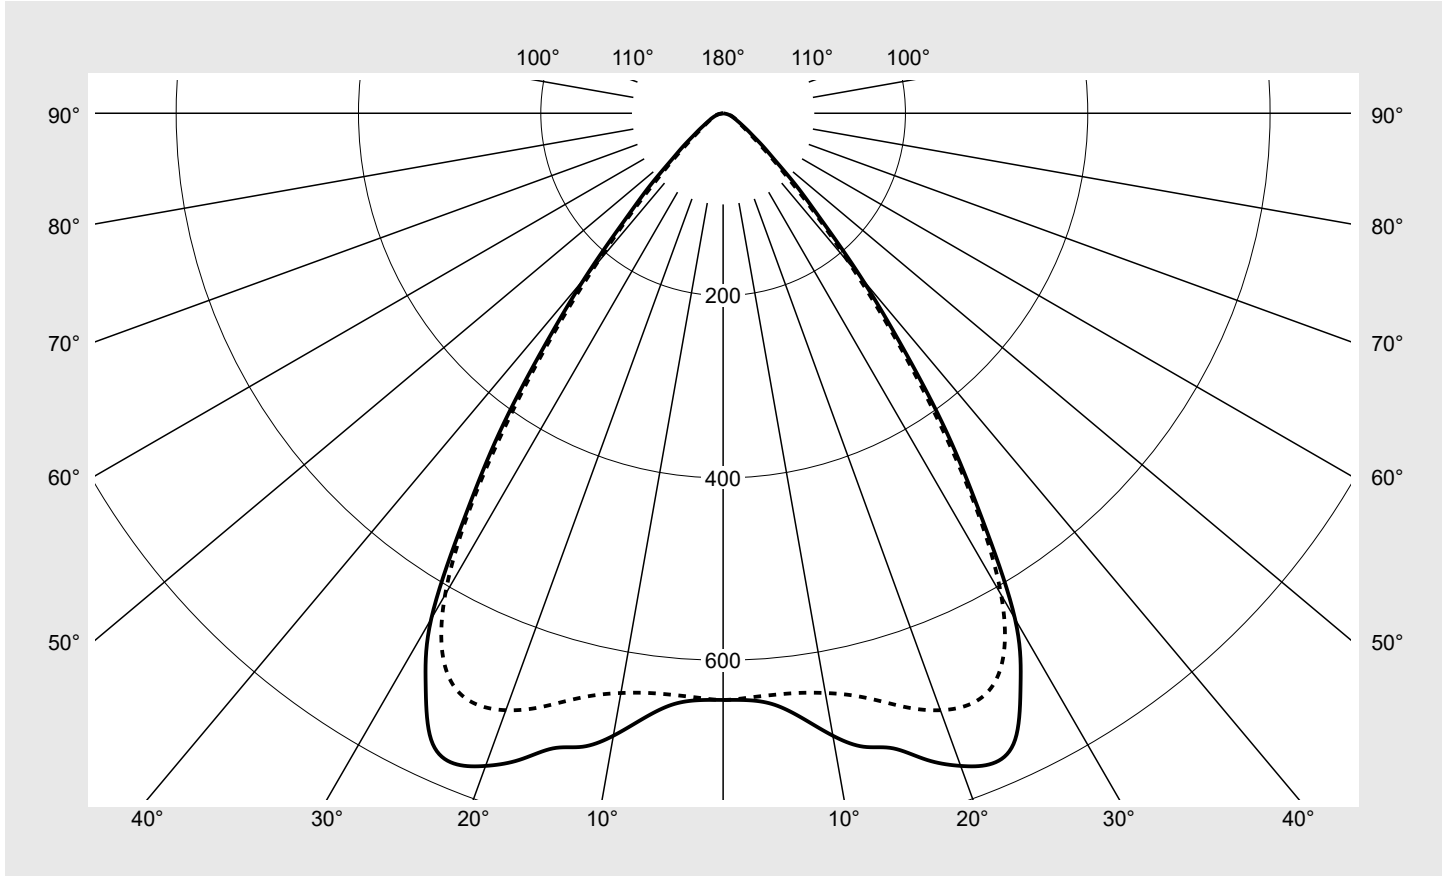

Classifications	
DIN 5040	A 6 0
CIE	N1=88 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

Family Highbay 11	Order number: 51HN12DA4FDA01 EAN: 4069025241160	LP number 59710_47
Table of values for luminous intensities		Maximum luminous intensity
		<b>siteco</b>

C-planes $\gamma$	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Total	
								Phi-zone	Phi-zone
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0,0°	643.6	643.6	643.6	643.6	643.6	643.6	643.6	1.0	1.0
2,5°	644.5	645.1	645.0	644.3	644.2	643.7	641.7	7.7	8.7
5,0°	651.5	652.3	650.7	647.5	645.3	643.2	640.4	15.5	24.1
7,5°	669.6	669.1	664.2	657.2	651.2	645.8	641.3	23.5	47.6
10,0°	693.4	691.0	681.5	670.0	659.9	651.2	645.8	31.9	79.6
12,5°	711.8	709.4	700.3	685.9	671.9	660.7	654.0	40.7	120.2
15,0°	721.3	721.7	717.1	704.9	689.4	675.9	667.7	49.7	169.9
17,5°	743.8	740.8	737.9	726.5	708.9	693.0	684.2	59.4	229.3
20,0°	761.9	761.9	759.6	745.2	724.0	705.6	696.8	69.2	298.5
22,5°	772.0	771.2	770.0	754.7	731.1	710.8	702.6	78.2	376.7
25,0°	758.1	756.6	756.3	743.6	722.7	703.3	695.6	85.1	461.8
27,5°	706.7	709.5	709.5	700.0	685.7	672.3	667.0	87.8	549.7
30,0°	640.4	635.6	633.7	626.6	621.7	614.1	609.9	85.8	635.5
32,5°	530.6	537.6	535.6	526.2	530.2	524.1	520.8	78.1	713.6
35,0°	428.2	426.4	425.9	411.9	420.8	414.2	411.4	66.0	779.6
37,5°	322.5	323.4	327.0	311.0	319.4	310.8	308.2	53.0	832.6
40,0°	236.1	234.0	241.6	230.8	230.9	219.8	218.4	40.7	873.3
42,5°	162.3	165.3	172.9	171.1	161.7	151.3	150.8	30.2	903.5
45,0°	117.3	114.9	119.4	122.5	109.3	102.6	102.3	21.9	925.4
47,5°	80.5	81.4	82.8	85.5	75.2	71.4	70.8	15.9	941.3
50,0°	59.4	58.0	58.0	59.0	52.9	50.5	49.6	11.7	953.0
52,5°	43.3	42.8	42.8	43.0	39.3	37.2	36.6	8.9	961.8
55,0°	33.3	32.4	32.9	33.7	30.5	28.7	28.3	7.1	968.9
57,5°	25.9	25.4	25.9	26.8	24.5	22.9	22.9	5.8	974.7
60,0°	20.9	20.2	21.2	21.8	20.4	18.9	19.2	4.9	979.5
62,5°	16.9	16.2	17.4	18.0	17.2	15.9	16.4	4.1	983.6
65,0°	14.9	13.6	14.4	15.1	14.8	13.6	14.4	3.6	987.2
67,5°	12.3	11.4	12.5	12.4	13.0	11.7	12.6	3.1	990.3
70,0°	10.4	9.5	10.5	10.1	11.1	10.1	11.0	2.7	993.0
72,5°	8.2	7.7	7.9	8.2	8.7	8.6	9.5	2.2	995.2
75,0°	6.5	6.0	6.0	6.4	6.6	7.1	7.9	1.7	996.9
77,5°	4.5	4.3	4.4	4.7	5.1	5.6	6.3	1.3	998.2
80,0°	2.9	2.7	2.9	3.1	3.5	4.1	4.7	0.9	999.1
82,5°	1.3	1.4	1.6	1.8	2.2	2.7	3.3	0.5	999.7
85,0°	0.6	0.6	0.6	0.7	1.0	1.4	1.8	0.3	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

Family Highbay 11	Order number: 51HN12DA4FDA01 EAN: 4069025241160	LP number 59710_47
----------------------	--	-----------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.9	21.2	20.3	21.5	21.8	19.6	20.9	20.0	21.2	21.5
	3H	19.9	21.1	20.3	21.4	21.7	19.6	20.8	20.0	21.1	21.5
	4H	19.9	21.0	20.3	21.3	21.7	19.7	20.7	20.1	21.1	21.4
	6H	19.9	20.8	20.3	21.2	21.6	19.7	20.6	20.1	21.0	21.4
	8H	20.0	20.8	20.4	21.1	21.5	19.8	20.6	20.2	21.0	21.4
	12H	19.9	20.7	20.4	21.1	21.5	19.8	20.5	20.2	20.9	21.3
4H	2H	19.8	20.9	20.2	21.2	21.6	19.5	20.6	19.9	20.9	21.3
	3H	19.9	20.7	20.3	21.1	21.5	19.6	20.5	20.0	20.9	21.3
	4H	19.9	20.6	20.3	21.0	21.5	19.6	20.4	20.1	20.8	21.3
	6H	19.8	20.5	20.3	20.9	21.4	19.7	20.3	20.2	20.8	21.2
	8H	19.8	20.4	20.3	20.8	21.3	19.7	20.3	20.2	20.7	21.2
	12H	19.8	20.3	20.3	20.7	21.2	19.7	20.2	20.2	20.7	21.2
8H	4H	19.8	20.4	20.3	20.8	21.3	19.6	20.2	20.1	20.6	21.1
	6H	19.8	20.2	20.3	20.7	21.2	19.6	20.1	20.1	20.6	21.1
	8H	19.7	20.1	20.2	20.6	21.2	19.6	20.1	20.2	20.6	21.1
	12H	19.7	20.0	20.2	20.5	21.1	19.7	20.0	20.2	20.5	21.1
12H	4H	19.8	20.3	20.3	20.7	21.2	19.6	20.1	20.1	20.5	21.0
	6H	19.8	20.1	20.3	20.6	21.2	19.6	20.0	20.2	20.5	21.0
	8H	19.7	20.0	20.3	20.6	21.1	19.7	20.0	20.2	20.5	21.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 426 B = 264
-----------------	---------------------------------	-------------------------------	--------------------

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45,0°		22130.1	21669.3	22524.9	23102.3	20610.4	19351.1	19294.2	
50,0°		12330.0	12038.5	12025.9	12240.6	10984.0	10473.0	10293.3	
55,0°		7748.7	7541.5	7649.2	7824.8	7098.1	6672.3	6592.1	
60,0°		5573.3	5380.1	5653.0	5822.7	5451.6	5048.5	5112.8	
65,0°		4702.7	4277.9	4559.7	4756.3	4657.5	4307.2	4550.6	
70,0°		4042.0	3687.9	4079.4	3946.8	4329.8	3941.4	4304.4	
75,0°		3331.1	3085.3	3077.0	3290.9	3419.2	3659.8	4079.8	
80,0°		2248.9	2098.4	2220.5	2398.7	2707.5	3184.5	3630.0	
85,0°		898.3	893.7	922.8	1080.4	1597.7	2128.7	2757.6	


**Photometric test report**

<b>Family</b> Highbay 11	<b>Order number: 51HN12DA4FDA01</b> <b>EAN: 4069025241160</b>	<b>LP number</b> 59710_47
-----------------------------	--	------------------------------

**Luminance values in cd/m<sup>2</sup>**

$\gamma$  65°    
   $\gamma$  70°    
   $\gamma$  75°    
   $\gamma$  80°    
   $\gamma$  85°

**siteco**

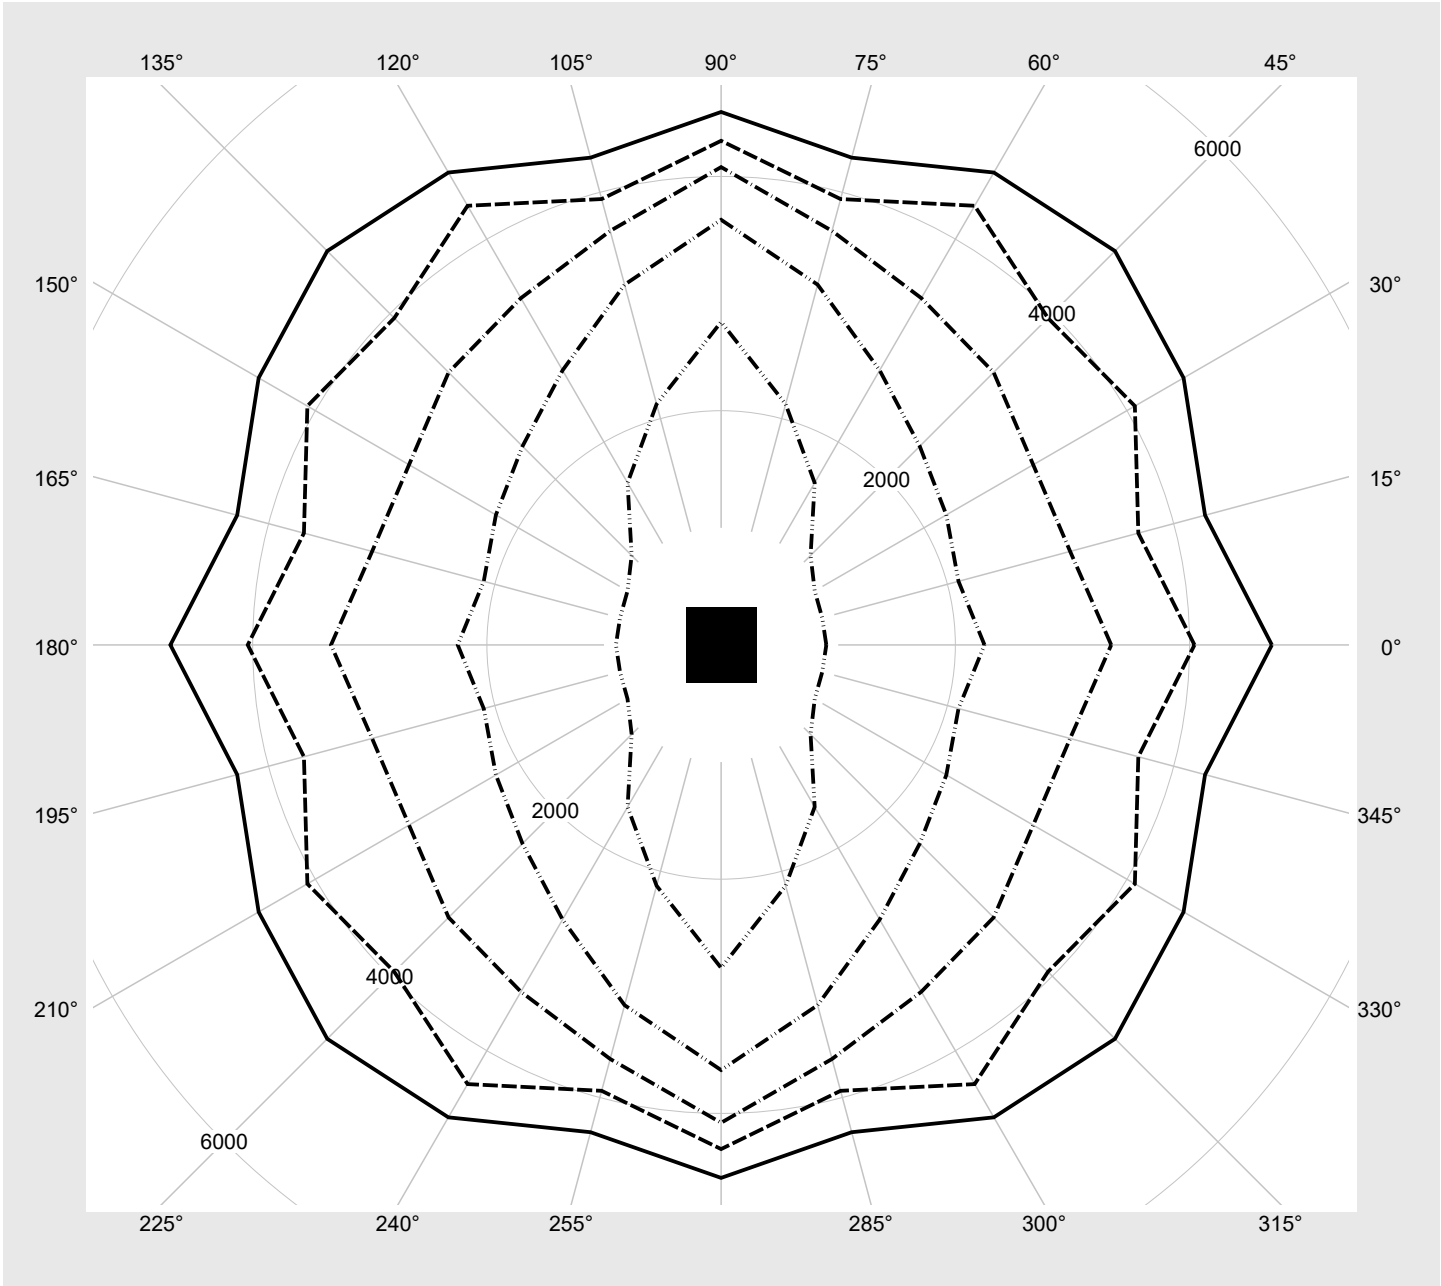

## Photometric test report

Family Highbay 11	Order number: 51HN12DA4FDA01 EAN: 4069025241160	LP number 59710_47
----------------------	--	-----------------------

Dimming levels table	environmental temperature: 25°C	<b>sITeco</b>
----------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	241	252	14266	69.9
90	227	250	13473	65.8
85	214	248	12736	62.0
80	201	245	11990	58.3
75	188	243	11246	54.4
70	175	240	10495	50.7
65	162	238	9737	46.9
60	149	234	8979	43.2
55	137	231	8274	39.8
50	124	228	7504	36.1
45	111	224	6733	32.4
40	99	219	6018	29.1
35	86	214	5233	25.4
30	74	209	4509	22.2
25	62	202	3779	18.8
20	49	194	2979	15.3
15	37	183	2239	12.1
10	25	169	1496	8.7
5	13	145	743	5.2
2	5	110	241	3.0