
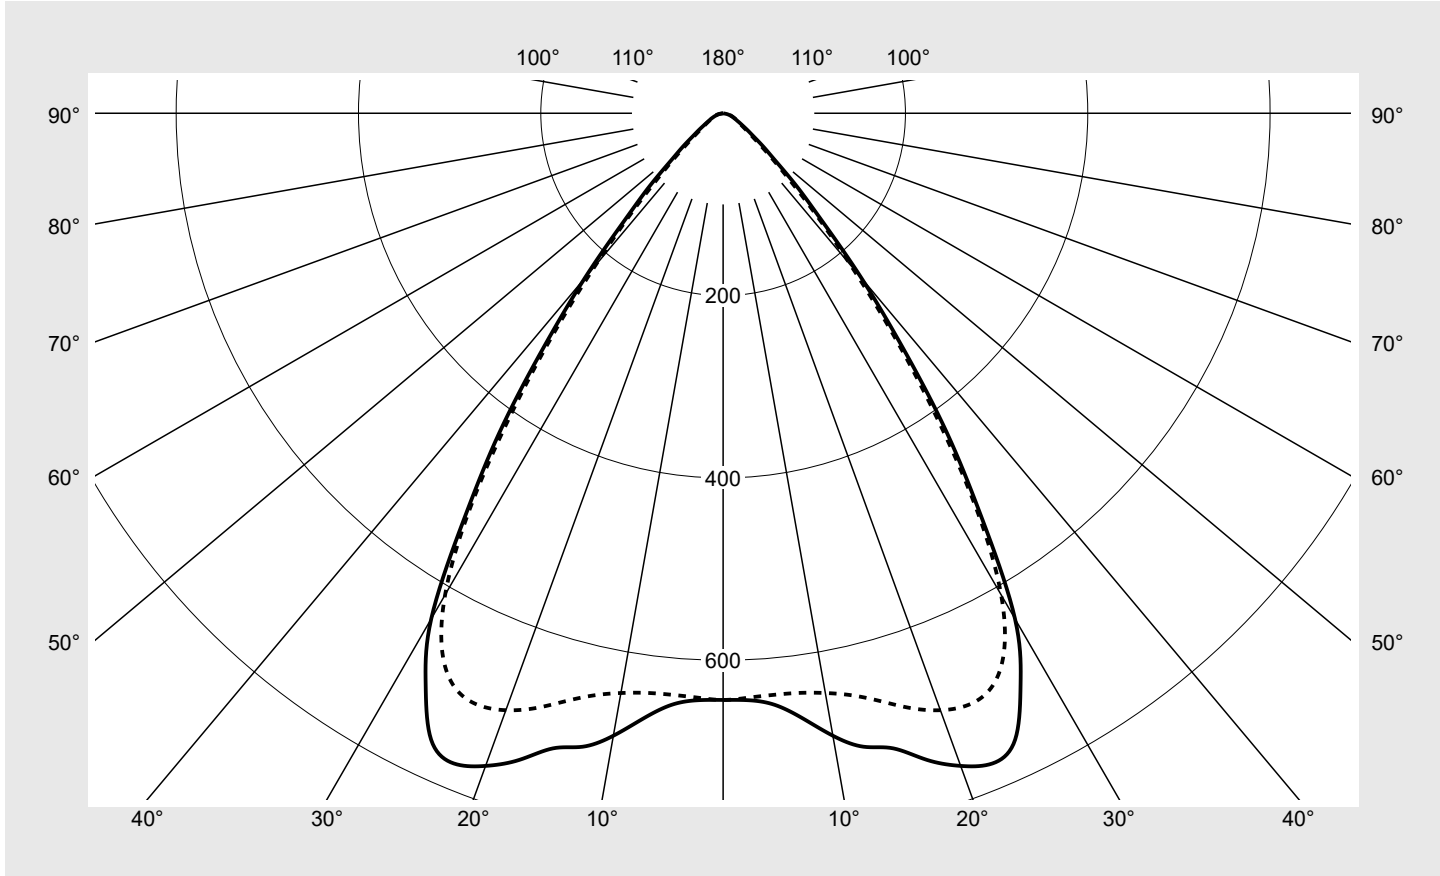


# Photometric test report

<b>Family</b> <b>Highbay 11</b>	<b>Order number: 51HN12DA4MDA02</b> <b>EAN: 4069025241245</b>	<b>LP number</b> <b>59710_58</b>
	<b>Version</b> primary light control with lens, PMMA, housing, white, wide distribution, with Node BT	<b>serial documentation</b> <b>30.01.2025</b>
	<b>Lamps</b> LED 4000 K   CRI ≥ 80	
<b>Controlgear</b> ECG-DALI		
<b>Rated values</b>		
Net luminous flux = 28000 lm		
Power consumption = 147.1 W		
Luminous efficacy = 190.3 lm/W		



**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 772 cd/klm**



Classifications	
DIN 5040	A 6 0
CIE	N1=88 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

**Measurement conditions**  
 DIN EN 13032 and DIN 5032

## Photometric test report

Family Highbay 11	Order number: 51HN12DA4MDA02 EAN: 4069025241245	LP number 59710_58
Table of values for luminous intensities		Maximum luminous intensity
		<b>siteco</b>

C-planes $\gamma$	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Total	
								Phi-zone	Phi-zone
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0,0°	643.6	643.6	643.6	643.6	643.6	643.6	643.6	1.0	1.0
2,5°	644.5	645.1	645.0	644.3	644.2	643.7	641.7	7.7	8.7
5,0°	651.5	652.3	650.7	647.5	645.3	643.2	640.4	15.5	24.1
7,5°	669.6	669.1	664.2	657.2	651.2	645.8	641.3	23.5	47.6
10,0°	693.4	691.0	681.5	670.0	659.9	651.2	645.8	31.9	79.6
12,5°	711.8	709.4	700.3	685.9	671.9	660.7	654.0	40.7	120.2
15,0°	721.3	721.7	717.1	704.9	689.4	675.9	667.7	49.7	169.9
17,5°	743.8	740.8	737.9	726.5	708.9	693.0	684.2	59.4	229.3
20,0°	761.9	761.9	759.6	745.2	724.0	705.6	696.8	69.2	298.5
22,5°	772.0	771.2	770.0	754.7	731.1	710.8	702.6	78.2	376.7
25,0°	758.1	756.6	756.3	743.6	722.7	703.3	695.6	85.1	461.8
27,5°	706.7	709.5	709.5	700.0	685.7	672.3	667.0	87.8	549.7
30,0°	640.4	635.6	633.7	626.6	621.7	614.1	609.9	85.8	635.5
32,5°	530.6	537.6	535.6	526.2	530.2	524.1	520.8	78.1	713.6
35,0°	428.2	426.4	425.9	411.9	420.8	414.2	411.4	66.0	779.6
37,5°	322.5	323.4	327.0	311.0	319.4	310.8	308.2	53.0	832.6
40,0°	236.1	234.0	241.6	230.8	230.9	219.8	218.4	40.7	873.3
42,5°	162.3	165.3	172.9	171.1	161.7	151.3	150.8	30.2	903.5
45,0°	117.3	114.9	119.4	122.5	109.3	102.6	102.3	21.9	925.4
47,5°	80.5	81.4	82.8	85.5	75.2	71.4	70.8	15.9	941.3
50,0°	59.4	58.0	58.0	59.0	52.9	50.5	49.6	11.7	953.0
52,5°	43.3	42.8	42.8	43.0	39.3	37.2	36.6	8.9	961.8
55,0°	33.3	32.4	32.9	33.7	30.5	28.7	28.3	7.1	968.9
57,5°	25.9	25.4	25.9	26.8	24.5	22.9	22.9	5.8	974.7
60,0°	20.9	20.2	21.2	21.8	20.4	18.9	19.2	4.9	979.5
62,5°	16.9	16.2	17.4	18.0	17.2	15.9	16.4	4.1	983.6
65,0°	14.9	13.6	14.4	15.1	14.8	13.6	14.4	3.6	987.2
67,5°	12.3	11.4	12.5	12.4	13.0	11.7	12.6	3.1	990.3
70,0°	10.4	9.5	10.5	10.1	11.1	10.1	11.0	2.7	993.0
72,5°	8.2	7.7	7.9	8.2	8.7	8.6	9.5	2.2	995.2
75,0°	6.5	6.0	6.0	6.4	6.6	7.1	7.9	1.7	996.9
77,5°	4.5	4.3	4.4	4.7	5.1	5.6	6.3	1.3	998.2
80,0°	2.9	2.7	2.9	3.1	3.5	4.1	4.7	0.9	999.1
82,5°	1.3	1.4	1.6	1.8	2.2	2.7	3.3	0.5	999.7
85,0°	0.6	0.6	0.6	0.7	1.0	1.4	1.8	0.3	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

Family Highbay 11	Order number: 51HN12DA4MDA02 EAN: 4069025241245	LP number 59710_58
----------------------	--	-----------------------

UGR-Table	Standard room	siteco	
-----------	---------------	--------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	22.1	23.4	22.5	23.7	24.0	21.8	23.1	22.2	23.4	23.7
	3H	22.1	23.2	22.5	23.6	23.9	21.8	22.9	22.2	23.3	23.6
	4H	22.1	23.1	22.5	23.5	23.9	21.8	22.9	22.2	23.2	23.6
	6H	22.1	23.0	22.5	23.4	23.8	21.9	22.8	22.3	23.2	23.6
	8H	22.1	22.9	22.6	23.3	23.7	22.0	22.8	22.4	23.1	23.5
	12H	22.1	22.8	22.5	23.2	23.6	21.9	22.7	22.4	23.1	23.5
4H	2H	22.0	23.0	22.4	23.4	23.8	21.7	22.7	22.1	23.1	23.5
	3H	22.0	22.9	22.4	23.3	23.7	21.8	22.6	22.2	23.0	23.4
	4H	22.0	22.8	22.5	23.2	23.6	21.8	22.6	22.3	23.0	23.4
	6H	22.0	22.6	22.5	23.1	23.6	21.9	22.5	22.3	22.9	23.4
	8H	22.0	22.6	22.5	23.0	23.5	21.9	22.5	22.3	22.9	23.4
	12H	22.0	22.5	22.5	22.9	23.4	21.9	22.4	22.4	22.8	23.3
8H	4H	22.0	22.5	22.4	23.0	23.5	21.8	22.3	22.2	22.8	23.3
	6H	21.9	22.4	22.4	22.9	23.4	21.8	22.3	22.3	22.8	23.3
	8H	21.9	22.3	22.4	22.8	23.3	21.8	22.2	22.3	22.7	23.3
	12H	21.9	22.2	22.4	22.7	23.3	21.9	22.2	22.4	22.7	23.2
12H	4H	22.0	22.4	22.5	22.9	23.4	21.8	22.2	22.3	22.7	23.2
	6H	21.9	22.3	22.4	22.8	23.3	21.8	22.2	22.3	22.7	23.2
	8H	21.9	22.2	22.4	22.7	23.3	21.8	22.1	22.3	22.6	23.2

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 426 B = 264
-----------------	---------------------------------	-------------------------------	--------------------

C-planes	$\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°
			165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°	
Luminance in cd/m²								
45,0°		41309.5	40449.3	42046.4	43124.2	38472.7	36122.1	36015.8
50,0°		23016.1	22471.9	22448.3	22849.2	20503.5	19549.5	19214.1
55,0°		14464.3	14077.5	14278.5	14606.2	13249.8	12455.0	12305.3
60,0°		10403.4	10042.9	10552.3	10869.0	10176.3	9424.0	9544.0
65,0°		8778.3	7985.4	8511.5	8878.5	8694.1	8040.2	8494.4
70,0°		7545.1	6884.1	7614.9	7367.4	8082.3	7357.2	8035.0
75,0°		6218.0	5759.1	5743.7	6143.0	6382.5	6831.7	7615.7
80,0°		4198.0	3917.0	4145.0	4477.6	5054.0	5944.3	6775.9
85,0°		1676.8	1668.3	1722.5	2016.8	2982.3	3973.5	5147.6


**Photometric test report**

**Family**  
Highbay 11

**Order number: 51HN12DA4MDA02**  
**EAN: 4069025241245**

**LP number**  
59710\_58

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

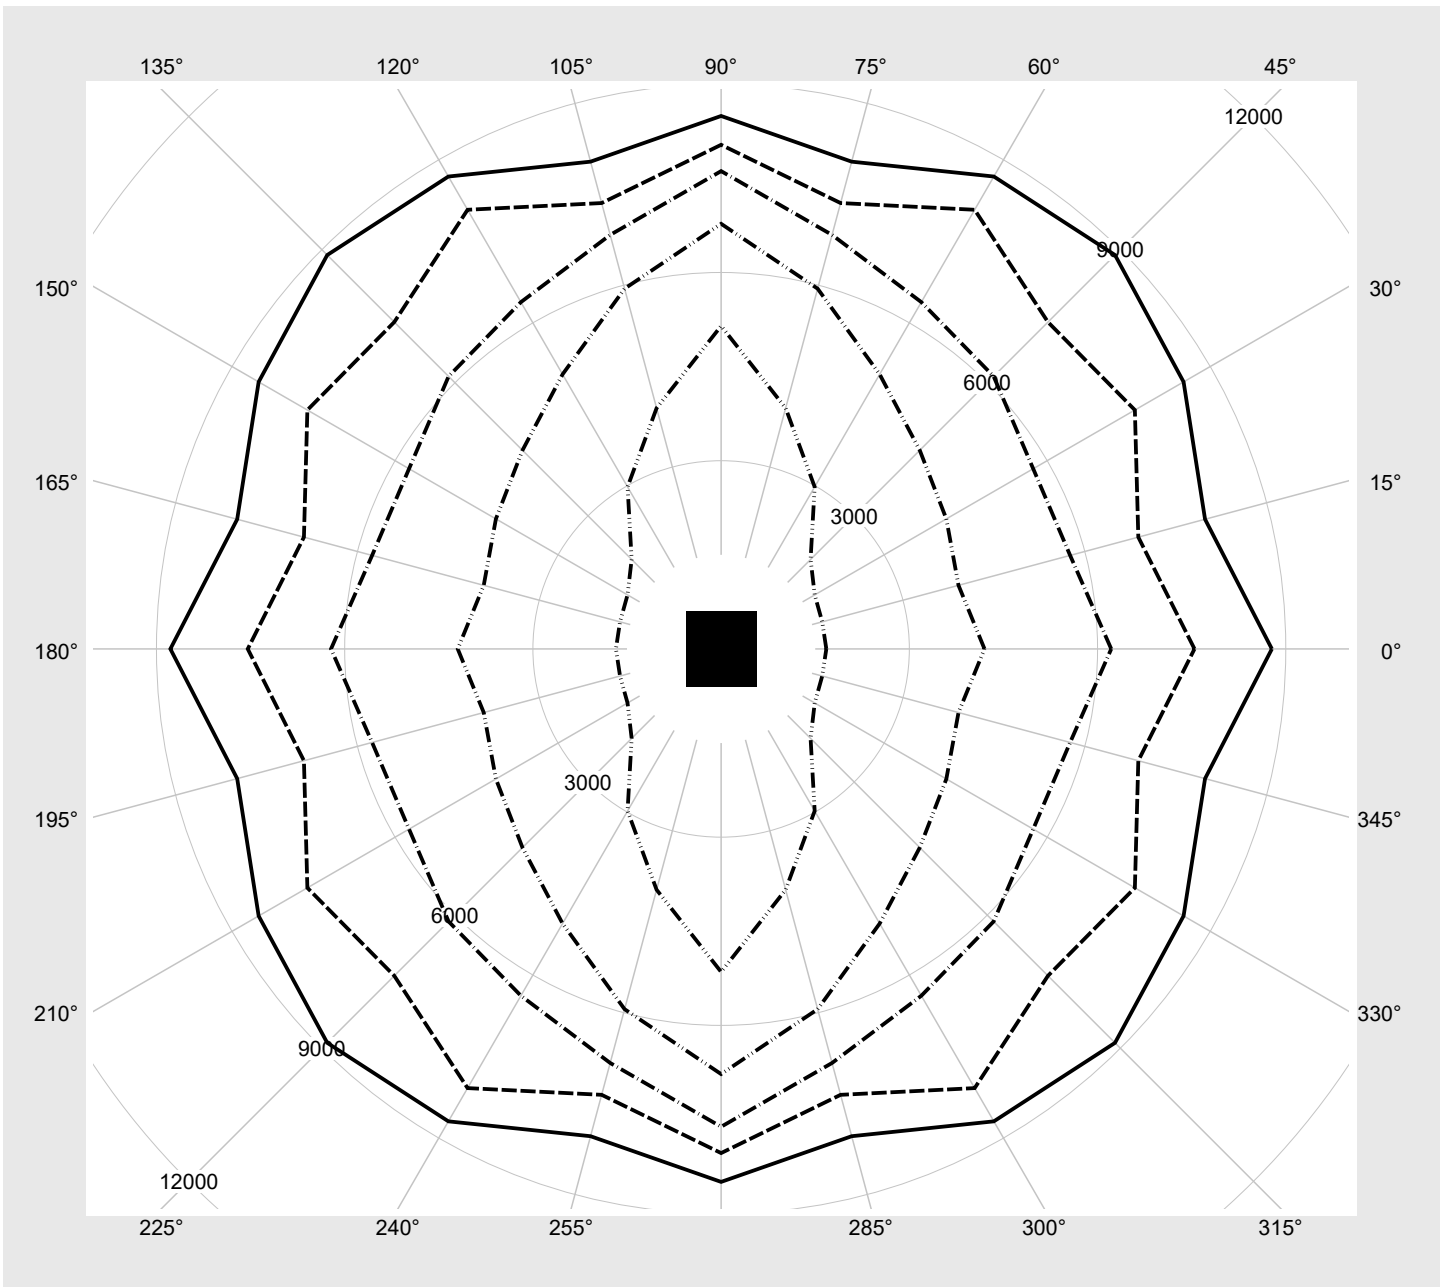

## Photometric test report

Family Highbay 11	Order number: 51HN12DA4MDA02 EAN: 4069025241245	LP number 59710_58
----------------------	--	-----------------------

Dimming levels table	environmental temperature: 25°C	sITeco
----------------------	---------------------------------	--------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	240	252	26584	138.7
90	227	250	25246	130.8
85	213	248	23796	122.4
80	200	245	22443	114.7
75	186	243	20975	106.4
70	173	240	19598	98.8
65	160	237	18213	91.2
60	147	234	16807	83.6
55	134	231	15399	76.2
50	121	227	13971	68.8
45	109	223	12641	62.0
40	96	218	11192	54.6
35	84	213	9836	47.8
30	71	207	8355	40.7
25	59	201	6969	34.0
20	47	192	5572	27.5
15	35	181	4154	21.1
10	24	168	2843	15.1
5	12	142	1395	8.3
2	5	110	539	4.4