

Photometric test report

Family
Highbay 11



Order number: 51HN11DB4QLA01
EAN: 4069025373977

Version

Lamps

Controlgear

Rated values

primary light control with lens, PMMA, housing, white, for Licross® rail, narrow distribution, with multisensor node BT

LED 4000 K | CRI ≥ 80


ECG-DALI

Net luminous flux = 36000 lm
Power consumption = 178.2 W
Luminous efficacy = 202 lm/W

LP number
59711_87

serial
documentation
31.01.2025

siteco

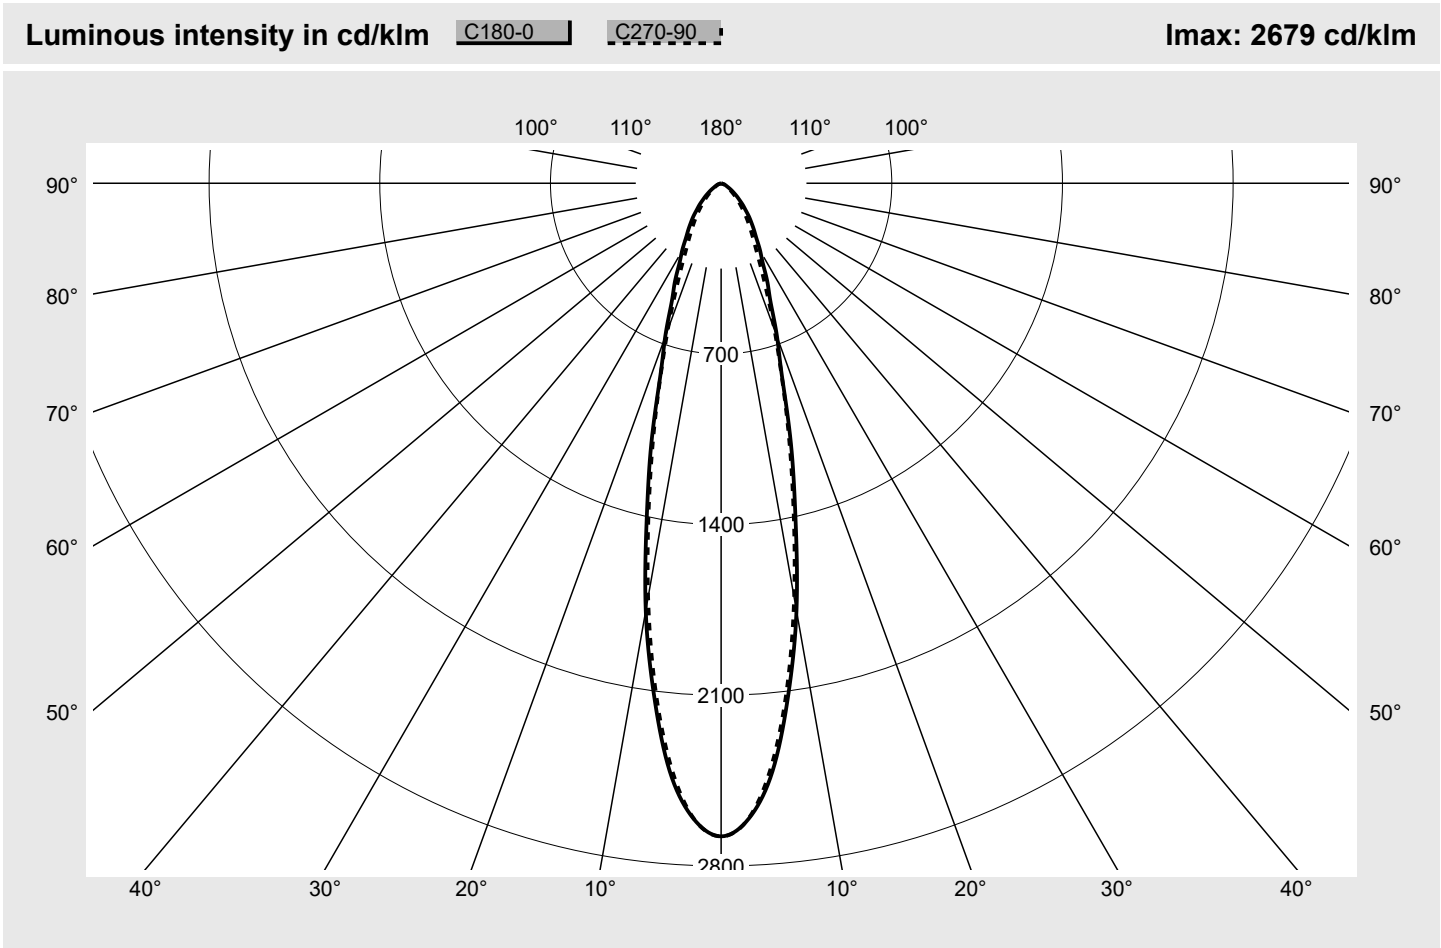

Classifications		Luminaire light output ratios	
DIN 5040	A 7 0	η_{LB}	100.0%
CIE	N1=85 N2=97 N3=100	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 11	Order number: 51HN11DB4QLA01 EAN: 4069025373977	LP number 59711_87
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	4.0	4.0
2,5°	2608.0	2619.4	2619.4	2616.5	2617.6	2616.2	2606.1	31.3	35.3
5,0°	2420.1	2415.7	2414.1	2408.4	2406.6	2402.3	2391.7	57.6	92.8
7,5°	2113.4	2116.1	2112.3	2103.0	2097.6	2090.5	2079.6	75.2	168.1
10,0°	1780.1	1768.7	1762.7	1751.6	1743.6	1735.2	1724.7	83.4	251.5
12,5°	1410.1	1409.3	1404.7	1395.9	1388.1	1380.5	1373.1	82.8	334.3
15,0°	1106.5	1097.8	1095.0	1089.4	1083.1	1078.4	1073.9	77.3	411.5
17,5°	830.1	840.2	835.5	831.1	826.6	824.9	824.1	68.5	480.0
20,0°	671.1	661.9	651.8	643.2	639.9	639.4	641.0	60.8	540.8
22,5°	531.9	530.5	514.2	498.9	497.0	496.6	496.8	53.4	594.2
25,0°	450.6	441.3	420.6	401.3	399.0	395.8	392.4	47.9	642.1
27,5°	370.8	368.7	351.4	331.7	326.8	321.1	316.0	43.1	685.2
30,0°	320.4	312.1	300.8	284.1	278.0	270.2	264.7	39.7	724.9
32,5°	271.0	266.8	259.0	245.6	238.0	229.0	224.7	36.5	761.4
35,0°	235.8	228.9	222.7	210.5	201.6	193.0	191.7	33.3	794.7
37,5°	204.4	197.8	191.5	181.1	172.0	164.3	162.4	30.3	825.0
40,0°	176.7	170.7	163.1	154.3	146.1	138.3	135.6	27.3	852.2
42,5°	147.6	145.5	138.6	130.6	123.2	115.8	113.3	24.2	876.4
45,0°	126.0	121.8	116.3	109.0	102.0	95.3	93.2	21.1	897.6
47,5°	103.2	101.5	97.1	90.9	84.6	78.4	76.7	18.3	915.9
50,0°	85.9	82.9	79.4	74.6	69.1	63.7	61.9	15.5	931.4
52,5°	69.0	67.2	64.5	61.0	56.2	51.6	49.7	13.0	944.4
55,0°	55.6	54.1	52.2	49.5	45.7	41.7	40.0	10.9	955.3
57,5°	43.6	43.1	41.8	39.8	37.0	33.6	32.2	9.0	964.3
60,0°	33.2	33.3	33.9	32.4	30.5	27.5	26.1	7.4	971.7
62,5°	25.9	26.0	27.0	26.2	25.1	22.4	21.3	6.1	977.8
65,0°	21.6	21.2	21.7	21.3	20.9	18.8	17.7	5.1	982.9
67,5°	17.0	17.1	17.8	17.0	17.3	15.6	14.8	4.3	987.2
70,0°	13.5	13.4	14.4	13.6	14.1	13.0	12.4	3.5	990.7
72,5°	11.0	10.8	10.9	10.9	11.0	10.7	10.6	2.8	993.5
75,0°	9.0	8.4	8.4	8.3	8.6	9.0	8.9	2.3	995.8
77,5°	6.6	6.4	6.2	6.2	6.6	7.3	7.4	1.8	997.5
80,0°	4.4	4.2	4.1	4.2	4.7	5.7	5.8	1.3	998.8
82,5°	2.0	2.1	2.2	2.4	3.0	3.9	4.1	0.8	999.6
85,0°	0.8	0.8	0.8	1.0	1.5	2.2	2.4	0.4	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Highbay 11			Order number: 51HN11DB4QLA01 EAN: 4069025373977						LP number 59711_87		
UGR-Table			Standard room						siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	19.5	20.7	19.9	21.0	21.3	18.3	19.5	18.7	19.8	20.1
	3H	19.8	20.8	20.1	21.1	21.5	18.6	19.7	19.0	20.0	20.4
	4H	19.8	20.8	20.2	21.1	21.5	18.8	19.7	19.2	20.1	20.4
	6H	19.9	20.7	20.3	21.1	21.5	18.9	19.7	19.3	20.1	20.5
	8H	20.0	20.7	20.4	21.0	21.5	19.0	19.7	19.4	20.1	20.5
	12H	19.9	20.6	20.3	21.0	21.4	19.0	19.7	19.5	20.1	20.5
4H	2H	19.6	20.5	20.0	20.9	21.3	18.5	19.5	18.9	19.8	20.2
	3H	19.9	20.7	20.3	21.1	21.5	18.9	19.7	19.4	20.1	20.5
	4H	20.0	20.7	20.5	21.1	21.6	19.1	19.8	19.6	20.2	20.7
	6H	20.1	20.7	20.6	21.1	21.6	19.3	19.9	19.8	20.3	20.8
	8H	20.1	20.6	20.6	21.1	21.5	19.4	19.9	19.9	20.4	20.9
	12H	20.1	20.5	20.6	21.0	21.5	19.5	19.9	20.0	20.4	20.9
8H	4H	20.0	20.5	20.5	21.0	21.5	19.2	19.7	19.6	20.1	20.6
	6H	20.1	20.5	20.6	21.0	21.5	19.4	19.8	19.9	20.3	20.8
	8H	20.1	20.4	20.6	20.9	21.5	19.5	19.8	20.0	20.3	20.9
	12H	20.0	20.3	20.6	20.9	21.4	19.6	19.9	20.1	20.4	20.9
12H	4H	20.0	20.4	20.5	20.9	21.4	19.1	19.6	19.6	20.0	20.5
	6H	20.1	20.4	20.6	20.9	21.4	19.4	19.7	19.9	20.2	20.7
	8H	20.1	20.4	20.6	20.9	21.4	19.5	19.8	20.0	20.3	20.8

Luminance table			Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 852 B = 264	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
γ	Luminance in cd/m²							
45,0°	28517.0	27564.9	26323.2	24676.8	23087.8	21577.4	21094.4	
50,0°	21378.3	20634.0	19760.0	18586.8	17193.1	15850.6	15401.9	
55,0°	15512.2	15092.2	14569.3	13812.5	12748.5	11636.6	11168.9	
60,0°	10643.1	10654.6	10852.8	10368.8	9752.2	8798.7	8359.5	
65,0°	8171.5	8033.6	8215.8	8082.9	7912.1	7110.3	6721.0	
70,0°	6331.0	6254.7	6719.4	6345.5	6585.1	6062.4	5793.8	
75,0°	5550.1	5208.7	5220.5	5150.0	5313.2	5540.2	5530.3	
80,0°	4049.0	3898.8	3771.6	3839.8	4290.5	5210.4	5316.4	
85,0°	1498.5	1480.1	1548.1	1750.1	2686.6	3955.6	4482.6	

Photometric test report

Family
Highbay 11

Order number: 51HN11DB4QLA01
EAN: 4069025373977

LP number
59711_87

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

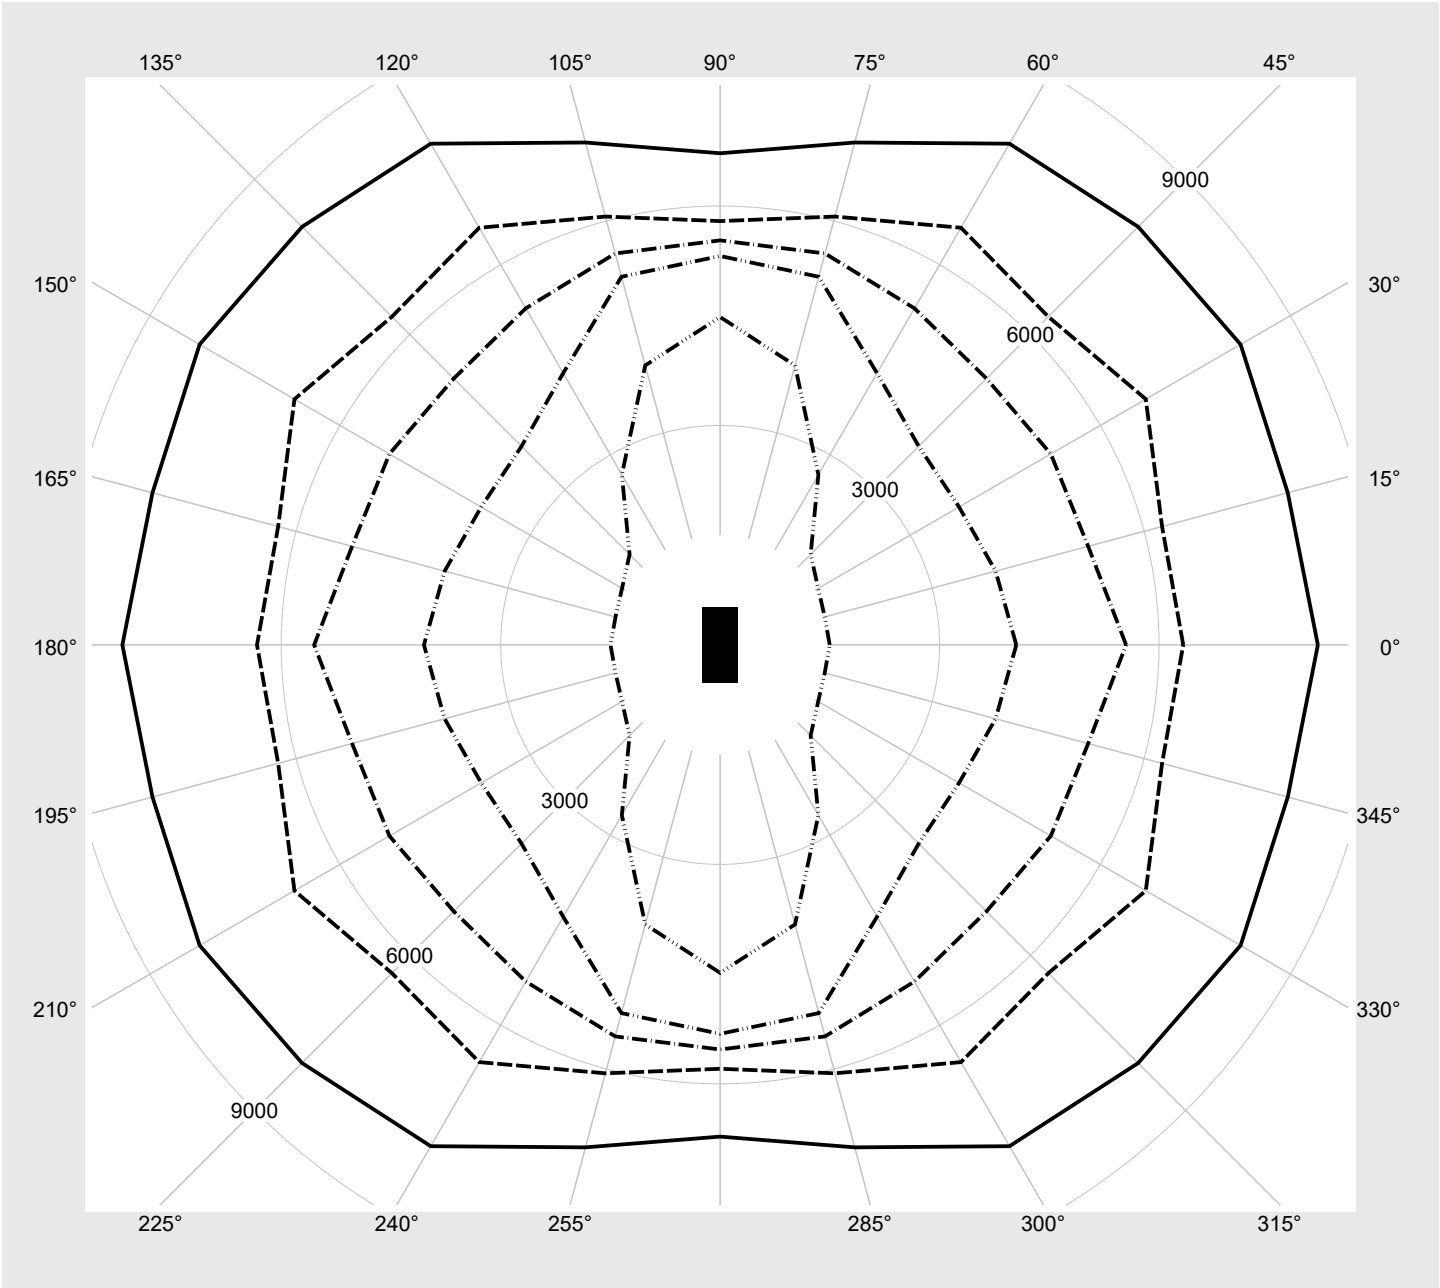

Photometric test report

Family Highbay 11	Order number: 51HN11DB4QLA01 EAN: 4069025373977	LP number 59711_87
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	36000	178.2
95	241	252	34258	168.8
90	227	250	32370	158.7
85	214	248	30612	149.5
80	201	245	28833	140.1
75	188	243	27050	131.0
70	175	240	25256	121.7
65	162	238	23457	112.7
60	149	234	21641	103.6
55	136	231	19822	94.6
50	123	227	17982	85.6
45	111	224	16268	77.4
40	98	219	14402	68.5
35	86	214	12670	60.4
30	73	208	10780	51.5
25	61	202	9014	43.5
20	49	194	7241	35.6
15	37	183	5454	27.7
10	25	169	3653	19.8
5	13	145	1834	11.6
1	4	102	463	5.3