

Photometric test report

Family
Highbay 11

Order number: 51HN12DB4MDA
EAN: 4069025358288

LP number
59710_136

serial
documentation
14.02.2025

siteco



Version primary light control with lens, PMMA, housing, white, wide distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Setting AC-mode
Rated values Net luminous flux = 30000 lm
Power consumption = 146.5 W
Luminous efficacy = 204.8 lm/W

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 772 cd/klm



Classifications

DIN 5040 A 6 0
CIE N1=88 N2=98 N3=100
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 11	Order number: 51HN12DB4MDA EAN: 4069025358288	LP number 59710_136
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	643.6	643.6	643.6	643.6	643.6	643.6	643.6	1.0	1.0
2,5°	644.5	645.1	645.0	644.3	644.2	643.7	641.7	7.7	8.7
5,0°	651.5	652.3	650.7	647.5	645.3	643.2	640.4	15.5	24.1
7,5°	669.6	669.1	664.2	657.2	651.2	645.8	641.3	23.5	47.6
10,0°	693.4	691.0	681.5	670.0	659.9	651.2	645.8	31.9	79.6
12,5°	711.8	709.4	700.3	685.9	671.9	660.7	654.0	40.7	120.2
15,0°	721.3	721.7	717.1	704.9	689.4	675.9	667.7	49.7	169.9
17,5°	743.8	740.8	737.9	726.5	708.9	693.0	684.2	59.4	229.3
20,0°	761.9	761.9	759.6	745.2	724.0	705.6	696.8	69.2	298.5
22,5°	772.0	771.2	770.0	754.7	731.1	710.8	702.6	78.2	376.7
25,0°	758.1	756.6	756.3	743.6	722.7	703.3	695.6	85.1	461.8
27,5°	706.7	709.5	709.5	700.0	685.7	672.3	667.0	87.8	549.7
30,0°	640.4	635.6	633.7	626.6	621.7	614.1	609.9	85.8	635.5
32,5°	530.6	537.6	535.6	526.2	530.2	524.1	520.8	78.1	713.6
35,0°	428.2	426.4	425.9	411.9	420.8	414.2	411.4	66.0	779.6
37,5°	322.5	323.4	327.0	311.0	319.4	310.8	308.2	53.0	832.6
40,0°	236.1	234.0	241.6	230.8	230.9	219.8	218.4	40.7	873.3
42,5°	162.3	165.3	172.9	171.1	161.7	151.3	150.8	30.2	903.5
45,0°	117.3	114.9	119.4	122.5	109.3	102.6	102.3	21.9	925.4
47,5°	80.5	81.4	82.8	85.5	75.2	71.4	70.8	15.9	941.3
50,0°	59.4	58.0	58.0	59.0	52.9	50.5	49.6	11.7	953.0
52,5°	43.3	42.8	42.8	43.0	39.3	37.2	36.6	8.9	961.8
55,0°	33.3	32.4	32.9	33.7	30.5	28.7	28.3	7.1	968.9
57,5°	25.9	25.4	25.9	26.8	24.5	22.9	22.9	5.8	974.7
60,0°	20.9	20.2	21.2	21.8	20.4	18.9	19.2	4.9	979.5
62,5°	16.9	16.2	17.4	18.0	17.2	15.9	16.4	4.1	983.6
65,0°	14.9	13.6	14.4	15.1	14.8	13.6	14.4	3.6	987.2
67,5°	12.3	11.4	12.5	12.4	13.0	11.7	12.6	3.1	990.3
70,0°	10.4	9.5	10.5	10.1	11.1	10.1	11.0	2.7	993.0
72,5°	8.2	7.7	7.9	8.2	8.7	8.6	9.5	2.2	995.2
75,0°	6.5	6.0	6.0	6.4	6.6	7.1	7.9	1.7	996.9
77,5°	4.5	4.3	4.4	4.7	5.1	5.6	6.3	1.3	998.2
80,0°	2.9	2.7	2.9	3.1	3.5	4.1	4.7	0.9	999.1
82,5°	1.3	1.4	1.6	1.8	2.2	2.7	3.3	0.5	999.7
85,0°	0.6	0.6	0.6	0.7	1.0	1.4	1.8	0.3	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Highbay 11			Order number: 51HN12DB4MDA EAN: 4069025358288							LP number 59710_136	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	19.9	21.2	20.3	21.5	21.8	19.6	20.9	20.0	21.2	21.5
	3H	19.9	21.1	20.3	21.4	21.7	19.6	20.8	20.0	21.1	21.5
	4H	19.9	21.0	20.3	21.3	21.7	19.7	20.7	20.1	21.1	21.4
	6H	19.9	20.8	20.3	21.2	21.6	19.7	20.6	20.1	21.0	21.4
	8H	20.0	20.8	20.4	21.1	21.5	19.8	20.6	20.2	21.0	21.4
	12H	19.9	20.7	20.4	21.1	21.5	19.8	20.5	20.2	20.9	21.3
4H	2H	19.8	20.9	20.2	21.2	21.6	19.5	20.6	19.9	20.9	21.3
	3H	19.9	20.7	20.3	21.1	21.5	19.6	20.5	20.0	20.9	21.3
	4H	19.9	20.6	20.3	21.0	21.5	19.6	20.4	20.1	20.8	21.3
	6H	19.8	20.5	20.3	20.9	21.4	19.7	20.3	20.2	20.8	21.2
	8H	19.8	20.4	20.3	20.8	21.3	19.7	20.3	20.2	20.7	21.2
	12H	19.8	20.3	20.3	20.7	21.2	19.7	20.2	20.2	20.7	21.2
8H	4H	19.8	20.4	20.3	20.8	21.3	19.6	20.2	20.1	20.6	21.1
	6H	19.8	20.2	20.3	20.7	21.2	19.6	20.1	20.1	20.6	21.1
	8H	19.7	20.1	20.2	20.6	21.2	19.6	20.1	20.2	20.6	21.1
	12H	19.7	20.0	20.2	20.5	21.1	19.7	20.0	20.2	20.5	21.1
12H	4H	19.8	20.3	20.3	20.7	21.2	19.6	20.1	20.1	20.5	21.0
	6H	19.8	20.1	20.3	20.6	21.2	19.6	20.0	20.2	20.5	21.0
	8H	19.7	20.0	20.3	20.6	21.1	19.7	20.0	20.2	20.5	21.0

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 852 B = 264	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45,0°	22130.1	21669.3	22524.9	23102.3	20610.4	19351.1	19294.2
50,0°	12330.0	12038.5	12025.9	12240.6	10984.0	10473.0	10293.3
55,0°	7748.7	7541.5	7649.2	7824.8	7098.1	6672.3	6592.1
60,0°	5573.3	5380.1	5653.0	5822.7	5451.6	5048.5	5112.8
65,0°	4702.7	4277.9	4559.7	4756.3	4657.5	4307.2	4550.6
70,0°	4042.0	3687.9	4079.4	3946.8	4329.8	3941.4	4304.4
75,0°	3331.1	3085.3	3077.0	3290.9	3419.2	3659.8	4079.8
80,0°	2248.9	2098.4	2220.5	2398.7	2707.5	3184.5	3630.0
85,0°	898.3	893.7	922.8	1080.4	1597.7	2128.7	2757.6

Photometric test report

Family
Highbay 11

Order number: 51HN12DB4MDA
EAN: 4069025358288

LP number
59710_136

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

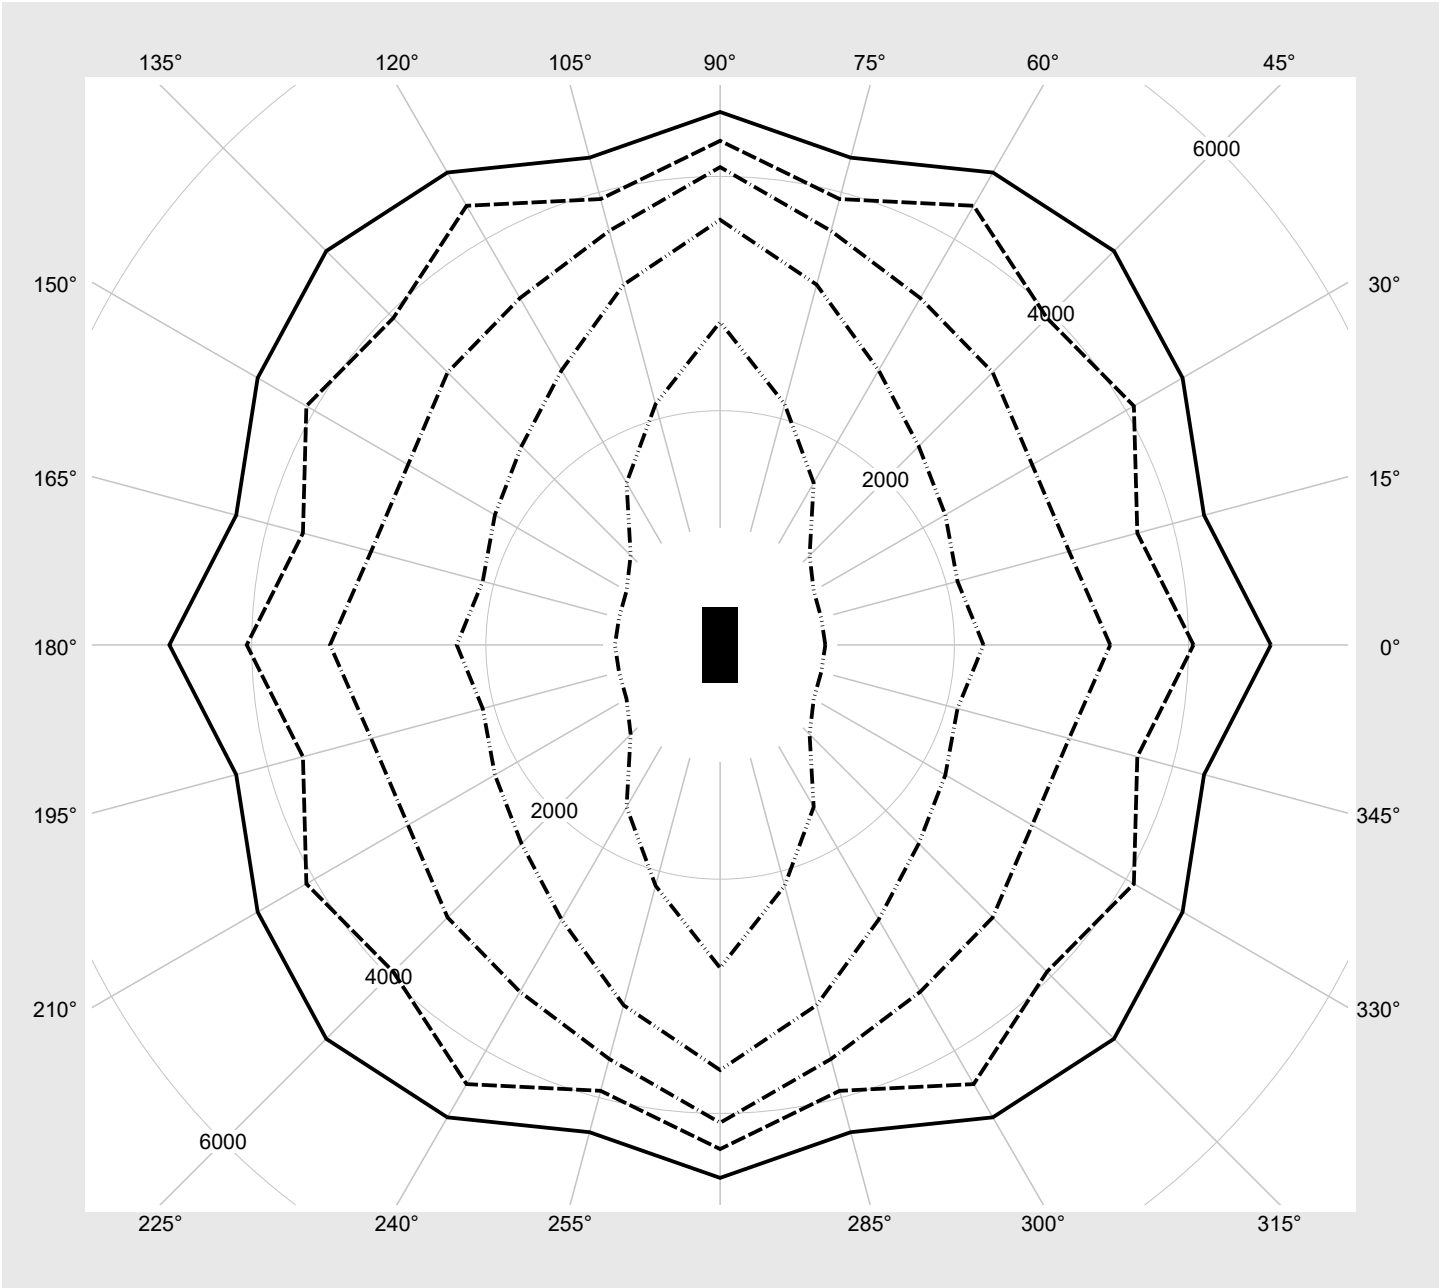

Photometric test report

Family Highbay 11	Order number: 51HN12DB4MDA EAN: 4069025358288	LP number 59710_136
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	30000	146.5
95	241	252	28538	138.7
90	227	250	26952	130.4
85	214	248	25476	122.7
80	201	245	23987	115.0
75	188	243	22496	107.5
70	175	240	20989	99.9
65	162	238	19482	92.3
60	149	234	17966	84.8
55	137	231	16558	77.9
50	124	228	15025	70.5
45	111	224	13477	63.0
40	99	219	12044	56.3
35	86	214	10478	48.9
30	74	209	9026	42.2
25	62	202	7560	35.5
20	49	194	5966	28.5
15	37	183	4482	21.8
10	25	169	2992	15.3
5	13	145	1488	8.4
2	5	110	482	3.9