

Photometric test report

Family

Streetlight 11 micro LED



Order number: 5XC1C51F08CE

EAN: 4058352557587

LP number

58063_418

Version

post-top or side-entry mounting

Optic

direct, asymmetric extremely wide distribution
P100001

Cover

transparent, PMMA

Lamps

LED 3000 K | CRI ≥ 70

Controlgear

ECG SITECO iQ


Rated values

Net luminous flux = 1600 lm
Power consumption = 10.8 W
Luminous efficacy = 148.1 lm/W

serial documentation

14.02.2025


siteco

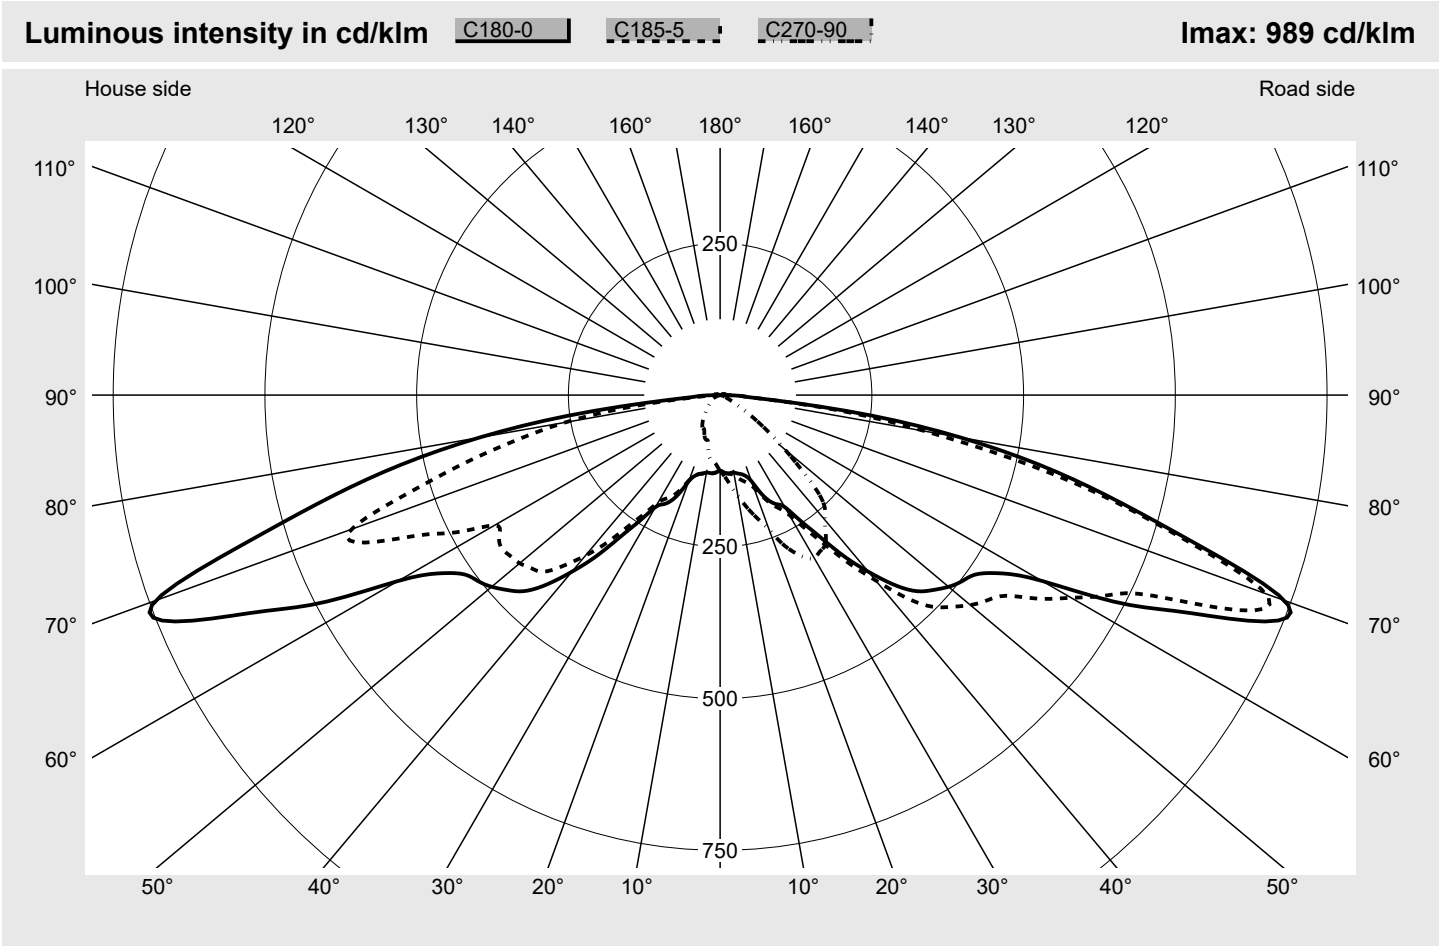

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	---
Eta 0° - 90°	100.0%	Imax 70°	989.5
Eta 90° - 180°	0.0%	Imax 80°	402.4
Measurement conditions		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
DIN EN 13032 and DIN 5032			

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C51F08CE EAN: 4058352557587	LP number 58063_418
Envelope curve in cd/klm KMK 70° KMK 67.5° KMK 65° KMK 62.5°		sit eco

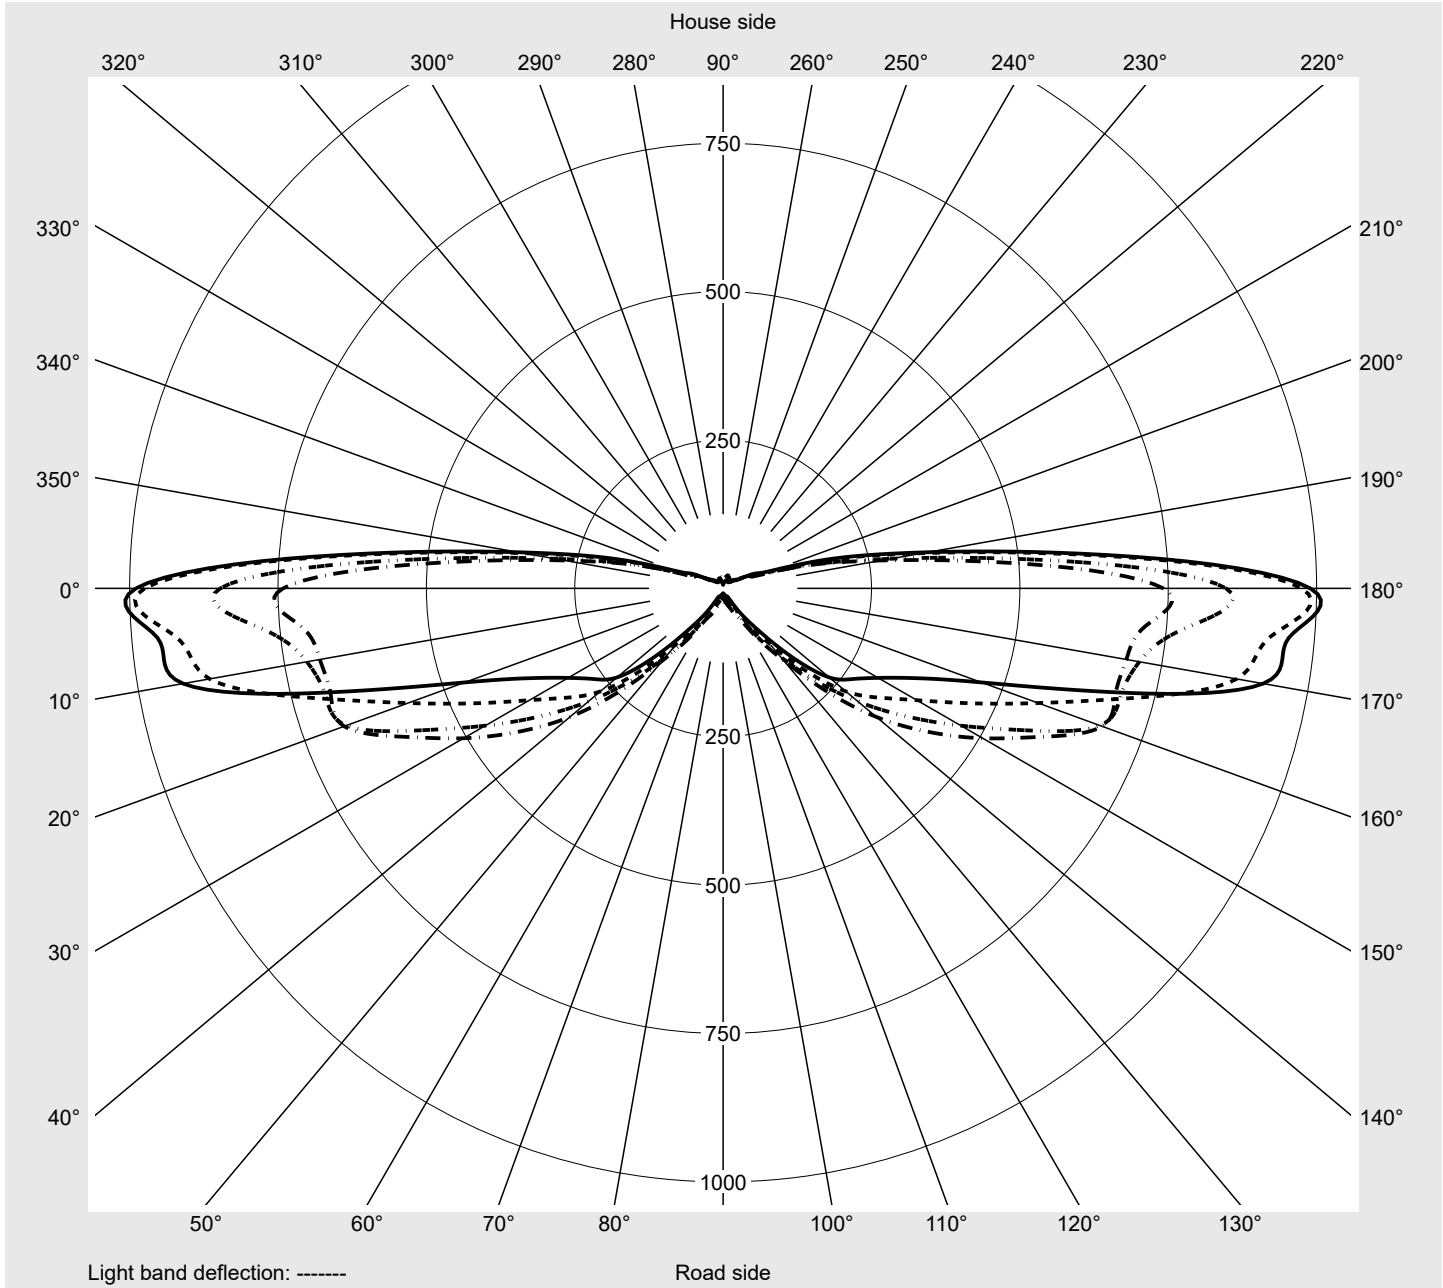

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C51F08CE EAN: 4058352557587	LP number 58063_418
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6
2,5°	127.0	126.9	126.7	127.1	127.5	127.3	127.1	128.3	129.5	129.7	130.1	130.6	131.2
5,0°	129.4	129.7	129.9	131.6	133.3	133.8	134.2	136.5	138.5	139.4	140.0	140.9	141.8
7,5°	129.5	131.2	133.6	138.7	143.9	146.8	149.1	151.9	154.4	155.9	156.8	157.5	158.1
10,0°	129.7	134.2	139.4	146.6	153.6	158.3	162.1	165.8	169.0	171.3	173.3	173.9	174.6
12,5°	132.2	140.4	148.4	155.8	162.3	167.0	171.3	176.3	181.1	185.3	189.4	189.9	190.5
15,0°	134.8	146.4	156.9	164.5	170.7	176.6	182.2	188.1	194.0	199.8	205.5	206.6	207.7
17,5°	139.8	152.1	163.1	170.1	176.2	184.1	192.2	199.8	207.4	215.7	222.8	226.3	228.6
20,0°	151.0	162.2	172.4	179.8	187.1	197.9	208.5	215.8	222.4	230.5	237.9	242.4	245.9
22,5°	174.4	179.0	184.6	194.4	206.6	220.1	234.5	236.8	239.6	243.7	248.6	253.7	259.0
25,0°	192.5	197.2	200.3	212.0	224.9	242.0	260.4	258.9	257.4	259.0	261.2	265.2	269.7
27,5°	202.8	210.3	217.6	227.2	238.5	251.8	265.9	270.3	274.3	276.8	278.7	280.3	281.7
30,0°	213.1	228.0	242.7	251.7	258.7	264.6	271.4	282.3	294.5	293.7	292.8	288.0	283.7
32,5°	244.6	260.4	276.7	281.4	286.1	286.2	286.4	306.4	326.3	316.5	305.5	289.8	274.8
35,0°	282.9	300.1	316.1	317.6	319.2	314.0	308.8	326.9	345.1	329.2	310.9	285.5	257.6
37,5°	333.9	349.8	361.3	359.3	357.4	348.9	340.5	341.1	341.8	326.7	305.4	265.9	220.2
40,0°	379.9	398.5	411.0	406.7	402.4	389.4	375.8	360.7	343.6	326.1	299.9	252.8	198.4
42,5°	423.6	452.2	475.0	468.4	461.7	442.8	420.4	388.6	352.5	315.2	277.3	240.7	204.4
45,0°	456.8	492.9	524.2	518.3	512.3	487.3	457.2	413.0	362.6	308.3	258.7	224.8	201.4
47,5°	475.5	516.4	551.6	551.7	551.9	521.1	484.9	433.5	374.3	306.8	245.7	210.0	186.6
50,0°	491.4	538.2	578.7	582.9	587.1	549.7	507.2	451.2	386.1	306.4	233.6	193.5	167.9
52,5°	503.2	555.2	600.4	609.4	618.4	574.3	526.5	470.9	404.4	312.6	225.5	175.0	141.6
55,0°	514.9	576.5	631.8	638.3	644.8	591.1	535.5	478.3	409.9	308.7	211.5	155.7	119.1
57,5°	546.5	624.5	690.5	680.1	669.8	598.7	528.8	467.0	396.4	287.5	185.0	133.5	103.0
60,0°	612.4	667.9	723.5	703.4	683.3	601.3	522.1	456.0	382.9	270.8	166.0	114.7	85.6
62,5°	741.6	715.8	690.0	684.7	679.5	591.9	505.0	421.3	336.9	242.9	158.3	106.2	64.7
65,0°	847.5	779.9	712.2	694.0	675.7	566.2	462.6	375.5	296.7	219.8	150.6	96.0	46.7
67,5°	974.7	926.6	878.5	713.8	564.9	457.9	376.9	321.0	270.1	194.9	121.9	73.7	32.8
70,0°	989.5	956.7	924.0	674.9	463.3	357.9	301.7	266.3	233.4	162.9	91.8	51.1	19.0
72,5°	831.9	816.0	800.1	583.1	366.1	295.6	234.6	206.1	179.1	118.9	59.9	32.6	14.6
75,0°	681.5	667.1	652.6	470.2	287.8	232.2	183.0	156.1	129.7	81.8	27.9	19.4	11.0
77,5°	548.6	506.8	451.2	346.8	243.9	193.2	158.6	118.0	80.3	48.7	19.3	14.0	8.7
80,0°	402.4	343.4	286.5	233.7	187.8	156.1	126.6	84.0	44.9	25.8	12.7	9.5	6.7
82,5°	236.3	206.9	176.9	143.8	113.5	94.6	77.5	52.1	28.7	17.2	9.4	7.2	5.2
85,0°	70.2	68.8	67.3	53.3	39.3	39.7	40.0	27.0	15.8	10.1	6.1	4.8	3.6
87,5°	35.1	34.4	33.7	26.6	19.6	17.6	15.0	10.4	5.9	3.8	2.3	1.8	1.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C51F08CE EAN: 4058352557587	LP number 58063_418
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6
2,5°	131.1	130.9	130.9	130.9	131.4	131.9	126.9	126.8	126.1	125.5	125.9	126.3	126.8
5,0°	141.5	141.3	141.2	141.1	141.4	141.8	129.1	128.6	127.9	127.1	127.7	128.4	128.2
7,5°	157.8	157.4	157.6	157.8	156.3	154.8	129.6	129.6	129.5	129.3	130.9	132.4	129.8
10,0°	174.4	174.2	173.9	173.5	171.2	169.0	130.3	130.9	131.7	132.5	132.9	133.3	129.2
12,5°	191.4	192.5	190.0	187.6	185.8	184.3	132.5	132.7	134.6	136.6	133.1	128.7	122.0
15,0°	208.6	209.6	205.9	202.3	201.4	200.5	134.6	134.4	137.9	141.3	133.2	126.0	121.3
17,5°	227.3	225.9	221.2	216.4	216.5	216.6	139.7	139.6	143.5	147.3	135.2	123.1	136.0
20,0°	243.2	240.3	236.8	233.2	234.6	236.0	149.3	147.6	150.0	152.3	139.2	126.0	144.7
22,5°	255.9	252.7	253.2	253.7	258.5	263.4	167.4	159.8	158.4	156.9	150.7	144.4	150.0
25,0°	266.4	263.2	268.7	274.2	279.5	284.8	182.5	171.8	164.9	159.3	153.9	149.1	145.3
27,5°	279.5	277.3	278.7	280.0	290.8	301.5	192.1	180.4	169.0	157.3	144.5	132.5	124.7
30,0°	280.8	278.3	282.1	285.9	297.9	309.9	204.4	194.7	177.5	157.5	136.4	117.1	105.2
32,5°	265.9	258.9	270.2	281.7	293.6	305.8	231.5	215.7	189.9	160.5	129.5	102.7	89.7
35,0°	249.1	240.7	259.9	277.5	290.3	301.7	264.1	240.1	204.4	164.7	127.2	89.9	79.7
37,5°	221.8	223.5	244.4	263.2	275.5	285.6	306.6	270.5	223.9	172.9	123.8	74.6	67.8
40,0°	203.1	207.9	226.8	244.2	257.0	268.4	345.3	299.3	239.5	176.3	121.8	69.1	61.7
42,5°	201.2	197.9	209.1	221.7	238.2	256.0	381.0	325.6	248.6	172.7	120.2	83.0	62.5
45,0°	189.2	181.7	186.8	191.9	211.1	230.3	411.6	352.0	259.0	169.0	119.6	88.2	65.7
47,5°	170.0	157.1	152.5	147.9	164.8	181.6	422.2	353.0	248.0	149.8	105.3	81.5	60.8
50,0°	146.6	130.9	119.6	110.2	124.7	139.2	431.1	353.9	248.2	131.8	100.7	72.8	54.5
52,5°	116.3	98.9	87.1	77.9	90.5	103.0	435.6	350.8	238.4	115.6	86.2	60.3	45.3
55,0°	92.1	74.1	62.4	53.8	63.4	73.0	439.5	347.7	228.5	99.2	72.5	49.5	37.7
57,5°	77.0	58.9	48.1	40.5	44.9	49.2	431.5	306.1	191.4	78.2	58.5	38.8	32.3
60,0°	61.9	46.2	36.8	30.3	30.9	31.5	429.1	264.5	155.8	65.7	49.2	32.6	28.1
62,5°	49.8	36.7	29.4	24.0	22.9	21.8	489.6	270.9	151.9	66.0	48.8	34.0	26.1
65,0°	37.0	28.3	22.5	18.6	16.3	14.7	546.3	287.4	155.7	66.3	49.2	34.1	25.5
67,5°	26.6	20.9	16.7	13.7	12.1	11.0	635.2	341.7	186.3	76.8	54.4	32.0	24.6
70,0°	17.0	14.9	12.3	9.9	8.9	8.2	646.5	350.5	195.4	87.3	59.0	30.7	23.7
72,5°	12.4	10.4	8.9	7.6	7.1	6.6	541.4	290.6	159.2	67.5	48.8	32.7	24.1
75,0°	8.9	7.1	6.2	5.6	5.4	5.2	439.7	231.4	123.8	49.7	39.9	30.9	23.8
77,5°	7.0	5.5	4.7	4.2	3.9	3.7	344.9	171.2	87.0	32.7	27.6	22.8	18.7
80,0°	5.1	4.1	3.4	3.0	2.8	2.6	258.9	115.4	67.6	19.9	17.9	16.0	14.2
82,5°	4.0	3.2	2.6	2.2	2.0	1.9	151.3	66.3	39.6	12.8	11.7	10.8	10.3
85,0°	2.8	2.2	1.7	1.5	1.3	1.2	43.7	17.3	12.2	7.2	6.8	6.4	6.5
87,5°	1.0	0.8	0.7	0.6	0.5	0.5	21.9	8.7	5.7	2.7	2.5	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED		Order number: 5XC1C51F08CE EAN: 4058352557587										LP number 58063_418	
Table of values for luminous intensities										Maximum luminous intensity		sīteco	
C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	124.6	0.2	0.2
2,5°	127.2	125.8	124.4	123.3	122.1	120.5	119.0	118.1	117.5	117.1	116.9	1.5	1.7
5,0°	128.1	126.3	124.3	121.4	118.6	116.5	114.7	113.2	111.9	111.2	110.6	3.1	4.8
7,5°	127.0	123.7	120.0	116.4	112.7	112.6	112.4	110.5	108.6	108.6	108.5	4.9	9.7
10,0°	124.9	120.3	115.8	112.0	108.5	109.2	110.0	107.5	105.2	103.7	102.4	6.7	16.4
12,5°	114.6	116.9	119.2	112.6	106.6	102.8	99.8	96.1	92.9	91.4	90.3	8.6	25.0
15,0°	117.6	120.0	122.5	113.4	104.8	97.8	91.6	86.0	80.6	79.4	78.2	10.7	35.8
17,5°	148.9	131.4	115.8	105.4	97.9	92.3	87.9	83.2	78.7	77.8	77.0	13.1	48.9
20,0°	163.4	134.0	109.1	96.8	90.1	85.0	81.7	78.8	76.7	75.2	73.9	15.6	64.5
22,5°	155.6	128.1	104.0	90.2	79.8	75.5	71.8	69.9	68.6	68.3	68.1	18.4	82.9
25,0°	141.8	117.6	96.2	81.8	72.0	66.1	62.0	61.3	60.5	61.4	62.2	21.2	104.0
27,5°	116.0	99.6	83.3	74.1	68.0	63.2	59.2	59.4	59.6	60.5	61.3	23.6	127.6
30,0°	95.5	83.3	72.6	67.1	63.5	60.0	56.8	57.8	58.8	58.8	58.8	26.0	153.7
32,5°	81.8	72.5	65.0	60.7	58.2	56.4	55.0	55.0	55.0	54.5	54.0	28.7	182.4
35,0°	70.4	63.1	57.7	55.0	53.4	53.3	53.2	51.9	50.8	49.8	48.8	31.6	214.0
37,5°	61.4	55.7	50.2	49.8	49.4	48.1	47.1	46.5	46.2	44.4	42.5	34.2	248.2
40,0°	54.7	49.2	44.3	44.7	45.2	43.5	41.9	41.5	41.1	39.1	37.2	37.2	285.4
42,5°	51.9	45.1	40.7	40.4	39.9	39.1	37.9	36.1	34.1	33.6	33.2	40.8	326.2
45,0°	48.4	42.9	37.4	36.5	35.7	35.1	34.6	31.8	29.0	29.2	29.4	43.8	370.0
47,5°	43.9	39.3	34.7	33.6	32.5	32.3	32.1	29.2	26.3	25.9	25.6	45.2	415.2
50,0°	39.3	35.4	31.5	30.7	29.8	29.9	30.0	27.1	24.2	23.3	22.5	46.6	461.8
52,5°	34.0	30.7	27.5	27.5	27.4	28.0	28.6	25.5	22.9	21.4	20.3	47.5	509.2
55,0°	29.6	26.8	24.0	24.7	25.5	26.4	27.4	24.5	21.8	19.9	18.2	48.2	557.5
57,5°	26.7	23.4	20.9	22.8	24.4	25.6	26.7	23.9	21.2	18.7	16.2	48.7	606.2
60,0°	24.0	21.0	18.4	20.7	22.9	24.5	25.9	23.3	20.5	17.4	14.3	49.2	655.4
62,5°	21.5	18.4	16.3	18.5	20.6	22.1	23.4	20.9	18.5	16.0	13.6	50.0	705.4
65,0°	19.0	16.9	14.7	16.6	18.4	19.6	20.7	18.3	16.0	14.4	13.0	51.1	756.5
67,5°	18.4	15.5	13.7	15.1	16.3	17.3	18.2	15.5	13.0	11.1	9.3	52.9	809.3
70,0°	17.7	14.9	13.2	13.5	13.8	14.3	14.9	12.2	9.7	7.8	6.1	50.7	860.0
72,5°	18.0	15.7	13.6	12.0	10.8	10.2	9.8	7.8	6.1	4.6	3.2	42.6	902.6
75,0°	18.4	15.3	13.2	10.3	7.8	6.7	5.8	4.1	2.4	1.3	0.4	34.3	936.9
77,5°	15.5	13.5	11.9	9.5	7.1	5.3	3.8	2.5	1.5	0.8	0.2	26.3	963.2
80,0°	12.5	11.3	9.9	8.1	6.1	3.9	1.7	1.2	0.6	0.3	0.0	18.8	982.0
82,5°	9.6	8.2	6.6	5.4	4.3	2.9	1.3	0.8	0.4	0.2	0.1	11.5	993.5
85,0°	6.6	5.1	3.8	3.2	2.7	1.8	0.9	0.5	0.3	0.2	0.2	4.4	997.9
87,5°	2.5	1.9	1.4	1.2	1.0	0.7	0.3	0.2	0.1	0.1	0.1	2.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1C51F08CE EAN: 4058352557587	LP number 58063_418
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	1600	10.8	11.1	11.0
95	241	252	1518	10.3	10.6	10.4
90	229	250	1443	9.8	10.0	9.9
85	216	248	1361	9.3	9.5	9.4
80	203	246	1279	8.8	9.0	8.9
75	190	243	1197	8.3	8.5	8.4
70	178	241	1121	7.8	8.0	7.9
65	165	238	1039	7.4	7.5	7.4
60	152	235	957	6.9	7.0	7.0
55	140	232	882	6.4	6.6	6.5
50	127	229	800	6.0	6.1	6.0
45	114	225	718	5.5	5.6	5.6
40	102	221	643	5.0	5.1	5.0
35	89	216	561	4.6	4.7	4.6
30	76	210	479	4.1	4.2	4.2
28	72	208	454	4.0	4.1	4.0