

Photometric test report

Family
Streetlight 11 micro LED

Order number: 5XC1M41F08CE
EAN: 4058352557594

LP number
59453_411



Version post-top or side-entry mounting
Optic direct, asymmetric wide distribution
 S100001
Cover transparent, PMMA
Lamps LED 4000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 1890 lm
 Power consumption = 12.6 W
 Luminous efficacy = 150 lm/W

serial
documentation
14.02.2025

siteco

Luminous intensity in cd/klm


C180-0

C195-15

C200-20

C270-90

Imax: 661 cd/klm

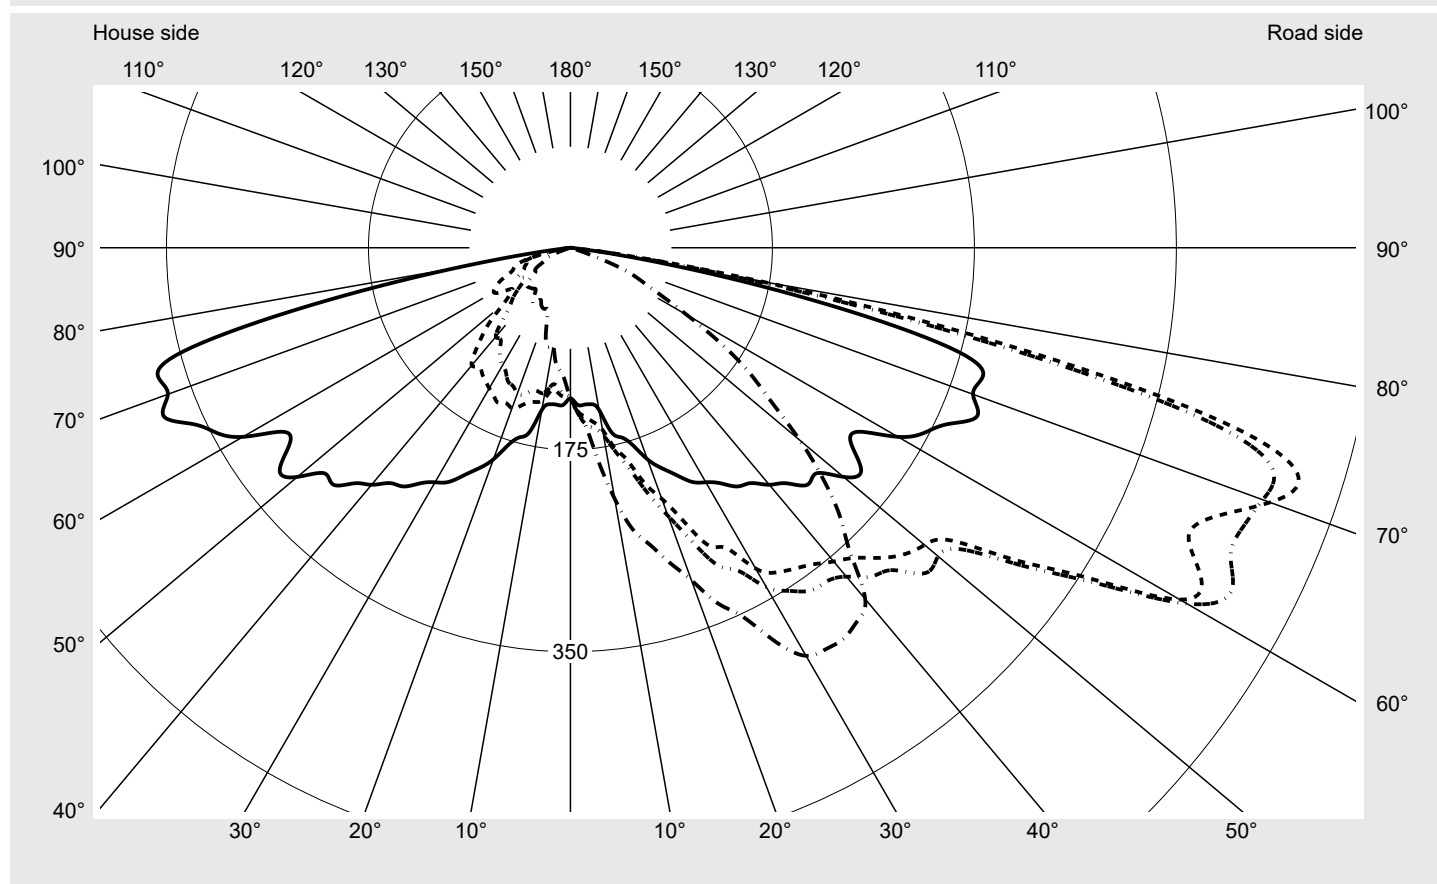

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Measurement conditions


DIN EN 13032 and DIN 5032

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	645.0
Imax 80°	167.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1M41F08CE EAN: 4058352557594	LP number 59453_411
Envelope curve in cd/klm KMK 72.5° KMK 70° KMK 67.5° KMK 65°		sit eco

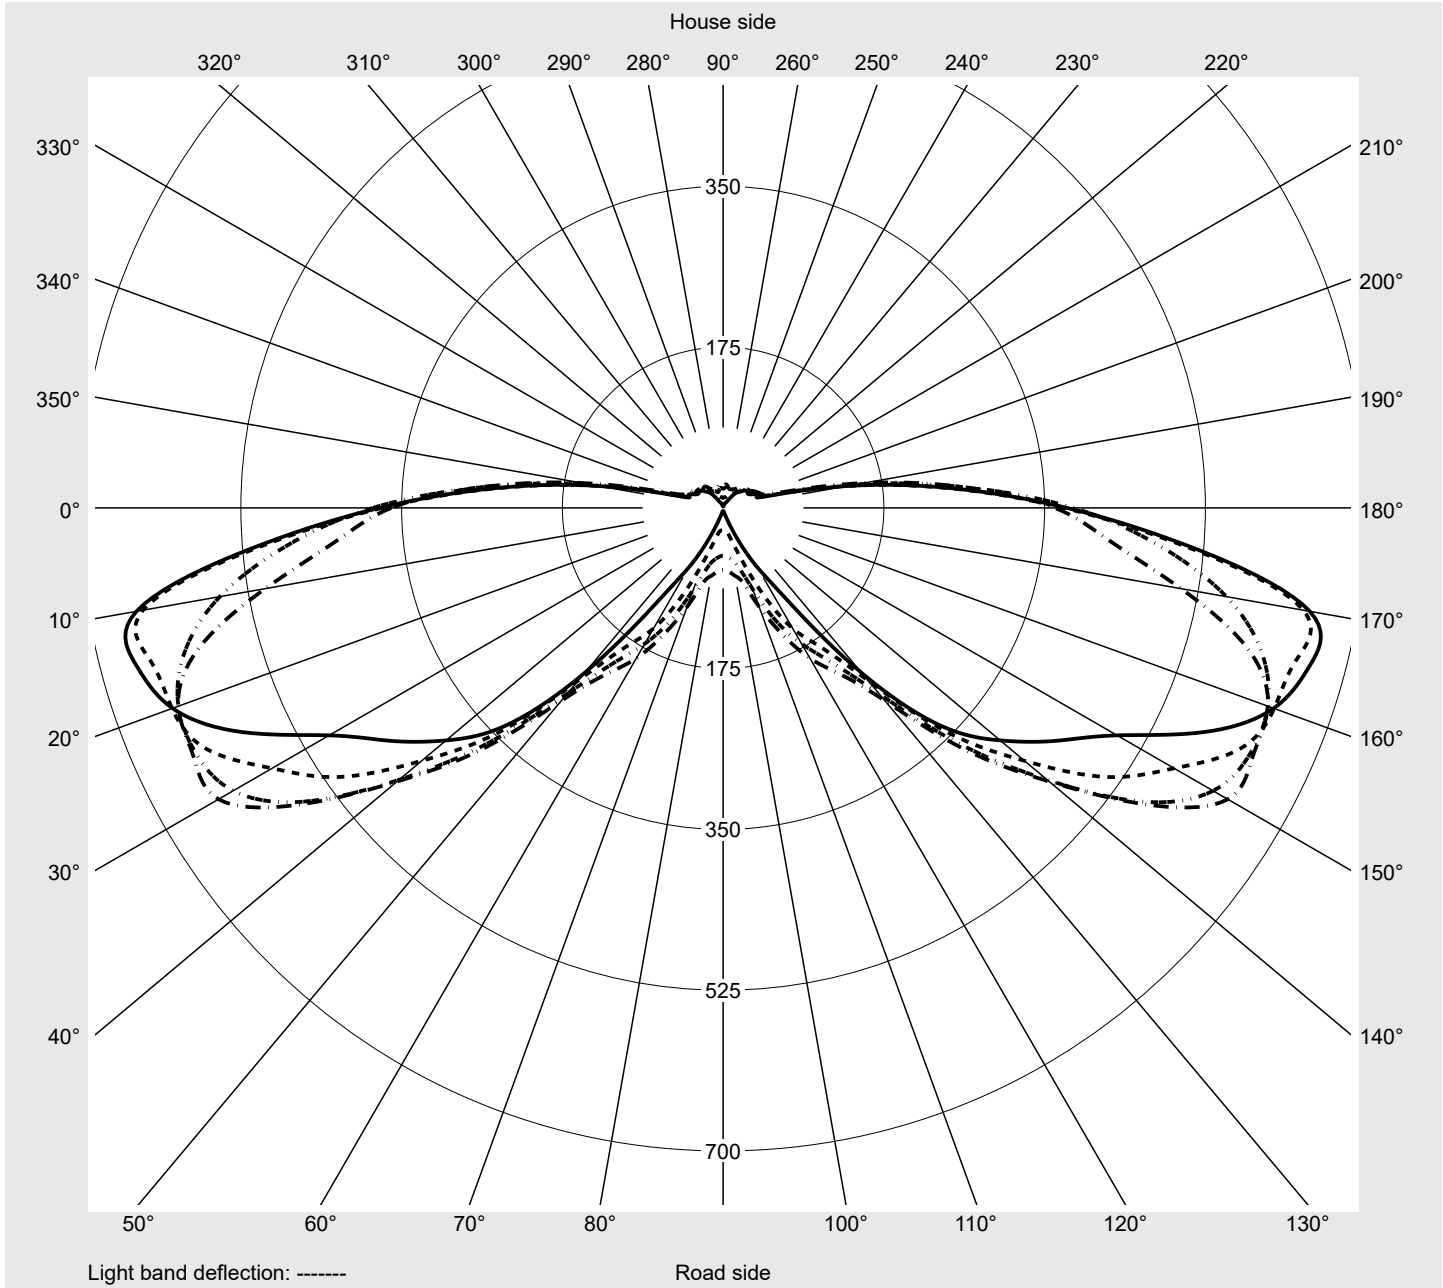

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1M41F08CE EAN: 4058352557594	LP number 59453_411
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5
2,5°	136.0	138.5	139.5	141.5	143.1	143.0	142.2	142.5	144.1	144.9	146.0	147.0	146.5
5,0°	136.5	139.7	143.0	147.1	153.5	155.8	154.9	157.2	159.8	161.3	162.4	161.4	159.9
7,5°	136.8	142.1	147.3	152.3	157.6	161.0	165.6	170.9	172.5	171.3	168.7	172.0	177.4
10,0°	142.6	147.8	153.0	160.3	165.1	169.3	177.3	184.1	187.2	191.2	197.2	200.3	201.5
12,5°	163.5	167.3	172.4	177.7	181.1	185.6	192.8	201.2	209.5	215.8	222.2	227.8	228.1
15,0°	170.1	176.4	184.9	190.6	198.6	206.4	211.4	221.4	229.1	235.7	249.5	253.9	257.3
17,5°	179.2	190.7	205.0	214.1	223.0	234.7	240.8	245.8	249.0	249.5	252.7	262.0	271.2
20,0°	195.1	207.0	215.2	231.4	247.2	258.6	268.3	276.9	278.8	279.9	278.5	281.6	289.1
22,5°	206.7	223.1	238.2	256.5	275.4	289.6	298.9	309.0	313.5	307.5	303.6	305.9	310.6
25,0°	217.3	238.7	261.6	285.0	304.1	321.3	330.9	339.9	339.8	328.5	325.0	328.2	331.9
27,5°	228.8	250.7	274.0	293.6	315.7	338.7	353.6	358.1	355.9	348.8	344.1	344.8	350.5
30,0°	234.6	257.8	285.1	320.9	339.6	353.2	369.3	375.8	373.0	369.3	367.3	365.9	370.3
32,5°	242.0	270.2	304.2	333.4	352.5	376.1	390.9	394.3	396.6	397.3	390.7	385.7	391.9
35,0°	252.5	278.7	309.9	339.3	362.7	383.0	387.6	394.2	399.9	400.7	399.8	396.9	399.9
37,5°	257.0	286.3	319.3	345.7	364.5	385.4	398.4	404.7	404.4	401.3	397.7	392.9	395.0
40,0°	268.1	303.0	333.2	354.8	372.0	393.7	405.0	408.1	406.8	400.0	392.0	388.4	386.3
42,5°	276.8	303.3	345.9	364.5	386.3	410.9	422.9	418.4	406.0	399.1	394.1	388.4	385.1
45,0°	290.4	314.6	356.8	380.0	395.0	419.0	427.9	425.9	414.6	410.1	393.1	372.1	367.5
47,5°	289.2	326.3	371.3	392.9	417.2	442.3	443.9	426.0	419.5	419.4	386.4	347.8	344.4
50,0°	308.9	351.5	380.8	400.6	415.9	441.5	454.5	442.7	420.7	400.5	372.2	341.7	317.5
52,5°	317.5	363.9	397.1	416.9	429.8	452.2	458.6	430.6	406.6	377.8	343.7	306.5	283.0
55,0°	297.2	367.5	434.3	472.6	481.5	479.0	482.2	456.7	420.1	362.3	306.7	278.1	254.3
57,5°	296.7	377.7	467.0	532.9	541.4	531.2	516.3	481.5	423.8	352.9	292.5	256.9	237.1
60,0°	327.7	424.7	532.9	609.7	616.7	592.2	550.6	499.9	432.9	346.5	293.2	258.0	225.8
62,5°	346.5	437.1	534.0	615.5	645.4	626.7	593.0	540.4	447.6	365.5	288.9	243.1	205.4
65,0°	361.3	424.1	506.1	591.1	631.1	636.8	634.3	563.0	463.4	371.8	274.1	220.4	189.1
67,5°	381.4	477.6	556.3	606.9	631.1	633.1	615.9	557.5	460.5	362.5	264.1	205.0	170.7
70,0°	371.2	512.4	641.5	645.0	638.4	620.8	567.0	510.7	428.4	345.5	245.1	184.7	151.5
72,5°	374.2	517.9	648.5	661.5	637.8	577.5	495.2	442.1	393.8	335.5	234.2	125.1	75.1
75,0°	347.7	473.1	561.8	587.5	559.1	469.3	379.1	352.4	316.6	217.7	99.9	32.0	9.7
77,5°	231.6	318.2	373.2	380.7	345.4	305.4	256.2	200.5	115.3	39.5	8.3	0.0	0.0
80,0°	101.0	138.7	164.6	167.3	147.4	125.6	89.2	36.7	6.9	0.0	0.0	0.0	0.0
82,5°	20.5	26.6	30.7	35.4	36.7	24.6	7.9	0.0	0.0	0.0	0.0	0.0	0.0
85,0°	0.0	0.0	0.0	0.1	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1M41F08CE EAN: 4058352557594	LP number 59453_411
------------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5
2,5°	144.8	144.1	144.5	144.0	142.6	142.1	133.5	131.6	129.3	126.9	125.2	124.6	123.8
5,0°	158.2	157.8	158.6	158.1	156.5	155.6	133.0	130.2	125.9	121.7	119.4	118.0	114.8
7,5°	178.7	179.4	181.1	183.4	185.1	186.9	132.9	129.1	124.4	119.7	116.9	115.9	112.8
10,0°	205.7	209.9	211.3	215.8	220.4	220.8	140.7	137.8	133.5	127.5	121.9	117.7	111.5
12,5°	232.7	236.3	237.8	243.2	249.0	250.1	154.5	145.0	136.9	127.7	121.4	117.1	113.6
15,0°	261.2	261.9	264.6	264.9	265.0	266.5	160.7	148.9	138.6	128.1	120.8	113.7	107.5
17,5°	277.5	280.8	283.9	286.2	285.1	286.2	166.3	155.1	143.7	133.1	121.5	111.5	104.3
20,0°	298.0	303.4	307.6	308.4	304.5	306.5	178.5	161.6	148.0	134.3	118.9	109.4	102.2
22,5°	320.7	328.0	334.6	335.8	333.1	333.4	182.1	163.0	145.8	129.8	117.7	105.7	95.7
25,0°	338.4	346.6	350.8	353.0	353.2	352.4	190.0	168.2	148.2	127.8	111.4	98.7	90.7
27,5°	359.7	366.9	370.6	377.0	383.3	384.8	200.1	173.4	144.1	121.3	106.9	93.9	79.2
30,0°	375.7	381.5	390.6	401.2	407.5	408.3	205.1	174.8	140.7	117.5	99.7	85.4	71.7
32,5°	393.6	392.0	404.9	419.2	418.6	412.3	207.4	171.7	136.9	113.1	95.0	80.0	69.1
35,0°	404.5	402.8	409.9	423.8	420.5	413.2	213.2	170.1	133.3	106.3	88.2	76.3	67.6
37,5°	399.5	403.3	410.9	416.6	412.9	408.1	213.8	171.6	130.0	99.6	82.1	71.8	65.5
40,0°	386.3	392.3	396.4	395.6	396.2	397.4	217.2	175.9	133.0	100.6	81.7	68.4	61.2
42,5°	386.4	382.6	367.3	363.4	362.2	359.2	228.1	176.0	122.2	89.8	74.3	61.1	55.4
45,0°	365.8	359.0	351.7	346.0	334.0	330.8	235.4	171.4	108.4	76.4	69.0	58.8	52.0
47,5°	342.4	323.4	311.8	307.1	297.3	297.4	228.3	158.8	93.8	69.4	63.7	55.9	47.6
50,0°	302.7	287.1	278.3	268.0	258.2	259.5	230.0	147.2	75.7	63.0	57.4	50.4	44.1
52,5°	267.1	256.9	246.3	226.1	218.2	219.8	221.6	132.2	65.8	55.3	48.9	43.5	41.7
55,0°	236.1	223.9	208.7	185.6	183.8	190.1	211.1	127.7	62.2	48.9	42.9	40.1	39.1
57,5°	214.9	185.4	166.0	156.8	153.2	155.2	215.4	136.8	71.9	47.9	41.8	36.8	35.6
60,0°	190.0	155.2	132.8	126.9	120.0	116.8	227.3	144.6	76.8	52.7	46.0	38.9	36.5
62,5°	169.1	132.8	109.1	99.1	89.9	86.8	251.8	153.0	72.6	48.8	41.4	37.5	34.4
65,0°	151.1	114.6	84.7	75.2	69.3	67.5	262.0	156.1	66.1	44.4	40.7	36.8	31.7
67,5°	135.0	94.0	68.0	57.8	53.7	51.9	261.8	147.7	56.2	43.0	38.7	36.4	32.8
70,0°	105.8	62.0	38.0	27.3	24.7	24.3	246.4	137.3	52.4	40.5	36.3	34.4	34.0
72,5°	39.1	15.5	7.3	4.1	3.5	3.4	247.9	137.3	48.9	40.1	34.9	31.0	31.9
75,0°	0.8	0.0	0.0	0.0	0.0	0.0	221.1	119.2	39.4	37.2	34.1	29.4	28.2
77,5°	0.0	0.0	0.0	0.0	0.0	0.0	144.4	78.3	25.0	25.1	25.2	20.5	15.8
80,0°	0.0	0.0	0.0	0.0	0.0	0.0	62.8	34.1	12.2	12.0	10.8	6.6	2.1
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	13.0	6.8	2.7	2.6	1.8	0.7	0.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED		Order number: 5XC1M41F08CE EAN: 4058352557594										LP number 59453_411	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	130.5	0.2	0.2
2,5°	122.7	120.0	117.8	117.0	116.9	114.6	112.3	113.9	114.3	113.7	114.7	1.6	1.8
5,0°	111.7	109.2	107.6	107.8	107.6	106.4	106.8	106.6	106.1	106.5	106.6	3.2	5.0
7,5°	109.8	108.4	104.8	100.5	98.9	96.9	95.7	96.6	96.1	97.0	99.1	5.0	10.0
10,0°	107.0	105.7	103.6	102.1	100.6	98.1	97.2	93.4	87.9	86.3	86.3	7.1	17.1
12,5°	108.9	103.0	100.0	97.9	96.7	94.5	92.5	90.1	87.2	86.9	87.7	9.5	26.6
15,0°	102.9	98.9	93.7	89.9	86.2	83.4	81.8	80.9	80.2	81.1	82.5	12.0	38.6
17,5°	97.9	92.0	87.4	83.5	79.7	75.4	71.2	70.8	70.5	69.2	68.3	14.5	53.1
20,0°	94.0	88.2	83.8	80.3	77.8	74.4	69.6	64.6	60.5	58.6	57.5	17.5	70.6
22,5°	87.7	80.7	77.3	76.3	74.7	70.4	67.8	65.8	63.3	59.0	57.3	20.8	91.4
25,0°	82.5	75.7	71.0	69.8	66.1	61.6	60.8	59.7	57.3	56.8	57.3	24.1	115.5
27,5°	74.4	72.4	69.4	66.4	61.7	58.7	57.3	57.1	56.9	55.4	54.9	27.4	142.9
30,0°	64.9	65.9	63.6	59.1	58.8	59.6	58.4	57.0	54.2	52.0	52.1	30.7	173.6
32,5°	64.8	61.8	58.4	57.3	57.7	56.3	53.8	53.2	53.4	55.5	57.3	34.1	207.7
35,0°	62.9	58.8	54.5	54.8	56.4	52.9	48.3	48.1	53.0	56.5	56.7	36.7	244.4
37,5°	60.6	57.7	54.8	53.1	52.5	52.4	51.6	49.2	49.3	50.9	51.0	38.9	283.3
40,0°	57.8	54.5	53.2	51.0	47.8	47.5	49.6	50.7	50.8	48.8	46.9	40.9	324.2
42,5°	54.2	51.8	48.1	46.9	46.8	48.5	49.4	49.8	49.9	48.7	48.0	42.5	366.7
45,0°	52.0	50.5	45.3	46.0	48.5	46.7	50.3	53.4	49.4	48.0	49.1	44.0	410.7
47,5°	44.6	45.0	44.6	44.1	42.0	42.4	45.4	48.7	46.6	46.2	50.1	44.6	455.3
50,0°	42.7	41.3	41.0	44.4	43.6	41.8	43.7	45.3	45.4	47.0	49.3	44.9	500.3
52,5°	42.8	40.1	37.4	40.8	42.8	41.7	39.9	41.4	43.3	44.0	43.9	44.4	544.7
55,0°	39.5	36.8	37.5	39.4	39.1	38.7	37.6	37.9	37.9	37.7	37.2	44.9	589.6
57,5°	37.9	36.2	36.2	35.3	34.2	35.0	34.5	34.9	36.1	36.4	36.3	46.4	636.0
60,0°	36.1	36.7	35.0	31.8	29.8	29.4	31.0	31.5	31.8	32.4	33.0	49.2	685.2
62,5°	31.2	33.6	34.9	30.3	27.4	26.1	26.3	27.8	28.2	27.2	26.2	50.5	735.7
65,0°	29.9	30.4	30.5	26.2	23.6	22.4	21.6	22.8	25.2	25.6	24.1	50.4	786.1
67,5°	30.4	27.7	24.1	21.8	21.1	20.1	18.3	18.6	21.4	21.9	20.8	50.7	836.8
70,0°	32.0	26.4	22.3	18.3	17.7	16.6	13.9	12.3	12.1	11.4	10.9	49.4	886.2
72,5°	29.0	24.5	20.6	12.7	7.4	6.2	4.3	2.6	1.9	1.7	1.6	45.6	931.7
75,0°	24.1	16.9	8.6	3.1	0.8	0.2	0.0	0.0	0.0	0.0	0.0	36.5	968.3
77,5°	10.3	3.7	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	21.7	990.0
80,0°	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	8.4	998.4
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.6	1000.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1M41F08CE EAN: 4058352557594	LP number 59453_411
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	1890	12.6	12.9	12.8
95	241	252	1793	12.0	12.3	12.2
90	229	250	1704	11.4	11.7	11.6
85	216	248	1607	10.8	11.0	10.9
80	203	246	1511	10.1	10.4	10.2
75	190	243	1414	9.6	9.8	9.7
70	178	241	1324	9.0	9.2	9.1
65	165	238	1228	8.4	8.6	8.5
60	152	235	1131	7.8	8.0	7.9
55	140	232	1042	7.3	7.5	7.4
50	127	229	945	6.8	6.9	6.8
45	114	225	848	6.2	6.3	6.2
40	102	221	759	5.7	5.8	5.8
35	89	216	662	5.1	5.2	5.2
30	76	210	566	4.6	4.7	4.6
25	63	203	469	4.1	4.1	4.1
24	62	202	461	4.0	4.1	4.0