

# Photometric test report

<b>Family</b> <b>Highbay 11</b>	<b>Order number: 51HN12DA4FDA3C</b> <b>EAN: 4069025321060</b>	<b>LP number</b> <b>59710_263</b>
	<b>Version</b> primary light control with lens, PMMA, housing, white, wide distribution <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI <b>Setting</b> AC-mode <b>Rated values</b> Net luminous flux = 15000 lm Power consumption = 77.0 W Luminous efficacy = 194.8 lm/W	<b>serial documentation</b> <b>24.02.2025</b>

**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 772 cd/klm**



Classifications	
DIN 5040	A 6 0
CIE	N1=88 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

**Measurement conditions**  
DIN EN 13032 and DIN 5032

## Photometric test report

Family Highbay 11	Order number: 51HN12DA4FDA3C EAN: 4069025321060	LP number 59710_263
Table of values for luminous intensities		Maximum luminous intensity



C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0,0°	643.6	643.6	643.6	643.6	643.6	643.6	643.6	1.0	1.0
2,5°	644.5	645.1	645.0	644.3	644.2	643.7	641.7	7.7	8.7
5,0°	651.5	652.3	650.7	647.5	645.3	643.2	640.4	15.5	24.1
7,5°	669.6	669.1	664.2	657.2	651.2	645.8	641.3	23.5	47.6
10,0°	693.4	691.0	681.5	670.0	659.9	651.2	645.8	31.9	79.6
12,5°	711.8	709.4	700.3	685.9	671.9	660.7	654.0	40.7	120.2
15,0°	721.3	721.7	717.1	704.9	689.4	675.9	667.7	49.7	169.9
17,5°	743.8	740.8	737.9	726.5	708.9	693.0	684.2	59.4	229.3
20,0°	761.9	761.9	759.6	745.2	724.0	705.6	696.8	69.2	298.5
22,5°	772.0	771.2	770.0	754.7	731.1	710.8	702.6	78.2	376.7
25,0°	758.1	756.6	756.3	743.6	722.7	703.3	695.6	85.1	461.8
27,5°	706.7	709.5	709.5	700.0	685.7	672.3	667.0	87.8	549.7
30,0°	640.4	635.6	633.7	626.6	621.7	614.1	609.9	85.8	635.5
32,5°	530.6	537.6	535.6	526.2	530.2	524.1	520.8	78.1	713.6
35,0°	428.2	426.4	425.9	411.9	420.8	414.2	411.4	66.0	779.6
37,5°	322.5	323.4	327.0	311.0	319.4	310.8	308.2	53.0	832.6
40,0°	236.1	234.0	241.6	230.8	230.9	219.8	218.4	40.7	873.3
42,5°	162.3	165.3	172.9	171.1	161.7	151.3	150.8	30.2	903.5
45,0°	117.3	114.9	119.4	122.5	109.3	102.6	102.3	21.9	925.4
47,5°	80.5	81.4	82.8	85.5	75.2	71.4	70.8	15.9	941.3
50,0°	59.4	58.0	58.0	59.0	52.9	50.5	49.6	11.7	953.0
52,5°	43.3	42.8	42.8	43.0	39.3	37.2	36.6	8.9	961.8
55,0°	33.3	32.4	32.9	33.7	30.5	28.7	28.3	7.1	968.9
57,5°	25.9	25.4	25.9	26.8	24.5	22.9	22.9	5.8	974.7
60,0°	20.9	20.2	21.2	21.8	20.4	18.9	19.2	4.9	979.5
62,5°	16.9	16.2	17.4	18.0	17.2	15.9	16.4	4.1	983.6
65,0°	14.9	13.6	14.4	15.1	14.8	13.6	14.4	3.6	987.2
67,5°	12.3	11.4	12.5	12.4	13.0	11.7	12.6	3.1	990.3
70,0°	10.4	9.5	10.5	10.1	11.1	10.1	11.0	2.7	993.0
72,5°	8.2	7.7	7.9	8.2	8.7	8.6	9.5	2.2	995.2
75,0°	6.5	6.0	6.0	6.4	6.6	7.1	7.9	1.7	996.9
77,5°	4.5	4.3	4.4	4.7	5.1	5.6	6.3	1.3	998.2
80,0°	2.9	2.7	2.9	3.1	3.5	4.1	4.7	0.9	999.1
82,5°	1.3	1.4	1.6	1.8	2.2	2.7	3.3	0.5	999.7
85,0°	0.6	0.6	0.6	0.7	1.0	1.4	1.8	0.3	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

Family Highbay 11	Order number: 51HN12DA4FDA3C EAN: 4069025321060	LP number 59710_263
----------------------	--	------------------------

UGR-Table	Standard room	siteco	
-----------	---------------	--------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.9	21.2	20.3	21.5	21.8	19.6	20.9	20.0	21.2	21.5
	3H	19.9	21.1	20.3	21.4	21.7	19.6	20.8	20.0	21.1	21.5
	4H	19.9	21.0	20.3	21.3	21.7	19.7	20.7	20.1	21.1	21.4
	6H	19.9	20.8	20.3	21.2	21.6	19.7	20.6	20.1	21.0	21.4
	8H	20.0	20.8	20.4	21.1	21.5	19.8	20.6	20.2	21.0	21.4
	12H	19.9	20.7	20.4	21.1	21.5	19.8	20.5	20.2	20.9	21.3
4H	2H	19.8	20.9	20.2	21.2	21.6	19.5	20.6	19.9	20.9	21.3
	3H	19.9	20.7	20.3	21.1	21.5	19.6	20.5	20.0	20.9	21.3
	4H	19.9	20.6	20.3	21.0	21.5	19.6	20.4	20.1	20.8	21.3
	6H	19.8	20.5	20.3	20.9	21.4	19.7	20.3	20.2	20.8	21.2
	8H	19.8	20.4	20.3	20.8	21.3	19.7	20.3	20.2	20.7	21.2
	12H	19.8	20.3	20.3	20.7	21.2	19.7	20.2	20.2	20.7	21.2
8H	4H	19.8	20.4	20.3	20.8	21.3	19.6	20.2	20.1	20.6	21.1
	6H	19.8	20.2	20.3	20.7	21.2	19.6	20.1	20.1	20.6	21.1
	8H	19.7	20.1	20.2	20.6	21.2	19.6	20.1	20.2	20.6	21.1
	12H	19.7	20.0	20.2	20.5	21.1	19.7	20.0	20.2	20.5	21.1
12H	4H	19.8	20.3	20.3	20.7	21.2	19.6	20.1	20.1	20.5	21.0
	6H	19.8	20.1	20.3	20.6	21.2	19.6	20.0	20.2	20.5	21.0
	8H	19.7	20.0	20.3	20.6	21.1	19.7	20.0	20.2	20.5	21.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 426 B = 264
-----------------	---------------------------------	-------------------------------	--------------------

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45,0°		22130.1	21669.3	22524.9	23102.3	20610.4	19351.1	19294.2	
50,0°		12330.0	12038.5	12025.9	12240.6	10984.0	10473.0	10293.3	
55,0°		7748.7	7541.5	7649.2	7824.8	7098.1	6672.3	6592.1	
60,0°		5573.3	5380.1	5653.0	5822.7	5451.6	5048.5	5112.8	
65,0°		4702.7	4277.9	4559.7	4756.3	4657.5	4307.2	4550.6	
70,0°		4042.0	3687.9	4079.4	3946.8	4329.8	3941.4	4304.4	
75,0°		3331.1	3085.3	3077.0	3290.9	3419.2	3659.8	4079.8	
80,0°		2248.9	2098.4	2220.5	2398.7	2707.5	3184.5	3630.0	
85,0°		898.3	893.7	922.8	1080.4	1597.7	2128.7	2757.6	


**Photometric test report**

**Family**  
Highbay 11

**Order number: 51HN12DA4FDA3C**  
**EAN: 4069025321060**

**LP number**  
59710\_263

**Luminance values in cd/m<sup>2</sup>**      γ 65°    γ 70°    γ 75°    γ 80°    γ 85°      **siteco**

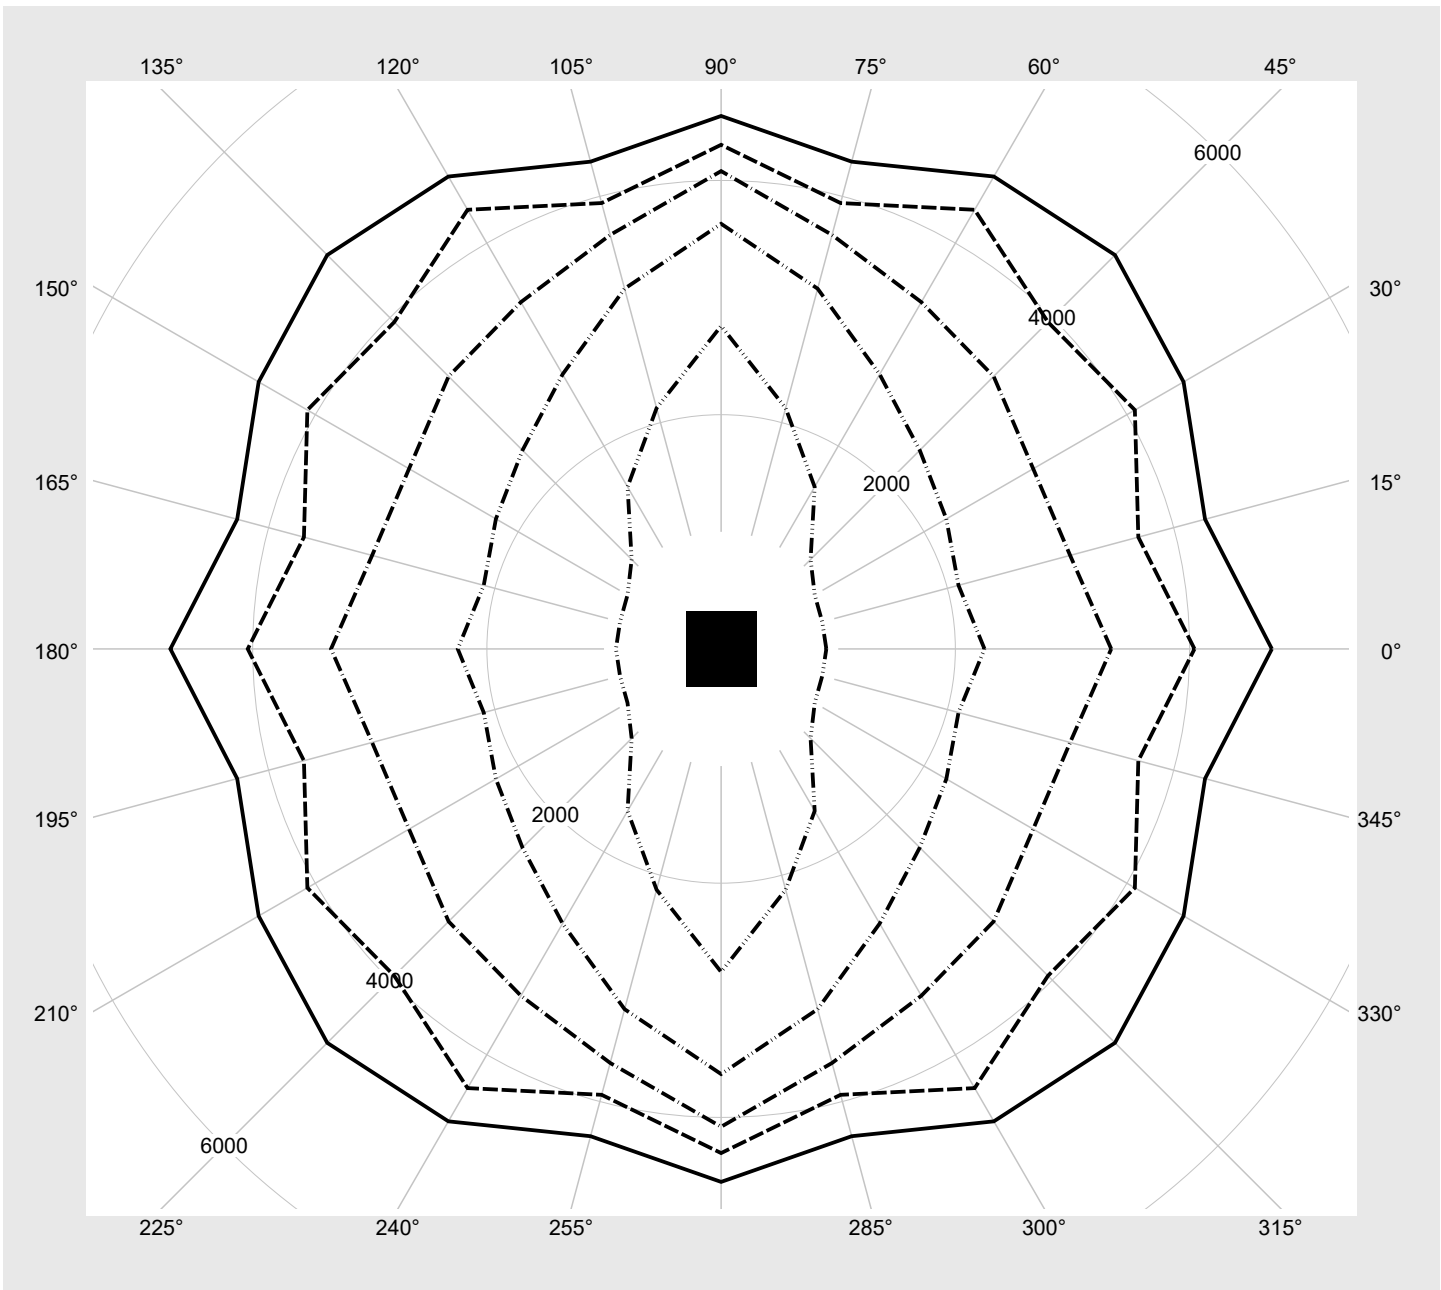

## Photometric test report

Family Highbay 11	Order number: 51HN12DA4FDA3C EAN: 4069025321060	LP number 59710_263
----------------------	--	------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
----------------------	---------------------------------	--------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	241	252	14266	73.2
90	227	250	13473	69.1
85	214	248	12736	65.3
80	201	245	11990	61.6
75	188	243	11246	57.7
70	175	240	10495	54.0
65	162	238	9737	50.2
60	149	234	8979	46.5
55	137	231	8274	43.1
50	124	228	7504	39.4
45	111	224	6733	35.7
40	99	219	6018	32.4
35	86	214	5233	28.7
30	74	209	4509	25.5
25	62	202	3779	22.1
20	49	194	2979	18.6
15	37	183	2239	15.4
10	25	169	1496	12.0
5	13	145	743	8.5
2	5	110	241	6.3