



Photometric test report

Family Highbay 11	Order number: 51HN11DA4KDA02 EAN: 4069025414007	LP number 59711_348
	Version	primary light control with lens, PMMA, housing, white, narrow distribution, with Node BT
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 23000 lm Power consumption = 117.7 W Luminous efficacy = 195.4 lm/W
		serial documentation 19.03.2025
		

Luminous intensity in cd/klm
C180-0
C270-90
Imax: 2679 cd/klm



Classifications	
DIN 5040	A 7 0
CIE	N1=85 N2=97 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 11	Order number: 51HN11DA4KDA02 EAN: 4069025414007	LP number 59711_348
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0,0°	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	4.0	4.0
2,5°	2608.0	2619.4	2619.4	2616.5	2617.6	2616.2	2606.1	31.3	35.3
5,0°	2420.1	2415.7	2414.1	2408.4	2406.6	2402.3	2391.7	57.6	92.8
7,5°	2113.4	2116.1	2112.3	2103.0	2097.6	2090.5	2079.6	75.2	168.1
10,0°	1780.1	1768.7	1762.7	1751.6	1743.6	1735.2	1724.7	83.4	251.5
12,5°	1410.1	1409.3	1404.7	1395.9	1388.1	1380.5	1373.1	82.8	334.3
15,0°	1106.5	1097.8	1095.0	1089.4	1083.1	1078.4	1073.9	77.3	411.5
17,5°	830.1	840.2	835.5	831.1	826.6	824.9	824.1	68.5	480.0
20,0°	671.1	661.9	651.8	643.2	639.9	639.4	641.0	60.8	540.8
22,5°	531.9	530.5	514.2	498.9	497.0	496.6	496.8	53.4	594.2
25,0°	450.6	441.3	420.6	401.3	399.0	395.8	392.4	47.9	642.1
27,5°	370.8	368.7	351.4	331.7	326.8	321.1	316.0	43.1	685.2
30,0°	320.4	312.1	300.8	284.1	278.0	270.2	264.7	39.7	724.9
32,5°	271.0	266.8	259.0	245.6	238.0	229.0	224.7	36.5	761.4
35,0°	235.8	228.9	222.7	210.5	201.6	193.0	191.7	33.3	794.7
37,5°	204.4	197.8	191.5	181.1	172.0	164.3	162.4	30.3	825.0
40,0°	176.7	170.7	163.1	154.3	146.1	138.3	135.6	27.3	852.2
42,5°	147.6	145.5	138.6	130.6	123.2	115.8	113.3	24.2	876.4
45,0°	126.0	121.8	116.3	109.0	102.0	95.3	93.2	21.1	897.6
47,5°	103.2	101.5	97.1	90.9	84.6	78.4	76.7	18.3	915.9
50,0°	85.9	82.9	79.4	74.6	69.1	63.7	61.9	15.5	931.4
52,5°	69.0	67.2	64.5	61.0	56.2	51.6	49.7	13.0	944.4
55,0°	55.6	54.1	52.2	49.5	45.7	41.7	40.0	10.9	955.3
57,5°	43.6	43.1	41.8	39.8	37.0	33.6	32.2	9.0	964.3
60,0°	33.2	33.3	33.9	32.4	30.5	27.5	26.1	7.4	971.7
62,5°	25.9	26.0	27.0	26.2	25.1	22.4	21.3	6.1	977.8
65,0°	21.6	21.2	21.7	21.3	20.9	18.8	17.7	5.1	982.9
67,5°	17.0	17.1	17.8	17.0	17.3	15.6	14.8	4.3	987.2
70,0°	13.5	13.4	14.4	13.6	14.1	13.0	12.4	3.5	990.7
72,5°	11.0	10.8	10.9	10.9	11.0	10.7	10.6	2.8	993.5
75,0°	9.0	8.4	8.4	8.3	8.6	9.0	8.9	2.3	995.8
77,5°	6.6	6.4	6.2	6.2	6.6	7.3	7.4	1.8	997.5
80,0°	4.4	4.2	4.1	4.2	4.7	5.7	5.8	1.3	998.8
82,5°	2.0	2.1	2.2	2.4	3.0	3.9	4.1	0.8	999.6
85,0°	0.8	0.8	0.8	1.0	1.5	2.2	2.4	0.4	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Highbay 11	Order number: 51HN11DA4KDA02 EAN: 4069025414007	LP number 59711_348
----------------------	--	------------------------

UGR-Table	Standard room	siteco	
-----------	---------------	--------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.4	21.6	20.7	21.9	22.2	19.2	20.4	19.5	20.7	21.0
	3H	20.6	21.6	21.0	22.0	22.3	19.5	20.5	19.9	20.8	21.2
	4H	20.7	21.6	21.1	22.0	22.4	19.6	20.6	20.0	20.9	21.3
	6H	20.7	21.6	21.2	21.9	22.3	19.8	20.6	20.2	21.0	21.4
	8H	20.8	21.5	21.2	21.9	22.3	19.9	20.6	20.3	21.0	21.4
	12H	20.8	21.4	21.2	21.8	22.2	19.9	20.6	20.3	20.9	21.4
4H	2H	20.4	21.4	20.8	21.7	22.1	19.4	20.3	19.8	20.7	21.1
	3H	20.8	21.5	21.2	21.9	22.4	19.8	20.6	20.2	21.0	21.4
	4H	20.9	21.6	21.3	22.0	22.4	20.0	20.7	20.4	21.1	21.5
	6H	20.9	21.5	21.4	22.0	22.4	20.2	20.8	20.6	21.2	21.7
	8H	20.9	21.5	21.4	21.9	22.4	20.3	20.8	20.7	21.2	21.7
	12H	20.9	21.4	21.4	21.8	22.3	20.3	20.7	20.8	21.2	21.7
8H	4H	20.9	21.4	21.3	21.8	22.3	20.0	20.5	20.5	21.0	21.5
	6H	20.9	21.4	21.4	21.8	22.4	20.2	20.7	20.7	21.1	21.6
	8H	20.9	21.3	21.4	21.8	22.3	20.3	20.7	20.8	21.2	21.7
	12H	20.9	21.2	21.4	21.7	22.3	20.4	20.7	20.9	21.2	21.8
12H	4H	20.8	21.3	21.3	21.7	22.2	20.0	20.4	20.5	20.9	21.4
	6H	20.9	21.3	21.4	21.8	22.3	20.2	20.6	20.7	21.1	21.6
	8H	20.9	21.2	21.4	21.7	22.3	20.3	20.6	20.8	21.1	21.7

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 426 B = 264
-----------------	---------------------------------	-------------------------------	--------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45,0°		36438.3	35221.9	33635.2	31531.4	29501.1	27571.1	26953.9	
50,0°		27316.7	26365.7	25248.9	23749.8	21969.0	20253.5	19680.2	
55,0°		19821.1	19284.5	18616.3	17649.3	16289.8	14868.9	14271.4	
60,0°		13599.5	13614.2	13867.4	13249.0	12461.2	11242.7	10681.6	
65,0°		10441.4	10265.2	10498.0	10328.1	10109.9	9085.4	8588.0	
70,0°		8089.6	7992.2	8585.9	8108.2	8414.3	7746.4	7403.2	
75,0°		7091.7	6655.6	6670.6	6580.5	6789.1	7079.1	7066.5	
80,0°		5173.7	4981.8	4819.3	4906.4	5482.3	6657.7	6793.1	
85,0°		1914.7	1891.3	1978.1	2236.2	3432.9	5054.3	5727.8	


Photometric test report

Family Highbay 11	Order number: 51HN11DA4KDA02 EAN: 4069025414007	LP number 59711_348
-----------------------------	--	-------------------------------

Luminance values in cd/m²

γ 65°	γ 70°	γ 75°	γ 80°	γ 85°
--------------	--------------	--------------	--------------	--------------

siteco

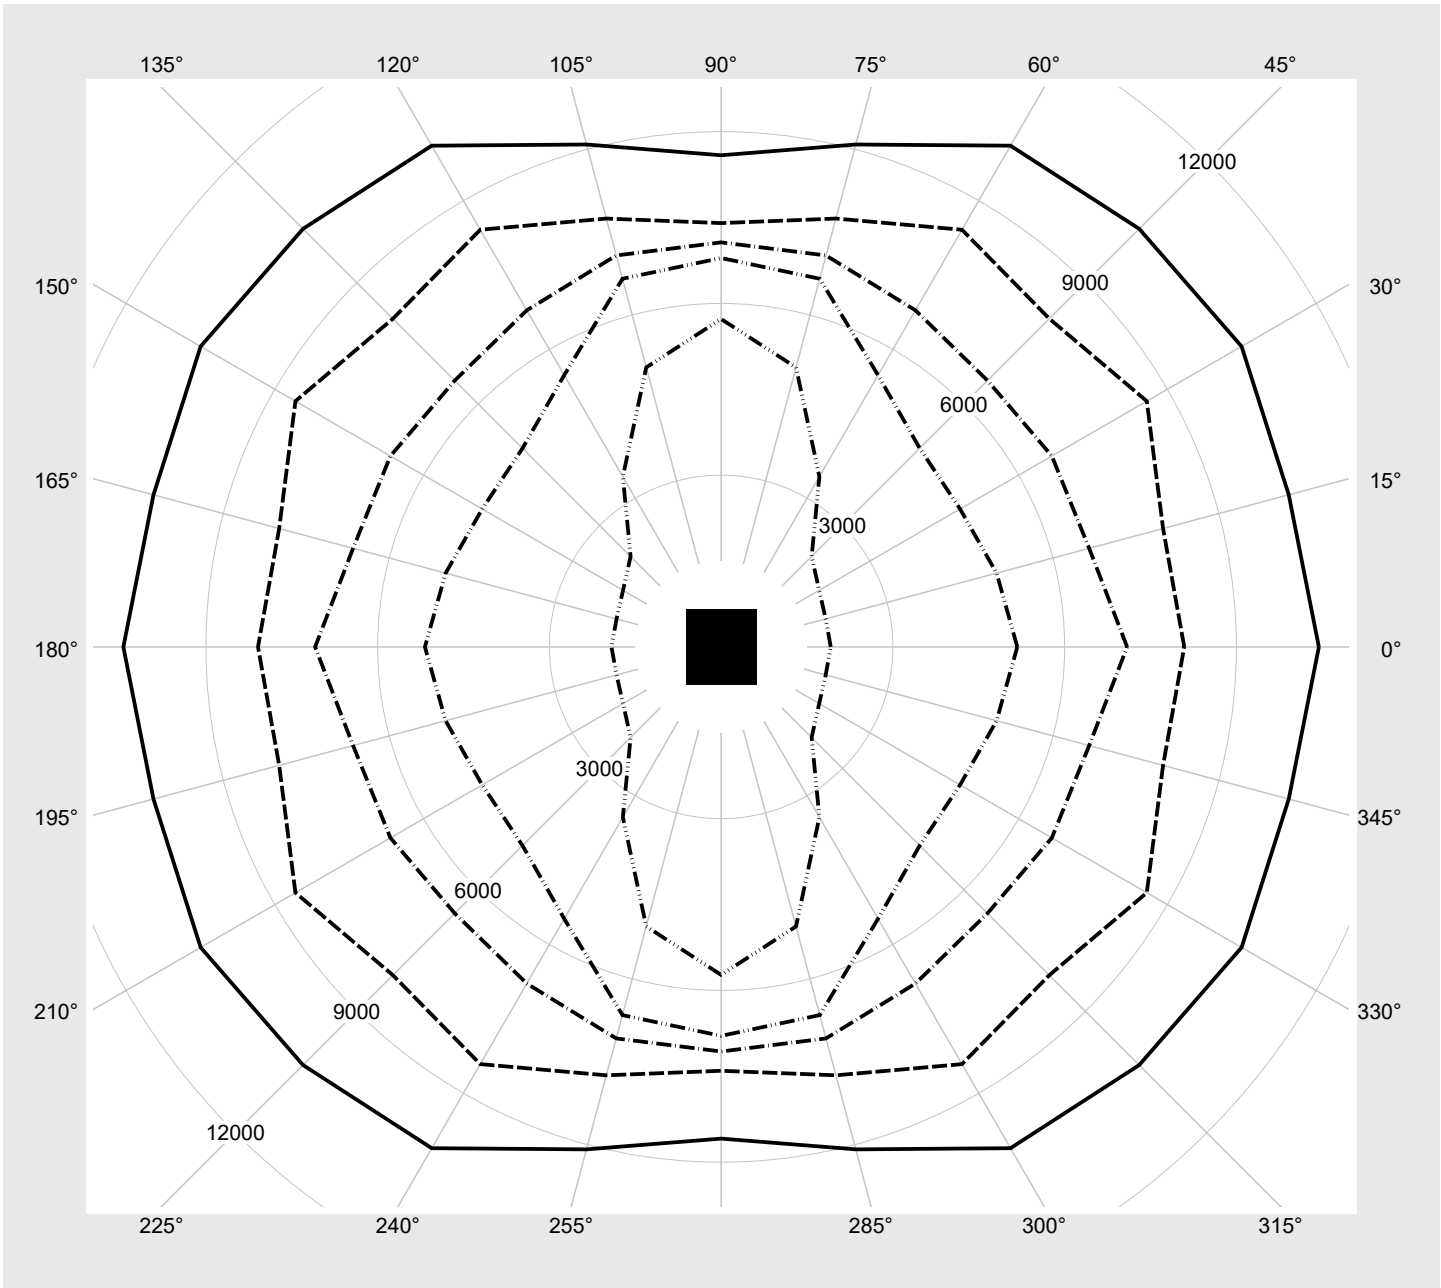

Photometric test report

Family Highbay 11	Order number: 51HN11DA4KDA02 EAN: 4069025414007	LP number 59711_348
----------------------	--	------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
----------------------	---------------------------------	--------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	23000	117.7
95	240	252	21817	111.0
90	227	250	20712	104.9
85	213	248	19510	98.3
80	200	245	18390	92.1
75	187	243	17257	86.1
70	174	240	16121	80.0
65	161	237	14975	74.0
60	148	234	13820	68.1
55	135	231	12656	62.1
50	122	227	11484	56.1
45	110	223	10395	50.6
40	97	219	9201	44.8
35	85	214	8092	39.4
30	72	208	6876	33.6
25	60	201	5747	28.3
20	48	193	4608	23.1
15	36	182	3453	17.9
10	24	168	2290	12.5
5	12	142	1112	7.0
2	6	117	520	4.3