

Photometric test report

Family Highbay 11	Order number: 51HN11DA5FLA EAN: 4069025424112	LP number 59711_389
	Version	primary light control with lens, PMMA, housing, white, for Licross® rail, narrow distribution
	Lamps	LED 5000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 14930 lm Power consumption = 73.2 W Luminous efficacy = 204 lm/W
		serial documentation 09.04.2025
		



Classifications		Luminaire light output ratios	
DIN 5040	A 7 0	η_{LB}	100.0%
CIE	N1=85 N2=97 N3=100	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions	
DIN EN 13032 and DIN 5032	

Photometric test report

Family Highbay 11	Order number: 51HN11DA5FLA EAN: 4069025424112	LP number 59711_389
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	4.0	4.0
2,5°	2608.0	2619.4	2619.4	2616.5	2617.6	2616.2	2606.1	31.3	35.3
5,0°	2420.1	2415.7	2414.1	2408.4	2406.6	2402.3	2391.7	57.6	92.8
7,5°	2113.4	2116.1	2112.3	2103.0	2097.6	2090.5	2079.6	75.2	168.1
10,0°	1780.1	1768.7	1762.7	1751.6	1743.6	1735.2	1724.7	83.4	251.5
12,5°	1410.1	1409.3	1404.7	1395.9	1388.1	1380.5	1373.1	82.8	334.3
15,0°	1106.5	1097.8	1095.0	1089.4	1083.1	1078.4	1073.9	77.3	411.5
17,5°	830.1	840.2	835.5	831.1	826.6	824.9	824.1	68.5	480.0
20,0°	671.1	661.9	651.8	643.2	639.9	639.4	641.0	60.8	540.8
22,5°	531.9	530.5	514.2	498.9	497.0	496.6	496.8	53.4	594.2
25,0°	450.6	441.3	420.6	401.3	399.0	395.8	392.4	47.9	642.1
27,5°	370.8	368.7	351.4	331.7	326.8	321.1	316.0	43.1	685.2
30,0°	320.4	312.1	300.8	284.1	278.0	270.2	264.7	39.7	724.9
32,5°	271.0	266.8	259.0	245.6	238.0	229.0	224.7	36.5	761.4
35,0°	235.8	228.9	222.7	210.5	201.6	193.0	191.7	33.3	794.7
37,5°	204.4	197.8	191.5	181.1	172.0	164.3	162.4	30.3	825.0
40,0°	176.7	170.7	163.1	154.3	146.1	138.3	135.6	27.3	852.2
42,5°	147.6	145.5	138.6	130.6	123.2	115.8	113.3	24.2	876.4
45,0°	126.0	121.8	116.3	109.0	102.0	95.3	93.2	21.1	897.6
47,5°	103.2	101.5	97.1	90.9	84.6	78.4	76.7	18.3	915.9
50,0°	85.9	82.9	79.4	74.6	69.1	63.7	61.9	15.5	931.4
52,5°	69.0	67.2	64.5	61.0	56.2	51.6	49.7	13.0	944.4
55,0°	55.6	54.1	52.2	49.5	45.7	41.7	40.0	10.9	955.3
57,5°	43.6	43.1	41.8	39.8	37.0	33.6	32.2	9.0	964.3
60,0°	33.2	33.3	33.9	32.4	30.5	27.5	26.1	7.4	971.7
62,5°	25.9	26.0	27.0	26.2	25.1	22.4	21.3	6.1	977.8
65,0°	21.6	21.2	21.7	21.3	20.9	18.8	17.7	5.1	982.9
67,5°	17.0	17.1	17.8	17.0	17.3	15.6	14.8	4.3	987.2
70,0°	13.5	13.4	14.4	13.6	14.1	13.0	12.4	3.5	990.7
72,5°	11.0	10.8	10.9	10.9	11.0	10.7	10.6	2.8	993.5
75,0°	9.0	8.4	8.4	8.3	8.6	9.0	8.9	2.3	995.8
77,5°	6.6	6.4	6.2	6.2	6.6	7.3	7.4	1.8	997.5
80,0°	4.4	4.2	4.1	4.2	4.7	5.7	5.8	1.3	998.8
82,5°	2.0	2.1	2.2	2.4	3.0	3.9	4.1	0.8	999.6
85,0°	0.8	0.8	0.8	1.0	1.5	2.2	2.4	0.4	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Highbay 11			Order number: 51HN11DA5FLA EAN: 4069025424112						LP number 59711_389		
UGR-Table			Standard room						siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.9	20.1	19.2	20.4	20.7	17.7	18.9	18.0	19.2	19.5
	3H	19.1	20.1	19.5	20.5	20.8	18.0	19.0	18.4	19.3	19.7
	4H	19.2	20.1	19.6	20.5	20.9	18.1	19.1	18.5	19.4	19.8
	6H	19.2	20.1	19.7	20.4	20.8	18.3	19.1	18.7	19.5	19.9
	8H	19.3	20.0	19.7	20.4	20.8	18.4	19.1	18.8	19.5	19.9
	12H	19.3	19.9	19.7	20.3	20.7	18.4	19.1	18.8	19.4	19.9
4H	2H	18.9	19.9	19.3	20.2	20.6	17.9	18.8	18.3	19.2	19.6
	3H	19.3	20.0	19.7	20.4	20.8	18.3	19.1	18.7	19.5	19.9
	4H	19.4	20.1	19.8	20.5	20.9	18.5	19.2	18.9	19.6	20.0
	6H	19.4	20.0	19.9	20.5	20.9	18.7	19.3	19.1	19.7	20.2
	8H	19.4	20.0	19.9	20.4	20.9	18.8	19.3	19.2	19.7	20.2
	12H	19.4	19.8	19.9	20.3	20.8	18.8	19.2	19.3	19.7	20.2
8H	4H	19.4	19.9	19.8	20.3	20.8	18.5	19.0	19.0	19.5	19.9
	6H	19.4	19.9	19.9	20.3	20.9	18.7	19.2	19.2	19.6	20.1
	8H	19.4	19.8	19.9	20.3	20.8	18.8	19.2	19.3	19.7	20.2
	12H	19.4	19.7	19.9	20.2	20.7	18.9	19.2	19.4	19.7	20.3
12H	4H	19.3	19.8	19.8	20.2	20.7	18.5	18.9	19.0	19.4	19.9
	6H	19.4	19.8	19.9	20.3	20.8	18.7	19.1	19.2	19.6	20.1
	8H	19.4	19.7	19.9	20.2	20.8	18.8	19.1	19.3	19.6	20.2

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 426 B = 264	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45,0°	23653.2	22863.6	21833.6	20468.0	19150.1	17897.3	17496.6
50,0°	17732.1	17114.8	16389.8	15416.7	14260.8	13147.2	12775.0
55,0°	12866.5	12518.1	12084.4	11456.7	10574.2	9651.9	9264.0
60,0°	8827.8	8837.4	9001.8	8600.3	8088.9	7298.0	6933.7
65,0°	6777.8	6663.5	6814.6	6704.3	6562.6	5897.6	5574.7
70,0°	5251.2	5188.0	5573.4	5263.3	5462.0	5028.4	4805.6
75,0°	4603.5	4320.3	4330.1	4271.6	4407.0	4595.3	4587.0
80,0°	3358.4	3233.8	3128.3	3184.9	3558.7	4321.7	4409.6
85,0°	1242.9	1227.7	1284.0	1451.6	2228.4	3280.9	3718.1

Photometric test report

Family
Highbay 11

Order number: 51HN11DA5FLA
EAN: 4069025424112

LP number
59711_389

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

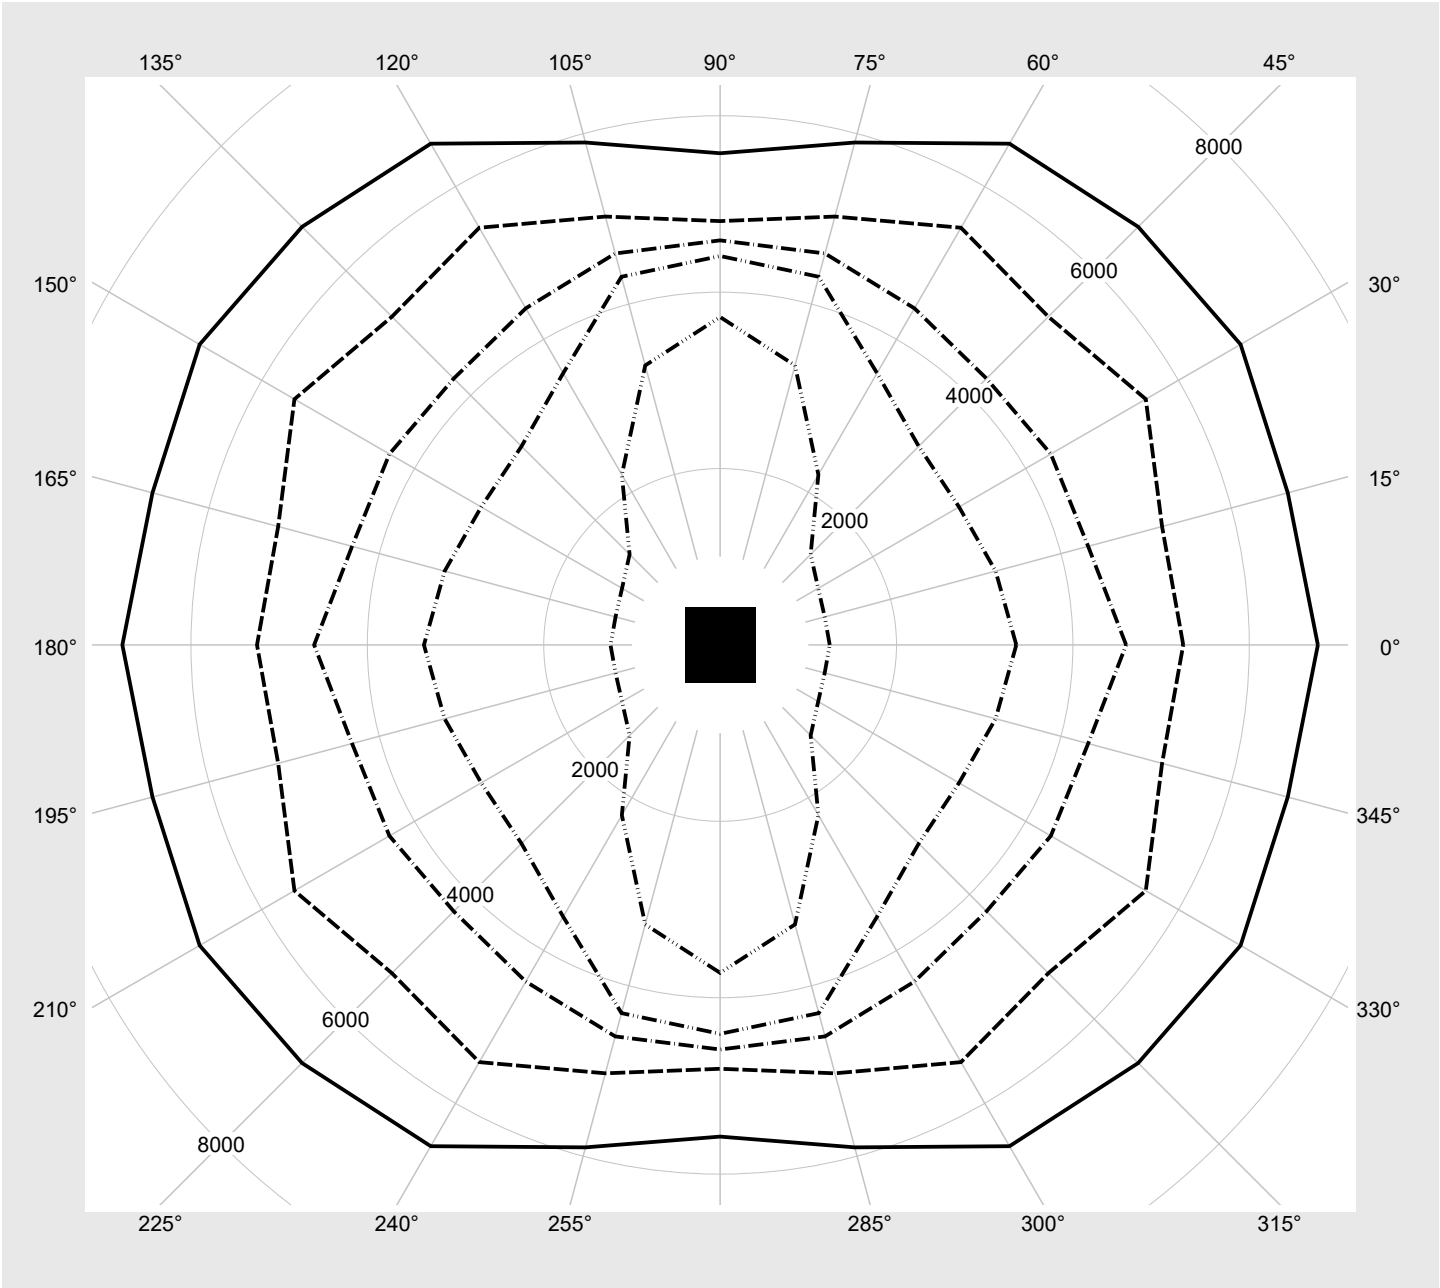

Photometric test report

Family Highbay 11	Order number: 51HN11DA5FLA EAN: 4069025424112	LP number 59711_389
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	14930	73.2
95	241	252	14197	69.4
90	227	250	13409	65.3
85	214	248	12674	61.5
80	201	245	11932	57.8
75	188	243	11191	53.9
70	175	240	10443	50.2
65	162	238	9689	46.4
60	149	234	8934	42.7
55	137	231	8233	39.3
50	124	228	7465	35.6
45	111	224	6699	31.9
40	99	219	5987	28.6
35	86	214	5206	24.9
30	74	209	4484	21.7
25	62	202	3759	18.3
20	49	194	2963	14.8
15	37	183	2227	11.6
10	25	169	1488	8.2
5	13	145	738	4.7
2	5	110	238	2.5