

Photometric test report

Family Highbay 11	Order number: 51HN11DB5MLA EAN: 4069025424365	LP number 59711_396
	Version	primary light control with lens, PMMA, housing, white, for Licross® rail, narrow distribution
	Lamps	LED 5000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 29840 lm Power consumption = 146.4 W Luminous efficacy = 203.8 lm/W
		serial documentation 09.04.2025
		



Classifications		Luminaire light output ratios	
DIN 5040	A 7 0	η_{LB}	100.0%
CIE	N1=85 N2=97 N3=100	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions	
DIN EN 13032 and DIN 5032	

Photometric test report

Family Highbay 11	Order number: 51HN11DB5MLA EAN: 4069025424365	LP number 59711_396
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	4.0	4.0
2,5°	2608.0	2619.4	2619.4	2616.5	2617.6	2616.2	2606.1	31.3	35.3
5,0°	2420.1	2415.7	2414.1	2408.4	2406.6	2402.3	2391.7	57.6	92.8
7,5°	2113.4	2116.1	2112.3	2103.0	2097.6	2090.5	2079.6	75.2	168.1
10,0°	1780.1	1768.7	1762.7	1751.6	1743.6	1735.2	1724.7	83.4	251.5
12,5°	1410.1	1409.3	1404.7	1395.9	1388.1	1380.5	1373.1	82.8	334.3
15,0°	1106.5	1097.8	1095.0	1089.4	1083.1	1078.4	1073.9	77.3	411.5
17,5°	830.1	840.2	835.5	831.1	826.6	824.9	824.1	68.5	480.0
20,0°	671.1	661.9	651.8	643.2	639.9	639.4	641.0	60.8	540.8
22,5°	531.9	530.5	514.2	498.9	497.0	496.6	496.8	53.4	594.2
25,0°	450.6	441.3	420.6	401.3	399.0	395.8	392.4	47.9	642.1
27,5°	370.8	368.7	351.4	331.7	326.8	321.1	316.0	43.1	685.2
30,0°	320.4	312.1	300.8	284.1	278.0	270.2	264.7	39.7	724.9
32,5°	271.0	266.8	259.0	245.6	238.0	229.0	224.7	36.5	761.4
35,0°	235.8	228.9	222.7	210.5	201.6	193.0	191.7	33.3	794.7
37,5°	204.4	197.8	191.5	181.1	172.0	164.3	162.4	30.3	825.0
40,0°	176.7	170.7	163.1	154.3	146.1	138.3	135.6	27.3	852.2
42,5°	147.6	145.5	138.6	130.6	123.2	115.8	113.3	24.2	876.4
45,0°	126.0	121.8	116.3	109.0	102.0	95.3	93.2	21.1	897.6
47,5°	103.2	101.5	97.1	90.9	84.6	78.4	76.7	18.3	915.9
50,0°	85.9	82.9	79.4	74.6	69.1	63.7	61.9	15.5	931.4
52,5°	69.0	67.2	64.5	61.0	56.2	51.6	49.7	13.0	944.4
55,0°	55.6	54.1	52.2	49.5	45.7	41.7	40.0	10.9	955.3
57,5°	43.6	43.1	41.8	39.8	37.0	33.6	32.2	9.0	964.3
60,0°	33.2	33.3	33.9	32.4	30.5	27.5	26.1	7.4	971.7
62,5°	25.9	26.0	27.0	26.2	25.1	22.4	21.3	6.1	977.8
65,0°	21.6	21.2	21.7	21.3	20.9	18.8	17.7	5.1	982.9
67,5°	17.0	17.1	17.8	17.0	17.3	15.6	14.8	4.3	987.2
70,0°	13.5	13.4	14.4	13.6	14.1	13.0	12.4	3.5	990.7
72,5°	11.0	10.8	10.9	10.9	11.0	10.7	10.6	2.8	993.5
75,0°	9.0	8.4	8.4	8.3	8.6	9.0	8.9	2.3	995.8
77,5°	6.6	6.4	6.2	6.2	6.6	7.3	7.4	1.8	997.5
80,0°	4.4	4.2	4.1	4.2	4.7	5.7	5.8	1.3	998.8
82,5°	2.0	2.1	2.2	2.4	3.0	3.9	4.1	0.8	999.6
85,0°	0.8	0.8	0.8	1.0	1.5	2.2	2.4	0.4	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Highbay 11		Order number: 51HN11DB5MLA EAN: 4069025424365							LP number 59711_396	
UGR-Table		Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)			
x	y									
2H	2H	18.9	20.1	19.2	20.4	20.7	17.7	18.9	18.0	19.2
	3H	19.1	20.1	19.5	20.5	20.8	18.0	19.0	18.4	19.3
	4H	19.2	20.1	19.6	20.5	20.9	18.1	19.1	18.5	19.4
	6H	19.2	20.1	19.7	20.4	20.8	18.3	19.1	18.7	19.5
	8H	19.3	20.0	19.7	20.4	20.8	18.4	19.1	18.8	19.5
	12H	19.3	19.9	19.7	20.3	20.7	18.4	19.1	18.8	19.4
4H	2H	18.9	19.9	19.3	20.2	20.6	17.9	18.8	18.3	19.2
	3H	19.3	20.0	19.7	20.4	20.8	18.3	19.1	18.7	19.5
	4H	19.4	20.1	19.8	20.5	20.9	18.5	19.2	18.9	19.6
	6H	19.4	20.0	19.9	20.5	20.9	18.7	19.3	19.1	19.7
	8H	19.4	19.9	19.9	20.4	20.9	18.8	19.3	19.2	19.7
	12H	19.4	19.8	19.9	20.3	20.8	18.8	19.2	19.3	19.7
8H	4H	19.4	19.9	19.8	20.3	20.8	18.5	19.0	19.0	19.5
	6H	19.4	19.9	19.9	20.3	20.8	18.7	19.2	19.2	19.6
	8H	19.4	19.8	19.9	20.3	20.8	18.8	19.2	19.3	19.7
	12H	19.4	19.7	19.9	20.2	20.7	18.9	19.2	19.4	19.7
12H	4H	19.3	19.8	19.8	20.2	20.7	18.5	18.9	19.0	19.4
	6H	19.4	19.8	19.9	20.3	20.8	18.7	19.1	19.2	19.6
	8H	19.4	19.7	19.9	20.2	20.8	18.8	19.1	19.3	19.6

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 852 B = 264	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45,0°	23637.4	22848.3	21819.0	20454.3	19137.2	17885.3	17484.9
50,0°	17720.2	17103.3	16378.9	15406.4	14251.2	13138.3	12766.4
55,0°	12857.9	12509.8	12076.3	11449.0	10567.1	9645.4	9257.8
60,0°	8821.9	8831.5	8995.7	8594.5	8083.5	7293.1	6929.1
65,0°	6773.3	6659.0	6810.0	6699.8	6558.2	5893.7	5571.0
70,0°	5247.7	5184.5	5569.6	5259.7	5458.3	5025.1	4802.4
75,0°	4600.4	4317.4	4327.2	4268.7	4404.1	4592.2	4584.0
80,0°	3356.2	3231.7	3126.2	3182.8	3556.4	4318.8	4406.7
85,0°	1242.1	1226.9	1283.2	1450.6	2226.9	3278.7	3715.6

Photometric test report

Family
Highbay 11

Order number: 51HN11DB5MLA
EAN: 4069025424365

LP number
59711_396

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

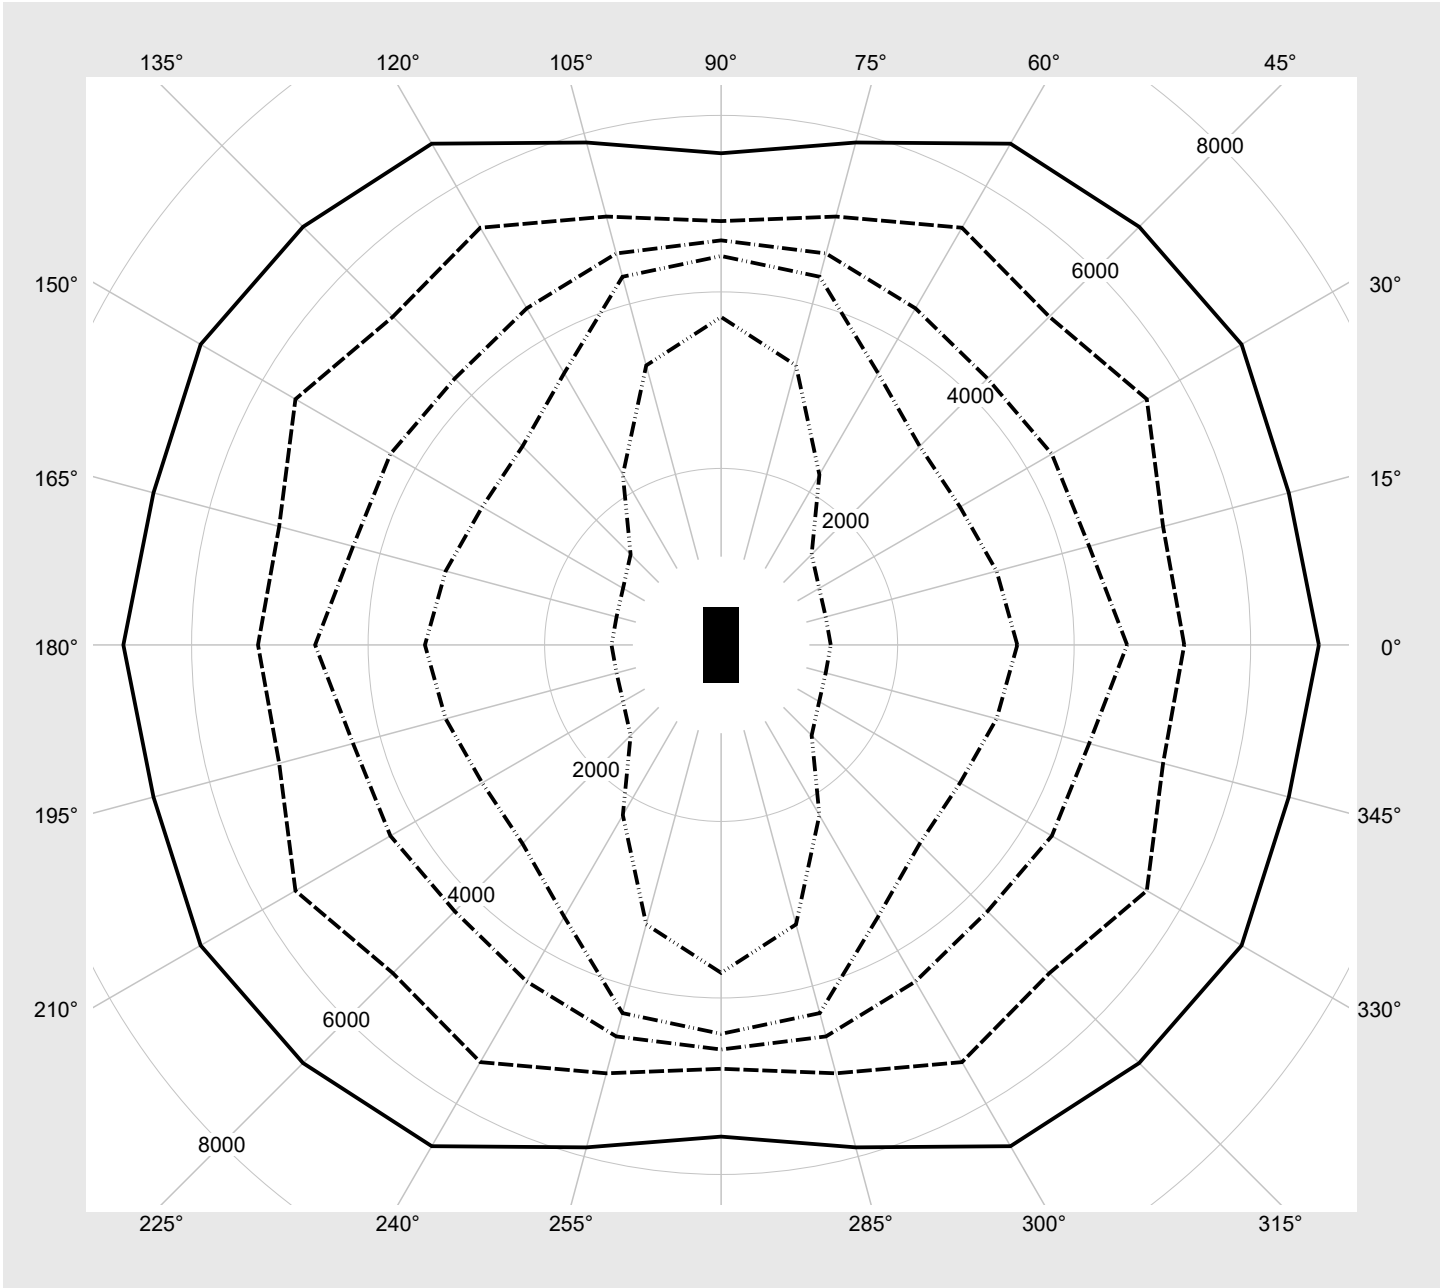

Photometric test report

Family Highbay 11	Order number: 51HN11DB5MLA EAN: 4069025424365	LP number 59711_396
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	29840	146.4
95	241	252	28384	138.6
90	227	250	26806	130.2
85	214	248	25337	122.5
80	201	245	23855	114.9
75	188	243	22371	107.3
70	175	240	20871	99.7
65	162	238	19373	92.2
60	149	234	17864	84.7
55	137	231	16463	77.8
50	124	228	14939	70.5
45	111	224	13398	62.9
40	99	219	11973	56.2
35	86	214	10415	48.8
30	74	209	8972	42.2
25	62	202	7514	35.5
20	49	194	5930	28.4
15	37	183	4454	21.8
10	25	169	2973	15.3
5	13	145	1478	8.4
2	5	110	478	3.9