

Photometric test report

Family
Highbay 11

Order number: 51HN12DA6LLA
EAN: 4069025424730

LP number
59710_408



Version primary light control with lens, PMMA, housing, white, for Licross® rail, wide distribution

Lamps LED 6500 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 26540 lm
Power consumption = 146.7 W
Luminous efficacy = 180.9 lm/W

serial
documentation
09.04.2025


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 772 cd/klm

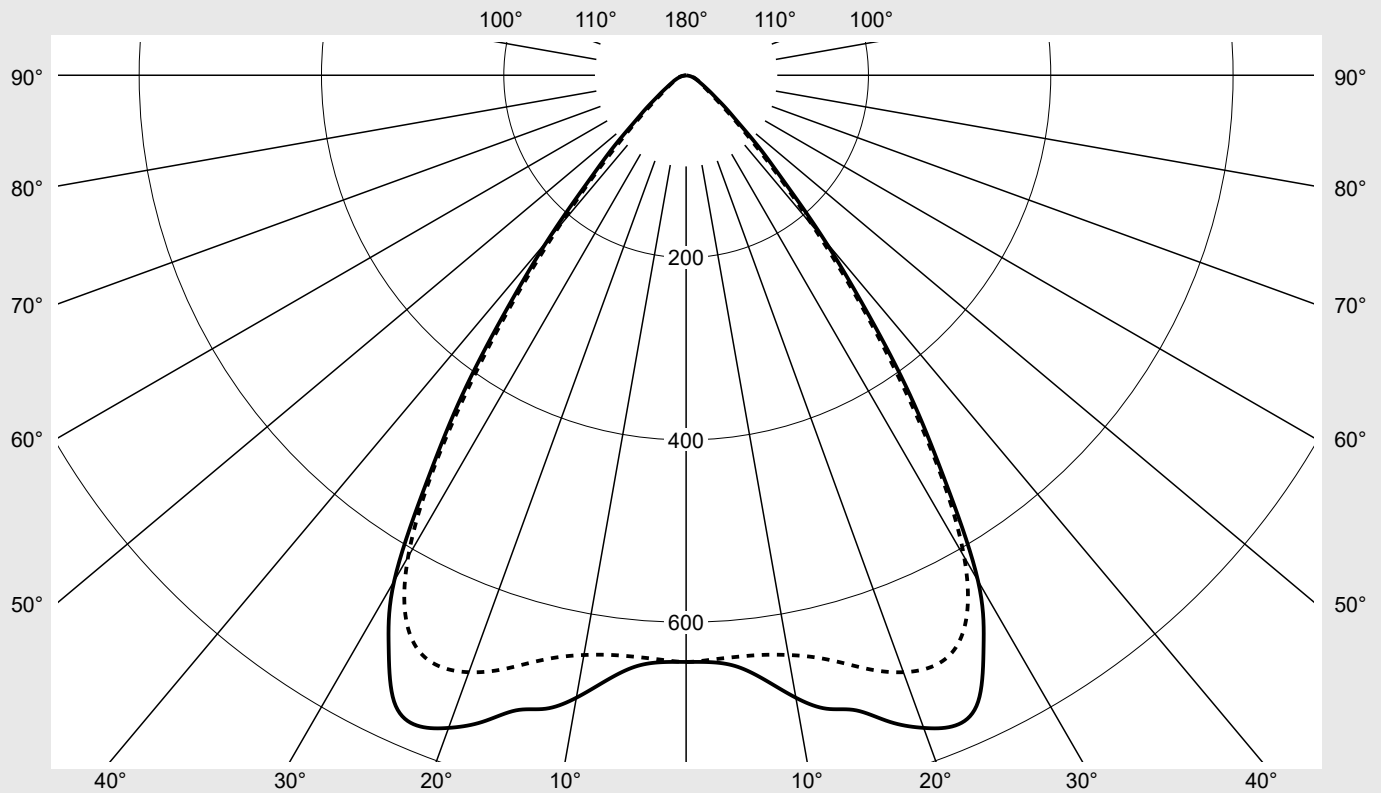

Classifications

DIN 5040 A 6 0
CIE N1=88 N2=98 N3=100
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 11	Order number: 51HN12DA6LLA EAN: 4069025424730	LP number 59710_408
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	643.6	643.6	643.6	643.6	643.6	643.6	643.6	1.0	1.0
2,5°	644.5	645.1	645.0	644.3	644.2	643.7	641.7	7.7	8.7
5,0°	651.5	652.3	650.7	647.5	645.3	643.2	640.4	15.5	24.1
7,5°	669.6	669.1	664.2	657.2	651.2	645.8	641.3	23.5	47.6
10,0°	693.4	691.0	681.5	670.0	659.9	651.2	645.8	31.9	79.6
12,5°	711.8	709.4	700.3	685.9	671.9	660.7	654.0	40.7	120.2
15,0°	721.3	721.7	717.1	704.9	689.4	675.9	667.7	49.7	169.9
17,5°	743.8	740.8	737.9	726.5	708.9	693.0	684.2	59.4	229.3
20,0°	761.9	761.9	759.6	745.2	724.0	705.6	696.8	69.2	298.5
22,5°	772.0	771.2	770.0	754.7	731.1	710.8	702.6	78.2	376.7
25,0°	758.1	756.6	756.3	743.6	722.7	703.3	695.6	85.1	461.8
27,5°	706.7	709.5	709.5	700.0	685.7	672.3	667.0	87.8	549.7
30,0°	640.4	635.6	633.7	626.6	621.7	614.1	609.9	85.8	635.5
32,5°	530.6	537.6	535.6	526.2	530.2	524.1	520.8	78.1	713.6
35,0°	428.2	426.4	425.9	411.9	420.8	414.2	411.4	66.0	779.6
37,5°	322.5	323.4	327.0	311.0	319.4	310.8	308.2	53.0	832.6
40,0°	236.1	234.0	241.6	230.8	230.9	219.8	218.4	40.7	873.3
42,5°	162.3	165.3	172.9	171.1	161.7	151.3	150.8	30.2	903.5
45,0°	117.3	114.9	119.4	122.5	109.3	102.6	102.3	21.9	925.4
47,5°	80.5	81.4	82.8	85.5	75.2	71.4	70.8	15.9	941.3
50,0°	59.4	58.0	58.0	59.0	52.9	50.5	49.6	11.7	953.0
52,5°	43.3	42.8	42.8	43.0	39.3	37.2	36.6	8.9	961.8
55,0°	33.3	32.4	32.9	33.7	30.5	28.7	28.3	7.1	968.9
57,5°	25.9	25.4	25.9	26.8	24.5	22.9	22.9	5.8	974.7
60,0°	20.9	20.2	21.2	21.8	20.4	18.9	19.2	4.9	979.5
62,5°	16.9	16.2	17.4	18.0	17.2	15.9	16.4	4.1	983.6
65,0°	14.9	13.6	14.4	15.1	14.8	13.6	14.4	3.6	987.2
67,5°	12.3	11.4	12.5	12.4	13.0	11.7	12.6	3.1	990.3
70,0°	10.4	9.5	10.5	10.1	11.1	10.1	11.0	2.7	993.0
72,5°	8.2	7.7	7.9	8.2	8.7	8.6	9.5	2.2	995.2
75,0°	6.5	6.0	6.0	6.4	6.6	7.1	7.9	1.7	996.9
77,5°	4.5	4.3	4.4	4.7	5.1	5.6	6.3	1.3	998.2
80,0°	2.9	2.7	2.9	3.1	3.5	4.1	4.7	0.9	999.1
82,5°	1.3	1.4	1.6	1.8	2.2	2.7	3.3	0.5	999.7
85,0°	0.6	0.6	0.6	0.7	1.0	1.4	1.8	0.3	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Highbay 11			Order number: 51HN12DA6LLA EAN: 4069025424730							LP number 59710_408	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	21.9	23.2	22.3	23.5	23.8	21.6	22.9	22.0	23.2	23.5
	3H	21.9	23.0	22.3	23.4	23.7	21.6	22.8	22.0	23.1	23.5
	4H	21.9	22.9	22.3	23.3	23.7	21.7	22.7	22.1	23.0	23.4
	6H	21.9	22.8	22.3	23.2	23.6	21.7	22.6	22.1	23.0	23.4
	8H	21.9	22.7	22.4	23.1	23.5	21.8	22.6	22.2	23.0	23.4
	12H	21.9	22.6	22.4	23.0	23.5	21.8	22.5	22.2	22.9	23.3
4H	2H	21.8	22.8	22.2	23.2	23.6	21.5	22.6	21.9	22.9	23.3
	3H	21.8	22.7	22.3	23.1	23.5	21.6	22.4	22.0	22.8	23.2
	4H	21.8	22.6	22.3	23.0	23.5	21.6	22.4	22.1	22.8	23.2
	6H	21.8	22.5	22.3	22.9	23.4	21.7	22.3	22.1	22.8	23.2
	8H	21.8	22.4	22.3	22.8	23.3	21.7	22.3	22.2	22.7	23.2
	12H	21.8	22.3	22.3	22.7	23.2	21.7	22.2	22.2	22.7	23.2
8H	4H	21.8	22.4	22.2	22.8	23.3	21.6	22.1	22.0	22.6	23.1
	6H	21.7	22.2	22.2	22.7	23.2	21.6	22.1	22.1	22.6	23.1
	8H	21.7	22.1	22.2	22.6	23.1	21.6	22.0	22.1	22.5	23.1
	12H	21.7	22.0	22.2	22.5	23.1	21.7	22.0	22.2	22.5	23.0
12H	4H	21.8	22.3	22.3	22.7	23.2	21.6	22.0	22.1	22.5	23.0
	6H	21.8	22.1	22.3	22.6	23.1	21.6	22.0	22.1	22.5	23.0
	8H	21.7	22.0	22.2	22.5	23.1	21.6	22.0	22.2	22.5	23.0

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 426 B = 264	
C-planes	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
	γ	Luminance in cd/m²					
45,0°	39155.5	38340.2	39854.0	40875.6	36466.6	34238.6	34137.8
50,0°	21816.0	21300.1	21277.8	21657.7	19434.4	18530.2	18212.2
55,0°	13710.1	13343.5	13534.0	13844.6	12558.9	11805.6	11663.6
60,0°	9860.9	9519.2	10002.1	10302.2	9645.7	8932.6	9046.3
65,0°	8320.6	7569.0	8067.6	8415.5	8240.7	7620.9	8051.5
70,0°	7151.6	6525.1	7217.9	6983.3	7660.8	6973.6	7616.0
75,0°	5893.8	5458.8	5444.3	5822.6	6049.7	6475.5	7218.6
80,0°	3979.1	3712.8	3928.8	4244.1	4790.4	5634.4	6422.6
85,0°	1589.4	1581.3	1632.7	1911.6	2826.8	3766.3	4879.2

Photometric test report

Family
Highbay 11

Order number: 51HN12DA6LLA
EAN: 4069025424730

LP number
59710_408

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

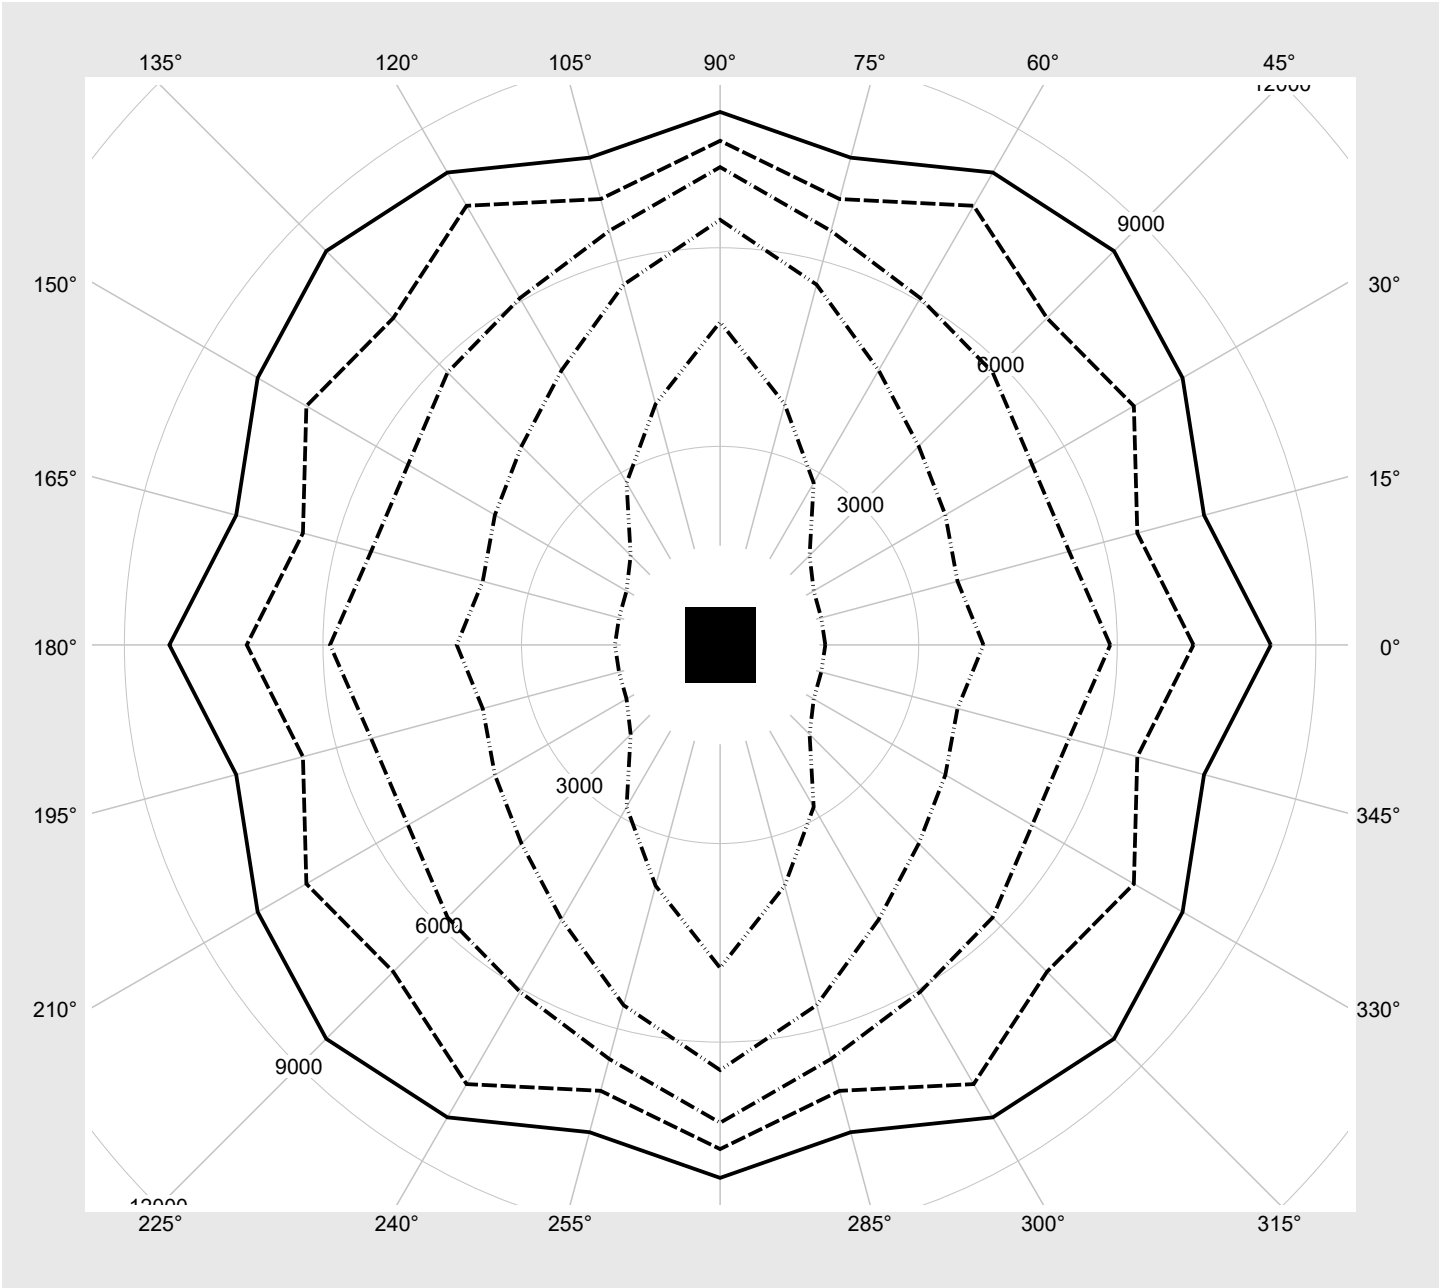

Photometric test report

Family Highbay 11	Order number: 51HN12DA6LLA EAN: 4069025424730	LP number 59710_408
Dimming levels table		environmental temperature: 25°C



Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	26540	146.7
95	240	252	25204	138.3
90	226	250	23841	129.7
85	213	248	22569	121.9
80	199	245	21187	113.6
75	186	243	19894	105.9
70	173	240	18588	98.3
65	160	237	17272	90.7
60	147	234	15936	83.1
55	134	231	14598	75.6
50	121	227	13240	68.3
45	109	223	11975	61.5
40	96	218	10598	54.0
35	84	213	9309	47.3
30	72	208	8012	40.6
25	59	201	6590	33.5
20	47	192	5267	27.0
15	35	181	3927	20.6
10	24	168	2691	14.6
5	12	142	1328	7.8
2	5	110	525	3.9