

Photometric test report

Family
Silica® 21 Floor



Order number: 51MX56DA3ZM00890XX
EAN: 4069025333889

Version

Lamps

Controlgear

Setting

Rated values

floorstanding uplight, reflector, white, indirect-/direct distribution, wide distribution, with presence- and daylightsensor

LED 3000 K | CRI ≥ 80

ECG-DALI


individual position: only indirect light

Net luminous flux = 10000 lm
Power consumption = 64.1 W
Luminous efficacy = 156 lm/W

LP number
59648_6

serial
documentation
09.04.2025

siteco

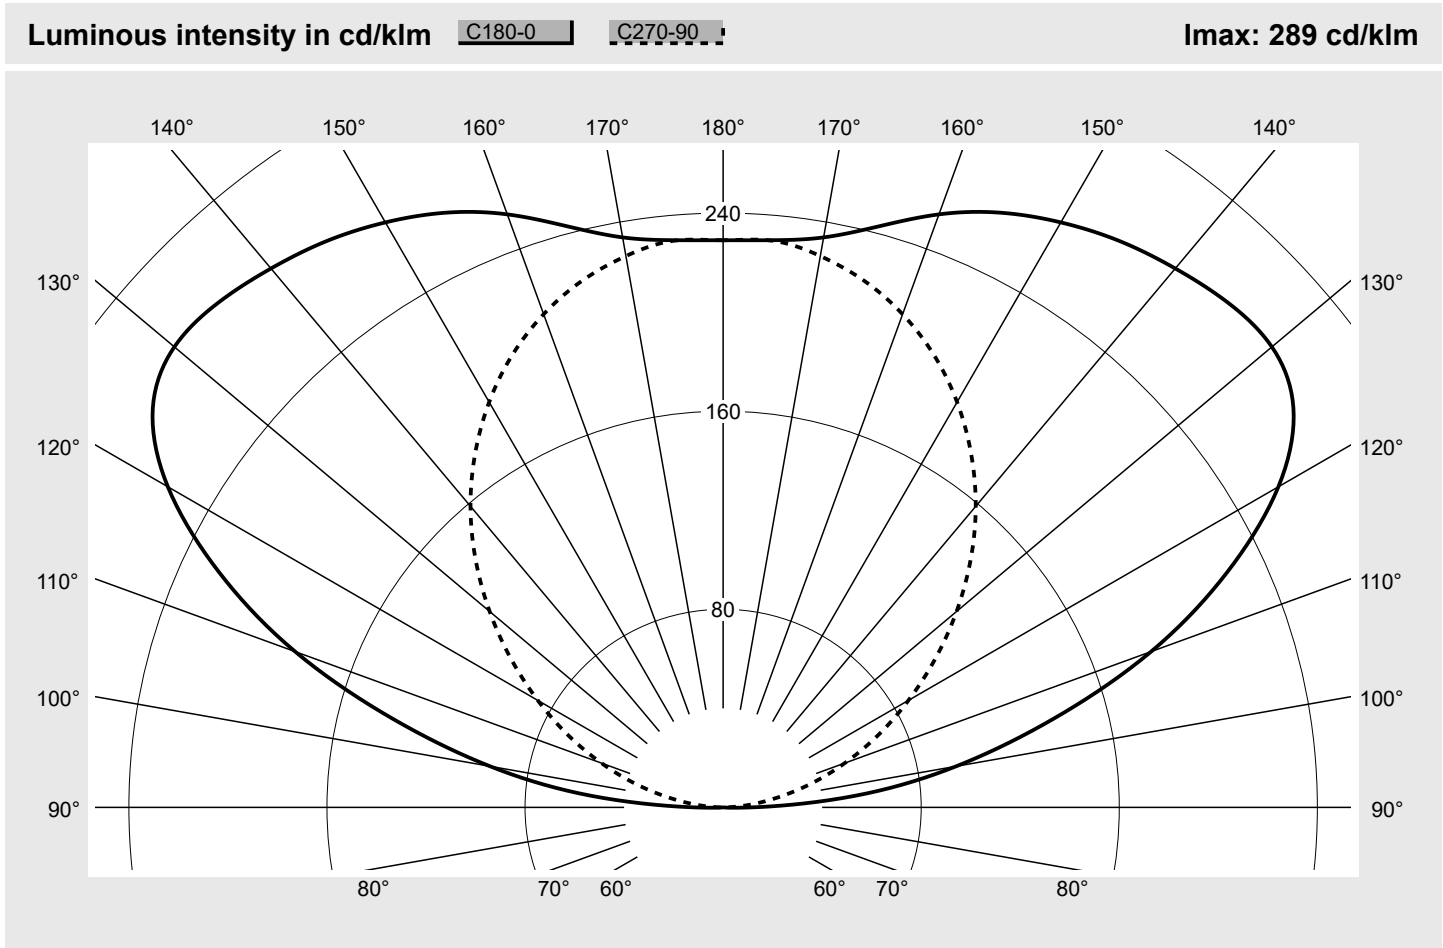

Classifications		Luminaire light output ratios	
DIN 5040	E 1 2	η_{LB}	100.0%
CIE	N1=0 N2=0 N3=0	ϕ_u	0.3%
	N4=0 N5=100	ϕ_o	99.7%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 Floor	Order number: 51MX56DA3ZM00890XX EAN: 4069025333889	LP number 59648_6
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
15°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.9	0.9	0.9	0.8	0.7	0.7	0.7	0.4	0.4
90°	11.5	11.2	11.8	11.6	6.9	2.4	0.9	4.6	5.0
95°	53.3	54.6	58.7	55.5	35.6	18.2	9.4	23.1	28.1
100°	95.6	98.1	99.0	86.8	58.3	33.0	21.6	39.0	67.1
105°	138.1	140.4	137.2	117.3	80.1	49.7	36.5	54.0	121.1
110°	184.0	185.7	173.9	143.9	103.1	67.2	52.3	68.0	189.1
115°	224.6	223.0	205.9	169.1	125.1	85.0	69.1	79.1	268.2
120°	259.0	254.8	232.1	190.2	145.4	102.1	86.4	86.8	355.0
125°	281.2	275.1	248.8	207.4	162.0	118.7	104.6	90.2	445.2
130°	289.3	283.0	256.4	219.1	175.3	134.9	123.1	89.2	534.4
135°	288.3	283.0	259.3	227.1	186.9	150.6	141.4	85.4	619.8
140°	284.1	280.3	260.5	231.9	196.2	165.7	158.7	79.6	699.4
145°	279.2	276.5	259.8	234.5	203.5	179.7	174.6	72.4	771.8
150°	272.8	270.9	256.5	235.2	209.8	192.5	189.0	63.8	835.5
155°	265.0	263.6	251.0	233.7	215.0	203.7	201.5	54.1	889.6
160°	254.9	254.0	243.6	231.0	219.4	213.1	211.9	43.6	933.2
165°	242.9	242.8	235.7	229.0	223.3	220.4	220.2	32.7	965.9
170°	233.7	234.5	230.6	228.3	226.5	225.7	226.1	21.8	987.7
175°	229.9	230.9	228.6	228.5	228.4	228.9	229.7	10.9	998.6
180°	229.0	229.0	229.0	229.0	229.0	229.0	229.0	1.4	1000.0

Photometric test report

Family Silica® 21 Floor	Order number: 51MX56DA3ZM00890XX EAN: 4069025333889	LP number 59648_6
UGR-Table	Standard room	siteco

The UGR formula for this luminaire type cannot be used, see LiTG Publication 20:
"The UGR - Process for Evaluation of Direct Glare of Artificial Lighting in Indoor Rooms"

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1176 B = 49
-----------------	---------------------------------	----------------------------------	--------------------

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	1847.8	1794.0	1704.4	1545.1	1403.7	1314.1	1314.1

Photometric test report

Family
Silica® 21 Floor

Order number: 51MX56DA3ZM00890XX
EAN: 4069025333889

LP number
59648_6

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

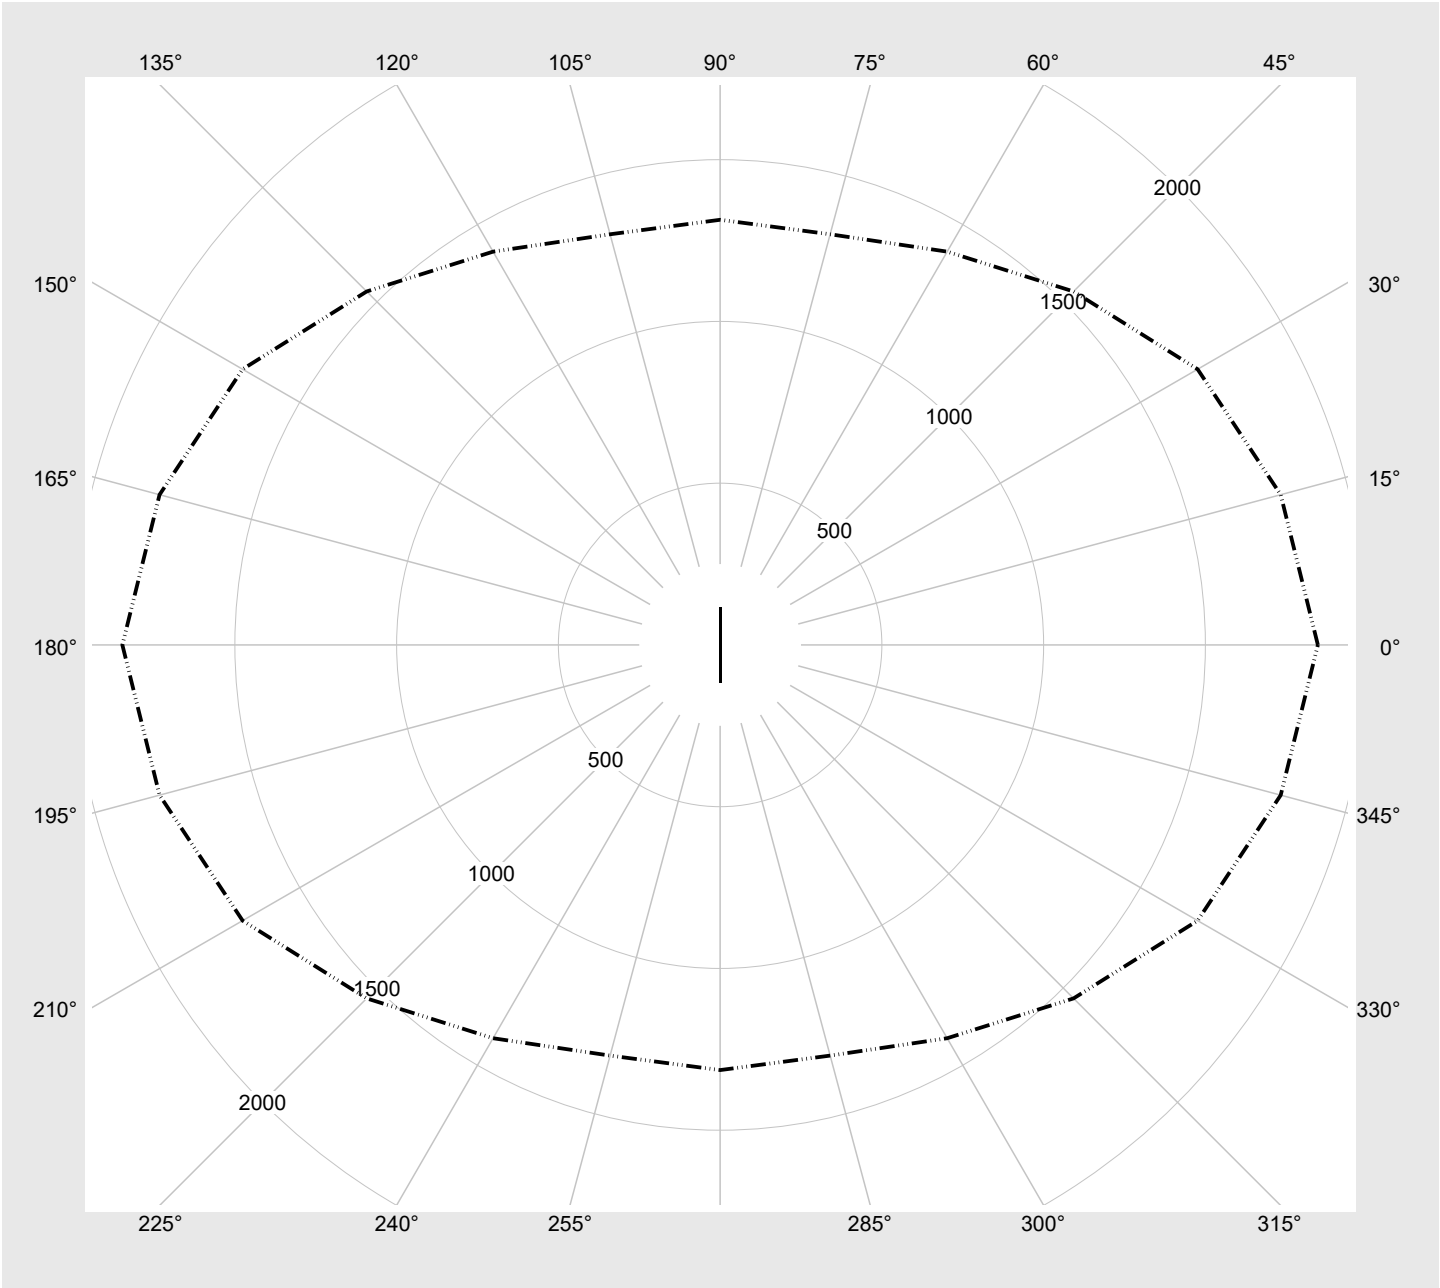

Photometric test report

Family Silica® 21 Floor	Order number: 51MX56DA3ZM00890XX EAN: 4069025333889	LP number 59648_6
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	10000	64.1
95	240	252	9490	60.7
90	227	250	9010	57.3
85	213	248	8490	53.8
80	200	245	8002	50.5
75	187	243	7510	47.4
70	174	240	7015	44.1
65	161	237	6515	40.9
60	148	234	6010	37.7
55	135	231	5501	34.5
50	122	227	4988	31.3
45	110	223	4512	28.4
40	97	219	3989	25.4
35	85	214	3505	22.5
30	73	208	3017	19.6
25	60	201	2483	16.5
20	48	193	1990	13.9
15	36	182	1493	11.2
10	24	168	993	8.4
5	12	142	488	5.2
2	4	102	151	3.2