



Photometric test report

Family Highbay 11	Order number: 51HN11DA3LDA EAN: 4069025424075	LP number 59711_470
	Version	primary light control with lens, PMMA, housing, white, narrow distribution
	Lamps	LED 3000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Setting	AC-mode
	Rated values	Net luminous flux = 26560 lm Power consumption = 146.7 W Luminous efficacy = 181 lm/W
		serial documentation 26.05.2025
		

Luminous intensity in cd/klm
C180-0
C270-90
Imax: 2679 cd/klm



Classifications	
DIN 5040	A 7 0
CIE	N1=85 N2=97 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 11	Order number: 51HN11DA3LDA EAN: 4069025424075	LP number 59711_470
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0,0°	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	4.0	4.0
2,5°	2608.0	2619.4	2619.4	2616.5	2617.6	2616.2	2606.1	31.3	35.3
5,0°	2420.1	2415.7	2414.1	2408.4	2406.6	2402.3	2391.7	57.6	92.8
7,5°	2113.4	2116.1	2112.3	2103.0	2097.6	2090.5	2079.6	75.2	168.1
10,0°	1780.1	1768.7	1762.7	1751.6	1743.6	1735.2	1724.7	83.4	251.5
12,5°	1410.1	1409.3	1404.7	1395.9	1388.1	1380.5	1373.1	82.8	334.3
15,0°	1106.5	1097.8	1095.0	1089.4	1083.1	1078.4	1073.9	77.3	411.5
17,5°	830.1	840.2	835.5	831.1	826.6	824.9	824.1	68.5	480.0
20,0°	671.1	661.9	651.8	643.2	639.9	639.4	641.0	60.8	540.8
22,5°	531.9	530.5	514.2	498.9	497.0	496.6	496.8	53.4	594.2
25,0°	450.6	441.3	420.6	401.3	399.0	395.8	392.4	47.9	642.1
27,5°	370.8	368.7	351.4	331.7	326.8	321.1	316.0	43.1	685.2
30,0°	320.4	312.1	300.8	284.1	278.0	270.2	264.7	39.7	724.9
32,5°	271.0	266.8	259.0	245.6	238.0	229.0	224.7	36.5	761.4
35,0°	235.8	228.9	222.7	210.5	201.6	193.0	191.7	33.3	794.7
37,5°	204.4	197.8	191.5	181.1	172.0	164.3	162.4	30.3	825.0
40,0°	176.7	170.7	163.1	154.3	146.1	138.3	135.6	27.3	852.2
42,5°	147.6	145.5	138.6	130.6	123.2	115.8	113.3	24.2	876.4
45,0°	126.0	121.8	116.3	109.0	102.0	95.3	93.2	21.1	897.6
47,5°	103.2	101.5	97.1	90.9	84.6	78.4	76.7	18.3	915.9
50,0°	85.9	82.9	79.4	74.6	69.1	63.7	61.9	15.5	931.4
52,5°	69.0	67.2	64.5	61.0	56.2	51.6	49.7	13.0	944.4
55,0°	55.6	54.1	52.2	49.5	45.7	41.7	40.0	10.9	955.3
57,5°	43.6	43.1	41.8	39.8	37.0	33.6	32.2	9.0	964.3
60,0°	33.2	33.3	33.9	32.4	30.5	27.5	26.1	7.4	971.7
62,5°	25.9	26.0	27.0	26.2	25.1	22.4	21.3	6.1	977.8
65,0°	21.6	21.2	21.7	21.3	20.9	18.8	17.7	5.1	982.9
67,5°	17.0	17.1	17.8	17.0	17.3	15.6	14.8	4.3	987.2
70,0°	13.5	13.4	14.4	13.6	14.1	13.0	12.4	3.5	990.7
72,5°	11.0	10.8	10.9	10.9	11.0	10.7	10.6	2.8	993.5
75,0°	9.0	8.4	8.4	8.3	8.6	9.0	8.9	2.3	995.8
77,5°	6.6	6.4	6.2	6.2	6.6	7.3	7.4	1.8	997.5
80,0°	4.4	4.2	4.1	4.2	4.7	5.7	5.8	1.3	998.8
82,5°	2.0	2.1	2.2	2.4	3.0	3.9	4.1	0.8	999.6
85,0°	0.8	0.8	0.8	1.0	1.5	2.2	2.4	0.4	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Highbay 11	Order number: 51HN11DA3LDA EAN: 4069025424075	LP number 59711_470
----------------------	--	------------------------

UGR-Table	Standard room	siteco	
-----------	---------------	--------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.9	22.1	21.2	22.4	22.7	19.7	20.9	20.0	21.2	21.5
	3H	21.1	22.1	21.5	22.5	22.8	20.0	21.0	20.4	21.3	21.7
	4H	21.2	22.1	21.6	22.5	22.9	20.1	21.1	20.5	21.4	21.8
	6H	21.2	22.1	21.7	22.4	22.8	20.3	21.1	20.7	21.5	21.9
	8H	21.3	22.0	21.7	22.4	22.8	20.4	21.1	20.8	21.5	21.9
	12H	21.3	21.9	21.7	22.3	22.7	20.4	21.1	20.8	21.4	21.9
4H	2H	20.9	21.9	21.3	22.2	22.6	19.9	20.8	20.3	21.2	21.6
	3H	21.3	22.0	21.7	22.4	22.9	20.3	21.1	20.7	21.5	21.9
	4H	21.4	22.1	21.8	22.5	22.9	20.5	21.2	20.9	21.6	22.0
	6H	21.4	22.0	21.9	22.5	22.9	20.7	21.3	21.1	21.7	22.2
	8H	21.4	22.0	21.9	22.4	22.9	20.8	21.3	21.2	21.7	22.2
	12H	21.4	21.9	21.9	22.3	22.8	20.8	21.2	21.3	21.7	22.2
8H	4H	21.4	21.9	21.8	22.3	22.8	20.5	21.0	21.0	21.5	22.0
	6H	21.4	21.9	21.9	22.3	22.9	20.7	21.2	21.2	21.6	22.1
	8H	21.4	21.8	21.9	22.3	22.8	20.8	21.2	21.3	21.7	22.2
	12H	21.4	21.7	21.9	22.2	22.8	20.9	21.2	21.4	21.7	22.3
12H	4H	21.3	21.8	21.8	22.2	22.7	20.5	20.9	21.0	21.4	21.9
	6H	21.4	21.8	21.9	22.3	22.8	20.7	21.1	21.2	21.6	22.1
	8H	21.4	21.7	21.9	22.2	22.8	20.8	21.1	21.3	21.6	22.2


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 426 B = 264
-----------------	---------------------------------	-------------------------------	--------------------

C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m ²						
45,0°	42078.4	40673.6	38841.4	36411.9	34067.3	31838.6	31125.9
50,0°	31544.8	30446.6	29157.0	27425.8	25369.4	23388.4	22726.3
55,0°	22889.0	22269.4	21497.8	20381.1	18811.2	17170.4	16480.3
60,0°	15704.5	15721.5	16013.8	15299.7	14390.0	12982.9	12334.9
65,0°	12057.5	11854.1	12122.9	11926.7	11674.7	10491.7	9917.2
70,0°	9341.8	9229.2	9914.9	9363.2	9716.7	8945.4	8549.1
75,0°	8189.4	7685.7	7703.1	7599.0	7839.9	8174.8	8160.2
80,0°	5974.6	5752.9	5565.2	5665.8	6330.9	7688.2	7844.6
85,0°	2211.1	2184.0	2284.3	2582.3	3964.3	5836.7	6614.3

Photometric test report

Family Highbay 11	Order number: 51HN11DA3LDA EAN: 4069025424075	LP number 59711_470
-----------------------------	--	-------------------------------

Luminance values in cd/m²
γ 65°
γ 70°
γ 75°
γ 80°
γ 85°
siteco

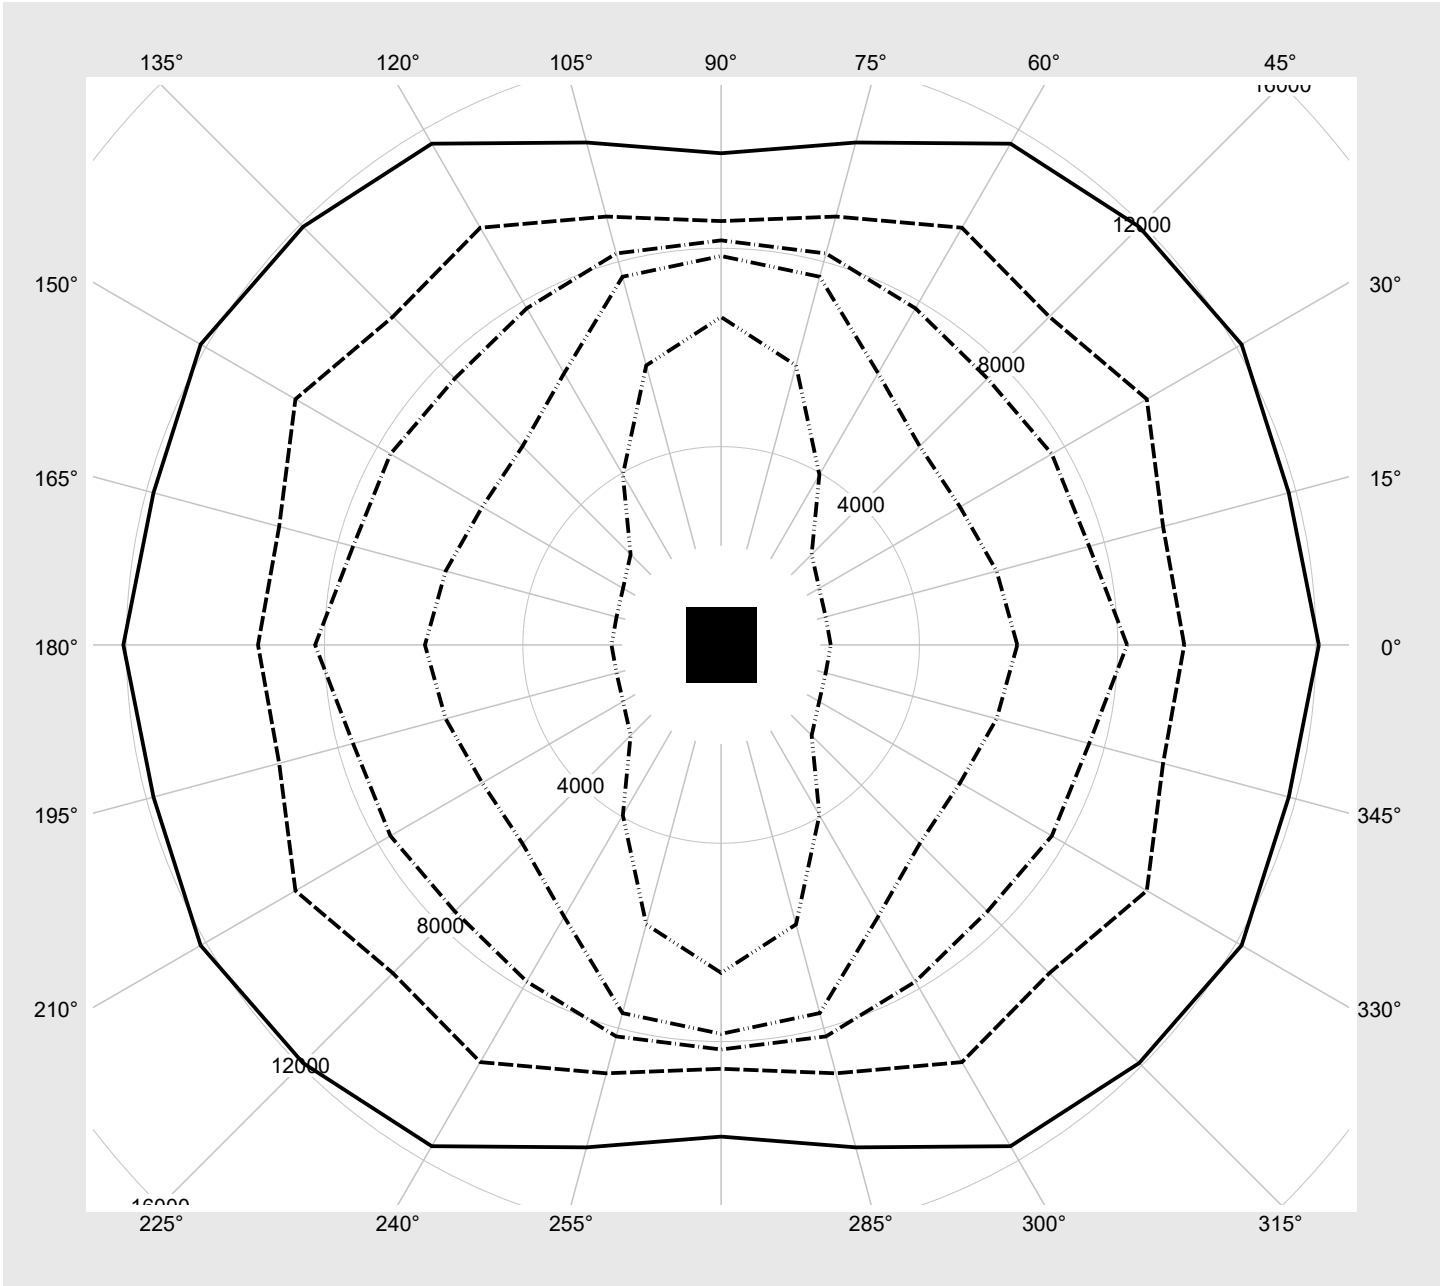

Photometric test report

Family Highbay 11	Order number: 51HN11DA3LDA EAN: 4069025424075	LP number 59711_470
----------------------	--	------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
----------------------	---------------------------------	--------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	26560	146.7
95	240	252	25227	138.3
90	226	250	23867	129.7
85	213	248	22597	121.9
80	199	245	21219	113.6
75	186	243	19927	105.9
70	173	240	18623	98.3
65	160	237	17309	90.7
60	147	234	15972	83.1
55	134	231	14635	75.6
50	121	227	13277	68.3
45	108	223	11902	60.9
40	96	218	10632	54.0
35	84	213	9341	47.3
30	71	207	7932	40.1
25	59	201	6615	33.5
20	47	192	5289	27.0
15	35	181	3944	20.6
10	24	168	2704	14.6
5	12	142	1335	7.8
2	5	110	528	3.9