


Photometric test report

Family Highbay 11	Order number: 51HN11DBDSDA EAN: 4069025444943	LP number 59711_457
	Version	primary light control with lens, PMMA, housing, white, narrow distribution
	Lamps	LED 4000 K CRI ≥ 90
	Controlgear	ECG-DALI
	Setting	DC mode (central or group accumulator) initial emergency light level
	Rated values	Net luminous flux = 8050 lm Power consumption = 43.0 W Luminous efficacy = 187.2 lm/W
		serial documentation 26.05.2025
		

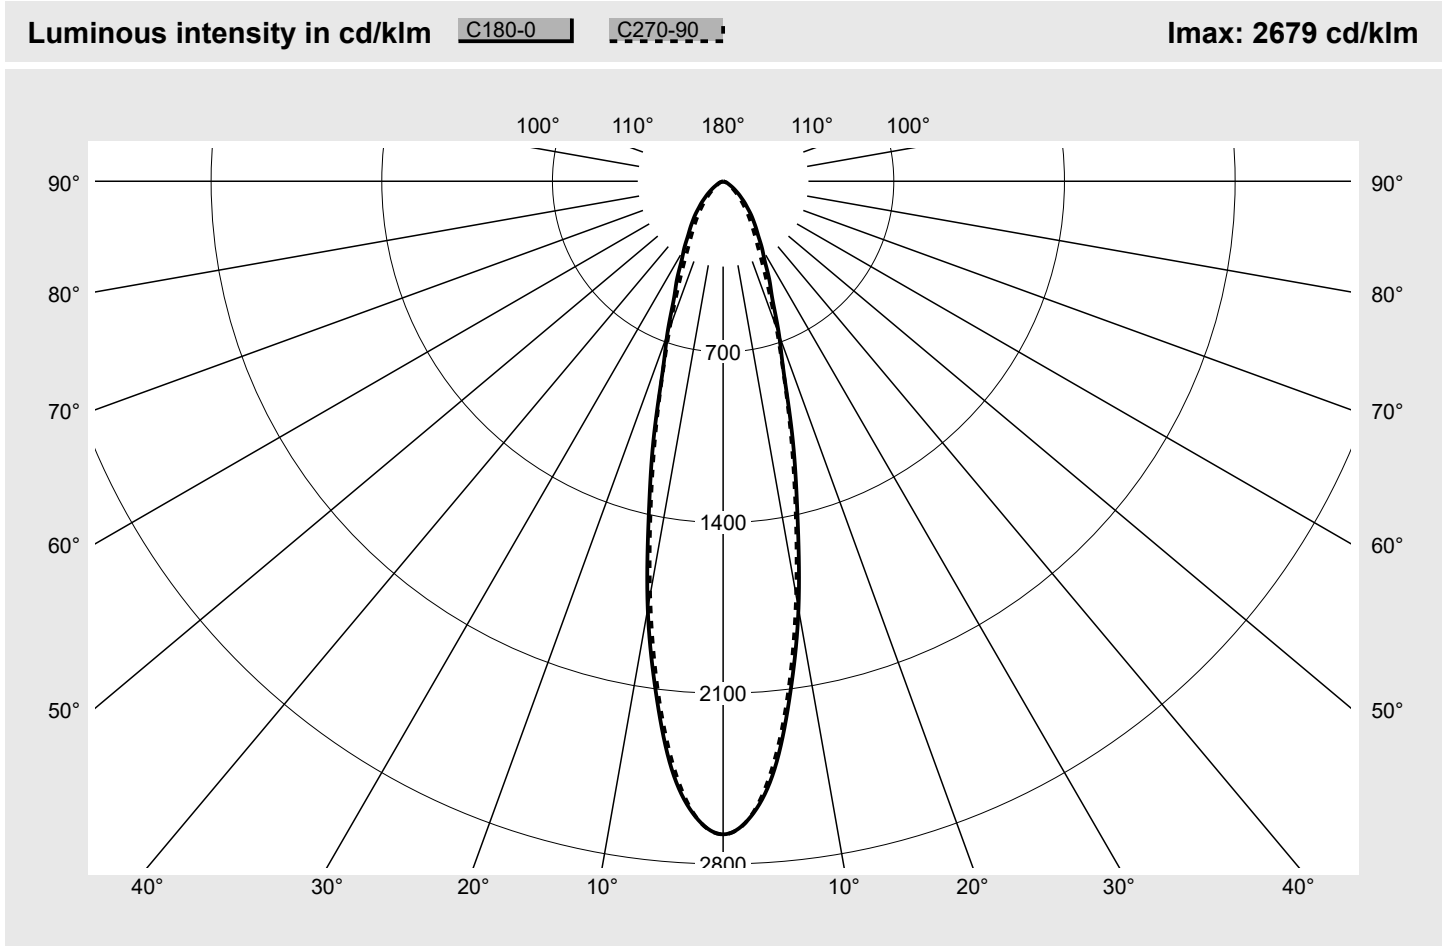

Classifications		Luminaire light output ratios	
DIN 5040	A 7 0	η_{LB}	100.0%
CIE	N1=85 N2=97 N3=100	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 11	Order number: 51HN11DBDSDA EAN: 4069025444943	LP number 59711_457
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	4.0	4.0
2,5°	2608.0	2619.4	2619.4	2616.5	2617.6	2616.2	2606.1	31.3	35.3
5,0°	2420.1	2415.7	2414.1	2408.4	2406.6	2402.3	2391.7	57.6	92.8
7,5°	2113.4	2116.1	2112.3	2103.0	2097.6	2090.5	2079.6	75.2	168.1
10,0°	1780.1	1768.7	1762.7	1751.6	1743.6	1735.2	1724.7	83.4	251.5
12,5°	1410.1	1409.3	1404.7	1395.9	1388.1	1380.5	1373.1	82.8	334.3
15,0°	1106.5	1097.8	1095.0	1089.4	1083.1	1078.4	1073.9	77.3	411.5
17,5°	830.1	840.2	835.5	831.1	826.6	824.9	824.1	68.5	480.0
20,0°	671.1	661.9	651.8	643.2	639.9	639.4	641.0	60.8	540.8
22,5°	531.9	530.5	514.2	498.9	497.0	496.6	496.8	53.4	594.2
25,0°	450.6	441.3	420.6	401.3	399.0	395.8	392.4	47.9	642.1
27,5°	370.8	368.7	351.4	331.7	326.8	321.1	316.0	43.1	685.2
30,0°	320.4	312.1	300.8	284.1	278.0	270.2	264.7	39.7	724.9
32,5°	271.0	266.8	259.0	245.6	238.0	229.0	224.7	36.5	761.4
35,0°	235.8	228.9	222.7	210.5	201.6	193.0	191.7	33.3	794.7
37,5°	204.4	197.8	191.5	181.1	172.0	164.3	162.4	30.3	825.0
40,0°	176.7	170.7	163.1	154.3	146.1	138.3	135.6	27.3	852.2
42,5°	147.6	145.5	138.6	130.6	123.2	115.8	113.3	24.2	876.4
45,0°	126.0	121.8	116.3	109.0	102.0	95.3	93.2	21.1	897.6
47,5°	103.2	101.5	97.1	90.9	84.6	78.4	76.7	18.3	915.9
50,0°	85.9	82.9	79.4	74.6	69.1	63.7	61.9	15.5	931.4
52,5°	69.0	67.2	64.5	61.0	56.2	51.6	49.7	13.0	944.4
55,0°	55.6	54.1	52.2	49.5	45.7	41.7	40.0	10.9	955.3
57,5°	43.6	43.1	41.8	39.8	37.0	33.6	32.2	9.0	964.3
60,0°	33.2	33.3	33.9	32.4	30.5	27.5	26.1	7.4	971.7
62,5°	25.9	26.0	27.0	26.2	25.1	22.4	21.3	6.1	977.8
65,0°	21.6	21.2	21.7	21.3	20.9	18.8	17.7	5.1	982.9
67,5°	17.0	17.1	17.8	17.0	17.3	15.6	14.8	4.3	987.2
70,0°	13.5	13.4	14.4	13.6	14.1	13.0	12.4	3.5	990.7
72,5°	11.0	10.8	10.9	10.9	11.0	10.7	10.6	2.8	993.5
75,0°	9.0	8.4	8.4	8.3	8.6	9.0	8.9	2.3	995.8
77,5°	6.6	6.4	6.2	6.2	6.6	7.3	7.4	1.8	997.5
80,0°	4.4	4.2	4.1	4.2	4.7	5.7	5.8	1.3	998.8
82,5°	2.0	2.1	2.2	2.4	3.0	3.9	4.1	0.8	999.6
85,0°	0.8	0.8	0.8	1.0	1.5	2.2	2.4	0.4	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Highbay 11	Order number: 51HN11DBDSDA EAN: 4069025444943	LP number 59711_457
UGR-Table	Standard room	siteco

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	14.3	15.5	14.7	15.8	16.1	13.1	14.3	13.5	14.6	14.9
	3H	14.6	15.6	14.9	15.9	16.3	13.4	14.5	13.8	14.8	15.1
	4H	14.6	15.6	15.0	15.9	16.3	13.6	14.5	14.0	14.9	15.2
	6H	14.7	15.5	15.1	15.9	16.3	13.7	14.5	14.1	14.9	15.3
	8H	14.7	15.5	15.2	15.8	16.2	13.8	14.5	14.2	14.9	15.3
	12H	14.7	15.4	15.1	15.8	16.2	13.8	14.5	14.3	14.9	15.3
4H	2H	14.4	15.3	14.8	15.7	16.1	13.3	14.3	13.7	14.6	15.0
	3H	14.7	15.5	15.1	15.9	16.3	13.7	14.5	14.2	14.9	15.3
	4H	14.8	15.5	15.3	15.9	16.4	13.9	14.6	14.4	15.0	15.5
	6H	14.9	15.5	15.4	15.9	16.4	14.1	14.7	14.6	15.1	15.6
	8H	14.9	15.4	15.4	15.8	16.3	14.2	14.7	14.7	15.2	15.7
	12H	14.9	15.3	15.4	15.8	16.3	14.3	14.7	14.7	15.2	15.7
8H	4H	14.8	15.3	15.3	15.8	16.3	13.9	14.5	14.4	14.9	15.4
	6H	14.9	15.3	15.4	15.8	16.3	14.2	14.6	14.7	15.1	15.6
	8H	14.9	15.2	15.4	15.7	16.3	14.3	14.6	14.8	15.1	15.7
	12H	14.8	15.1	15.4	15.6	16.2	14.4	14.6	14.9	15.2	15.7
12H	4H	14.8	15.2	15.3	15.7	16.2	13.9	14.4	14.4	14.8	15.3
	6H	14.9	15.2	15.4	15.7	16.2	14.2	14.5	14.7	15.0	15.5
	8H	14.9	15.2	15.4	15.7	16.2	14.3	14.6	14.8	15.1	15.6

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 852 B = 264
-----------------	---------------------------------	-------------------------------	--------------------

C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45,0°	6376.7	6163.8	5886.2	5518.0	5162.7	4824.9	4716.9
50,0°	4780.4	4614.0	4418.6	4156.2	3844.6	3544.4	3444.0
55,0°	3468.7	3374.8	3257.9	3088.6	2850.7	2602.1	2497.5
60,0°	2379.9	2382.5	2426.8	2318.6	2180.7	1967.5	1869.3
65,0°	1827.2	1796.4	1837.1	1807.4	1769.2	1590.0	1502.9
70,0°	1415.7	1398.6	1502.5	1418.9	1472.5	1355.6	1295.6
75,0°	1241.1	1164.7	1167.4	1151.6	1188.1	1238.8	1236.6
80,0°	905.4	871.8	843.4	858.6	959.4	1165.1	1188.8
85,0°	335.1	331.0	346.2	391.3	600.8	884.5	1002.4

Photometric test report

Family
Highbay 11

Order number: 51HN11DBDSDA
EAN: 4069025444943

LP number
59711_457

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

