Photometric test report

Family
Lunis 21

Order number: 51DB14EF25B1D
EAN: 4069025442673

LP number
59842_17


serial documentation
13.10.2025

Version	surface-mounted luminaire, cover opal, PMMA, diffuse beam
Lamps	LED 3000 K | CRI ≥ 90
Controlgear	ECG Multilumen
Setting	factory setting: DIP-Step=1
Rated values	Net luminous flux = 2120 lm Power consumption = 16.2 W Luminous efficacy = 130.9 lm/W

siteco

Luminous intensity in cd/klm C180-0

Imax: 437 cd/klm

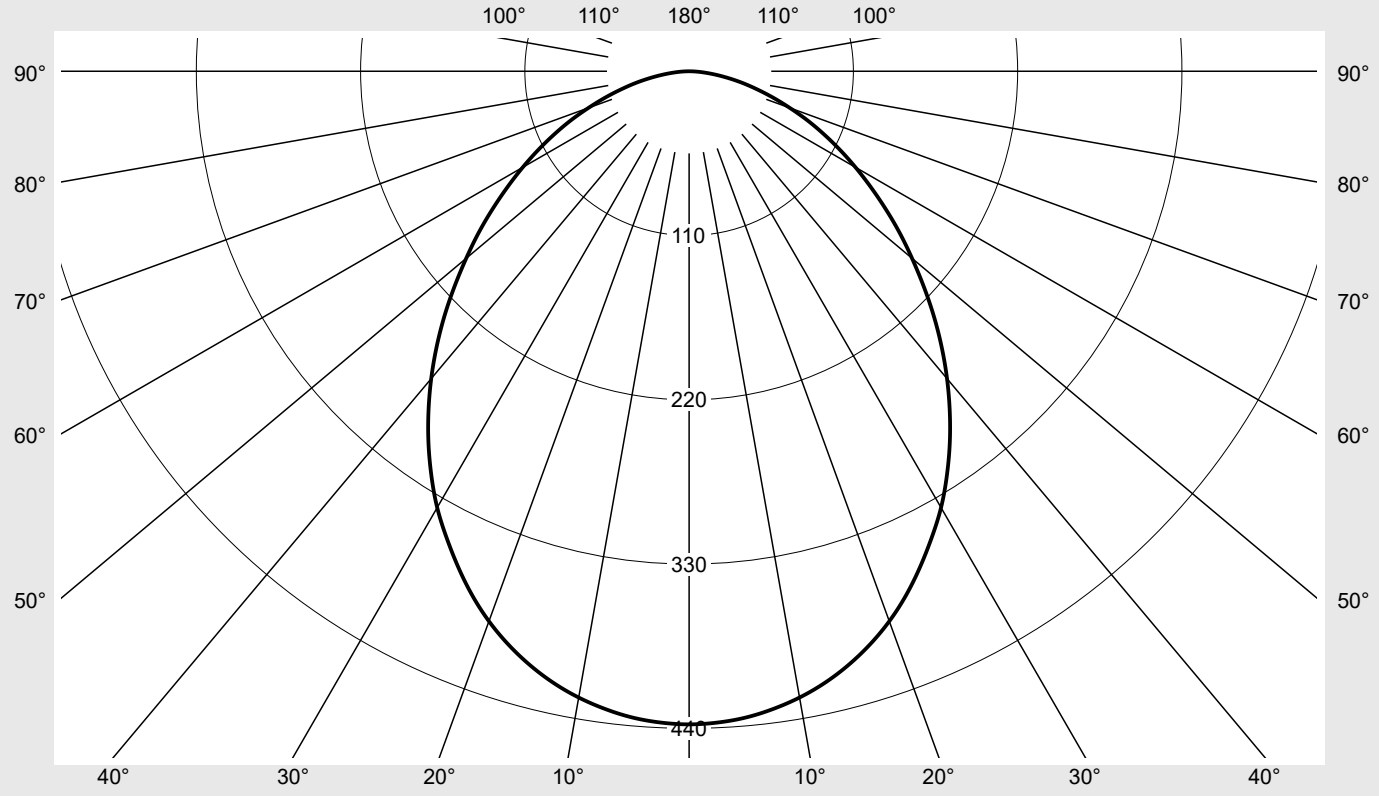

Classifications

DIN 5040	A 4 0
CIE	N1=54 N2=84 N3=97 N4=100 N5=100

Luminaire light output ratios

ηLB	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family	Order number: 51DB14EF25B1D	LP number
Lunis 21	EAN: 4069025442673	59842_17

siteco

Table of values for luminous intensities

Maximum luminous intensity

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	437.3	0.7	0.7
2,5°	436.5	5.2	5.9
5,0°	434.4	10.4	16.3
7,5°	430.7	15.4	31.7
10,0°	425.8	20.3	51.9
12,5°	419.5	24.9	76.8
15,0°	411.7	29.2	106.0
17,5°	402.5	33.2	139.2
20,0°	391.9	36.7	176.0
22,5°	379.7	39.8	215.8
25,0°	366.1	42.4	258.2
27,5°	351.9	44.5	302.8
30,0°	337.4	46.2	349.0
32,5°	321.2	47.3	396.3
35,0°	304.3	47.8	444.2
37,5°	286.7	47.8	492.0
40,0°	268.7	47.3	539.4
42,5°	250.3	46.4	585.7
45,0°	231.7	44.9	630.6
47,5°	213.0	43.0	673.7
50,0°	194.9	40.9	714.6
52,5°	177.7	38.6	753.2
55,0°	160.6	36.1	789.3
57,5°	144.1	33.3	822.6
60,0°	128.6	30.5	853.1
62,5°	113.7	27.7	880.8
65,0°	99.3	24.7	905.5
67,5°	85.5	21.7	927.1
70,0°	71.7	18.5	945.6
72,5°	59.2	15.5	961.1
75,0°	47.5	12.6	973.7
77,5°	37.1	9.9	983.6
80,0°	27.1	7.3	990.9
82,5°	18.2	4.9	995.9
85,0°	10.6	2.9	998.8
87,5°	4.4	1.2	1000.0
90,0°	0.1	0.0	1000.0

Photometric test report

Family	Order number: 51DB14EF25B1D	LP number
Lunis 21	EAN: 4069025442673	59842_17

siteco

UGR-Table

Standard room

Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions			View crosswise (C0)					View endwise (C90)			
x	y										
2H	2H	23.0	24.6	23.3	24.9	25.2	23.0	24.6	23.3	24.9	25.2
	3H	24.2	25.7	24.6	26.0	26.4	24.2	25.7	24.6	26.0	26.4
	4H	24.7	26.0	25.1	26.4	26.8	24.7	26.0	25.1	26.4	26.8
	6H	25.0	26.3	25.4	26.6	27.0	25.0	26.3	25.4	26.6	27.0
	8H	25.2	26.3	25.6	26.7	27.1	25.2	26.3	25.6	26.7	27.1
	12H	25.2	26.3	25.7	26.7	27.1	25.2	26.3	25.7	26.7	27.1
4H	2H	23.6	25.0	24.0	25.3	25.7	23.6	25.0	24.0	25.3	25.7
	3H	25.0	26.2	25.4	26.6	27.0	25.0	26.2	25.4	26.6	27.0
	4H	25.6	26.6	26.0	27.0	27.5	25.6	26.6	26.0	27.0	27.5
	6H	26.0	26.9	26.5	27.3	27.8	26.0	26.9	26.5	27.3	27.8
	8H	26.2	27.0	26.6	27.4	27.9	26.2	27.0	26.6	27.4	27.9
	12H	26.3	27.0	26.8	27.4	27.9	26.3	27.0	26.8	27.4	27.9
8H	4H	25.8	26.7	26.3	27.1	27.6	25.8	26.7	26.3	27.1	27.6
	6H	26.4	27.0	26.9	27.5	28.0	26.4	27.0	26.9	27.5	28.0
	8H	26.6	27.2	27.1	27.6	28.2	26.6	27.2	27.1	27.6	28.2
	12H	26.7	27.2	27.2	27.7	28.2	26.7	27.2	27.2	27.7	28.2
12H	4H	25.9	26.6	26.4	27.1	27.5	25.9	26.6	26.4	27.1	27.5
	6H	26.4	27.0	26.9	27.5	28.0	26.4	27.0	26.9	27.5	28.0
	8H	26.6	27.1	27.2	27.6	28.2	26.6	27.1	27.2	27.6	28.2

Luminance table

Max. for $\gamma >= 65°$

Photometric dimensions in mm: D = 182


C-planes	0°
γ	Luminance in cd/m²
45,0°	26699.3
50,0°	24703.9
55,0°	22810.1
60,0°	20966.0
65,0°	19153.3
70,0°	17089.0
75,0°	14960.2
80,0°	12721.7
85,0°	9913.7

Photometric test report

Family	Order number: 51DB14EF25B1D	LP number
Lunis 21	**EAN: 4069025442673**	**59842_17**

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

siteco

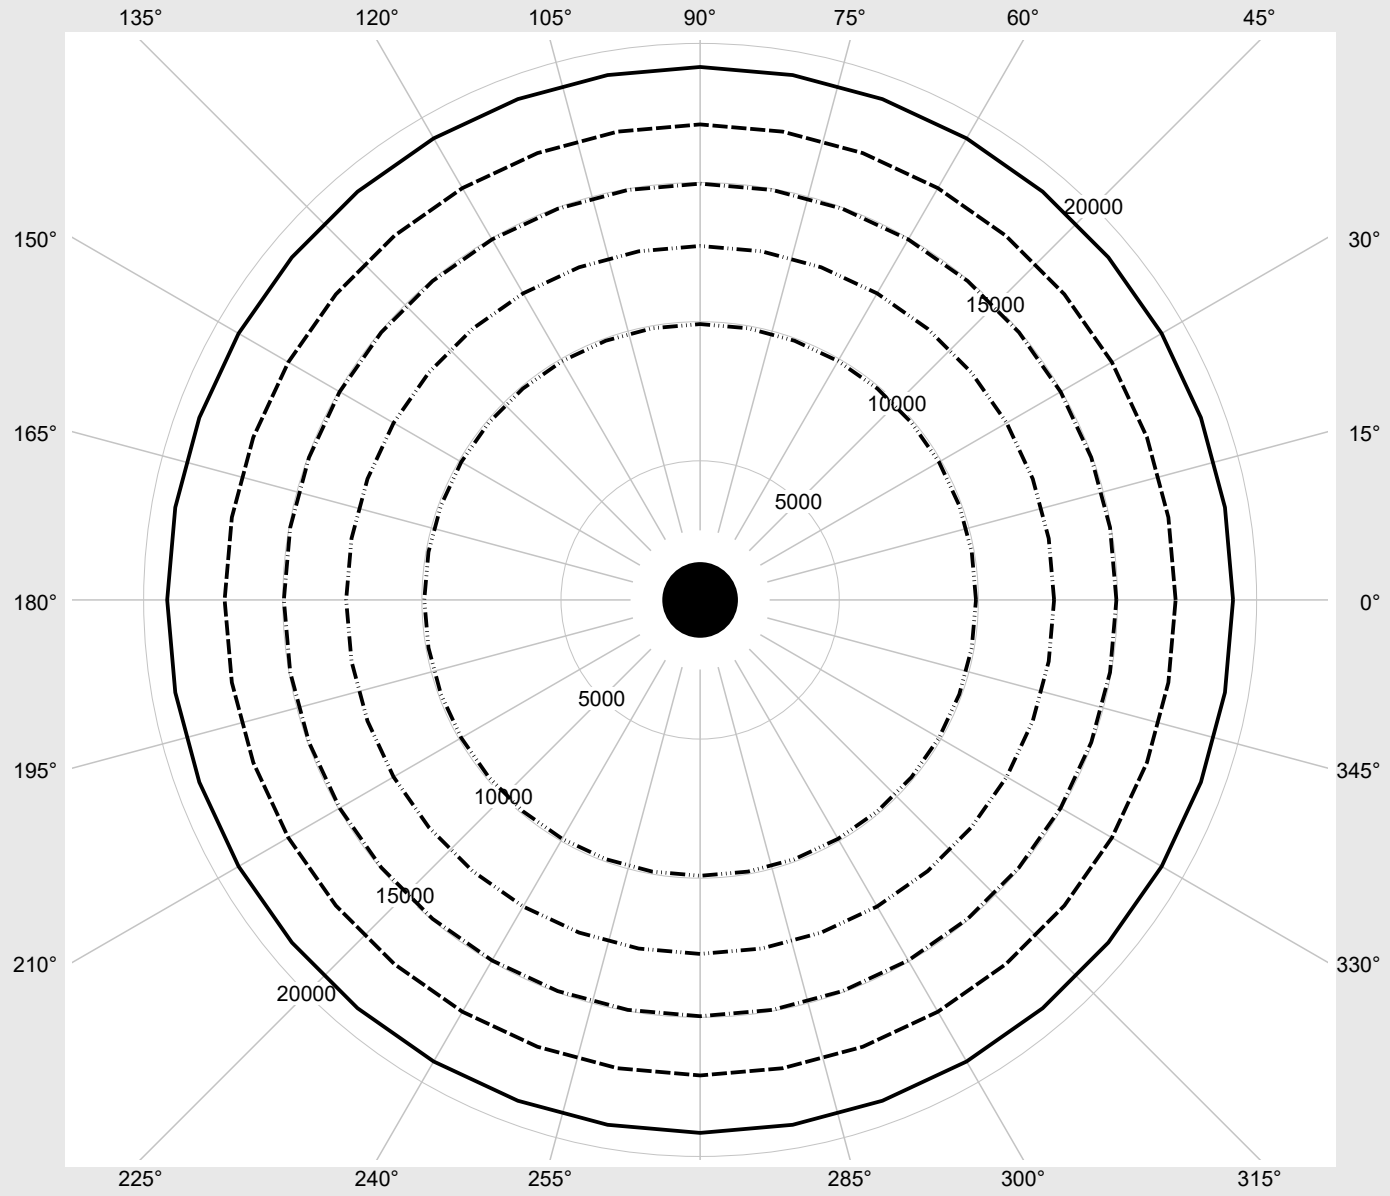

Photometric test report

Family	Order number: 51DB14EF25B1D	LP number
Lunis 21	**EAN: 4069025442673**	**59842_17**

siteco

Multilumen Table

environmental temperature: 25°C

DIP-Step	Switch Setting 1	2	3	Luminous flux [lm]	Power consumption [W]
7	ON	ON	ON	3600	27.9
6	ON	ON	OFF	3360	25.9
5	ON	OFF	ON	3120	23.8
4	ON	OFF	OFF	2870	22.0
3	OFF	ON	ON	2630	20.2
2	OFF	ON	OFF	2370	18.1
1	OFF	OFF	ON	2120	16.2
0	OFF	OFF	OFF	1860	14.3