Photometric test report

Family
Lunis 21



Order number: 51DB31EF21B1D
EAN: 4069025442772

LP number
59838_22


serial documentation
13.10.2025

Version	surface-mounted luminaire, Combined lens and reflector optics, reflector, aluminium, highly specular, rotationally symmetrical narrow distribution, UGR≤16 (L65≤3000cd/m²)
Lamps	LED 3000 K | CRI ≥ 90
Controlgear	ECG Multilumen
Setting	factory setting: DIP-Step=1
Rated values	Net luminous flux = 2580 lm Power consumption = 16.2 W Luminous efficacy = 159.3 lm/W

siteco

Luminous intensity in cd/klm C180-0

Imax: 2402 cd/klm

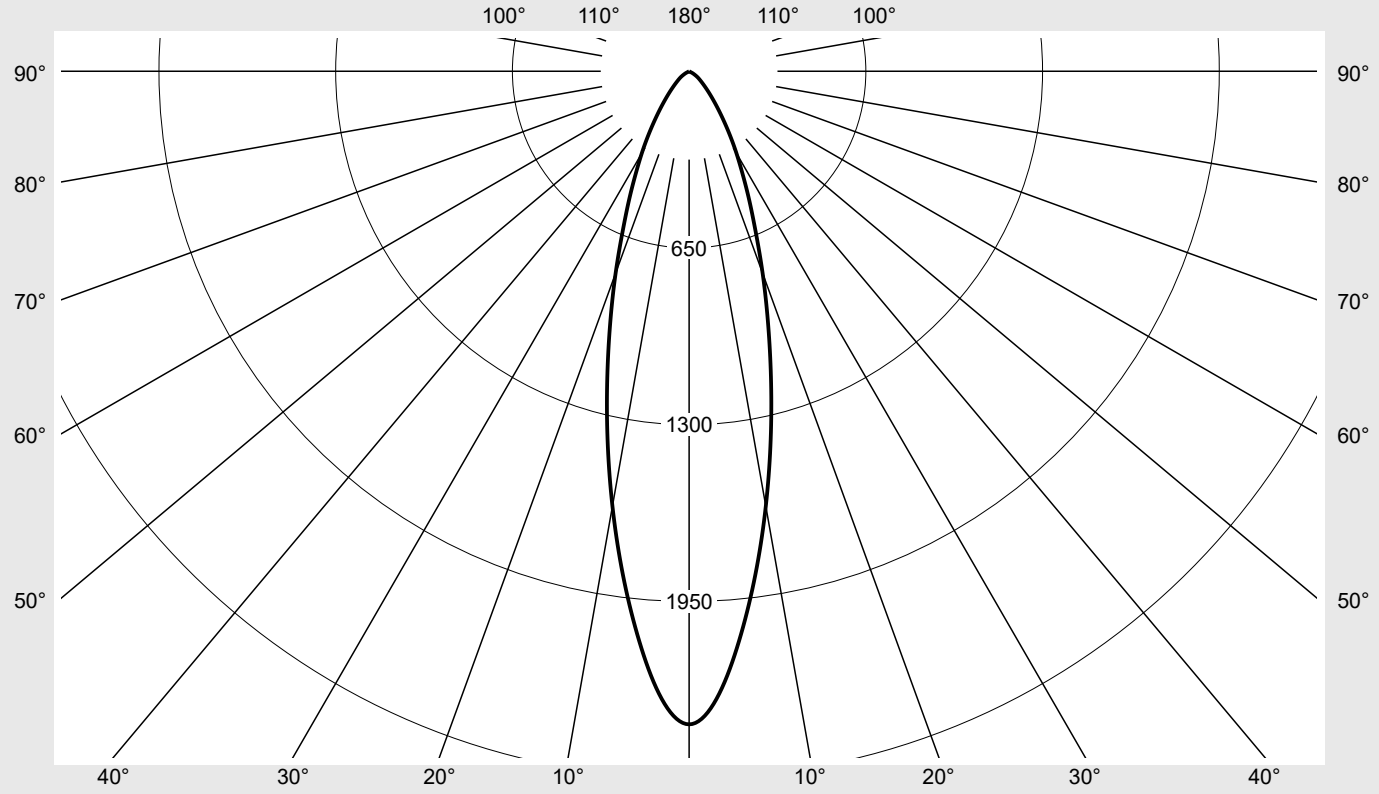

Classifications

DIN 5040	A 7 0
CIE	N1=90 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios

ηLB	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family	Order number: 51DB31EF21B1D	LP number
Lunis 21	EAN: 4069025442772	59838_22

siteco

Table of values for luminous intensities

Maximum luminous intensity

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2402.1	3.6	3.6
2,5°	2310.6	27.6	31.2
5,0°	2104.2	50.3	81.5
7,5°	1867.2	66.8	148.3
10,0°	1624.3	77.3	225.6
12,5°	1386.3	82.3	307.9
15,0°	1162.7	82.5	390.4
17,5°	963.2	79.4	469.8
20,0°	790.4	74.1	543.9
22,5°	640.3	67.2	611.1
25,0°	523.3	60.6	671.7
27,5°	425.8	53.9	725.6
30,0°	347.9	47.7	773.3
32,5°	279.9	41.2	814.5
35,0°	221.8	34.9	849.3
37,5°	175.4	29.3	878.6
40,0°	138.6	24.4	903.0
42,5°	110.0	20.4	923.4
45,0°	87.3	16.9	940.3
47,5°	69.8	14.1	954.4
50,0°	56.4	11.8	966.3
52,5°	46.1	10.0	976.3
55,0°	36.8	8.3	984.6
57,5°	26.6	6.1	990.7
60,0°	17.5	4.1	994.9
62,5°	9.8	2.4	997.2
65,0°	5.8	1.4	998.7
67,5°	3.3	0.8	999.5
70,0°	1.5	0.4	999.9
72,5°	0.3	0.1	1000.0
75,0°	0.0	0.0	1000.0
77,5°	0.0	0.0	1000.0
80,0°	0.0	0.0	1000.0
82,5°	0.0	0.0	1000.0
85,0°	0.0	0.0	1000.0
87,5°	0.0	0.0	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family	Order number: 51DB31EF21B1D	LP number
Lunis 21	EAN: 4069025442772	59838_22

siteco

UGR-Table

Standard room

Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions			View crosswise (C0)					View endwise (C90)			
x	y										
2H	2H	16.1	17.2	16.5	17.5	17.9	16.1	17.2	16.5	17.5	17.9
	3H	16.0	16.9	16.4	17.3	17.6	16.0	16.9	16.4	17.3	17.6
	4H	15.9	16.8	16.3	17.1	17.5	15.9	16.8	16.3	17.1	17.5
	6H	15.8	16.6	16.2	17.0	17.4	15.8	16.6	16.2	17.0	17.4
	8H	15.9	16.5	16.3	16.9	17.3	15.9	16.5	16.3	16.9	17.3
	12H	15.8	16.4	16.3	16.8	17.2	15.8	16.4	16.3	16.8	17.2
4H	2H	16.0	16.9	16.4	17.2	17.6	16.0	16.9	16.4	17.2	17.6
	3H	15.8	16.6	16.2	16.9	17.4	15.8	16.6	16.2	16.9	17.4
	4H	15.7	16.4	16.2	16.8	17.2	15.7	16.4	16.2	16.8	17.2
	6H	15.6	16.2	16.1	16.6	17.1	15.6	16.2	16.1	16.6	17.1
	8H	15.6	16.1	16.1	16.5	17.0	15.6	16.1	16.1	16.5	17.0
	12H	15.6	15.9	16.0	16.4	16.9	15.6	15.9	16.0	16.4	16.9
8H	4H	15.6	16.1	16.1	16.5	17.0	15.6	16.1	16.1	16.5	17.0
	6H	15.5	15.8	16.0	16.3	16.8	15.5	15.8	16.0	16.3	16.8
	8H	15.4	15.7	15.9	16.2	16.8	15.4	15.7	15.9	16.2	16.8
	12H	15.3	15.6	15.9	16.1	16.7	15.3	15.6	15.9	16.1	16.7
12H	4H	15.6	15.9	16.0	16.4	16.9	15.6	15.9	16.0	16.4	16.9
	6H	15.4	15.7	15.9	16.2	16.8	15.4	15.7	15.9	16.2	16.8
	8H	15.3	15.6	15.9	16.1	16.7	15.3	15.6	15.9	16.1	16.7

Luminance table

Max. for $\gamma >= 65°$

Photometric dimensions in mm: D = 182

C-planes	0°
γ	Luminance in cd/m²
45,0°	12243.7
50,0°	8700.5
55,0°	6367.2
60,0°	3462.9
65,0°	1365.7
70,0°	436.4
75,0°	0.0
80,0°	0.0
85,0°	0.0


Photometric test report

Family	Order number: 51DB31EF21B1D	LP number
Lunis 21	**EAN: 4069025442772**	**59838_22**

siteco

Luminance values in cd/m²

γ 65° γ 70° γ 75° γ 80° γ 85°

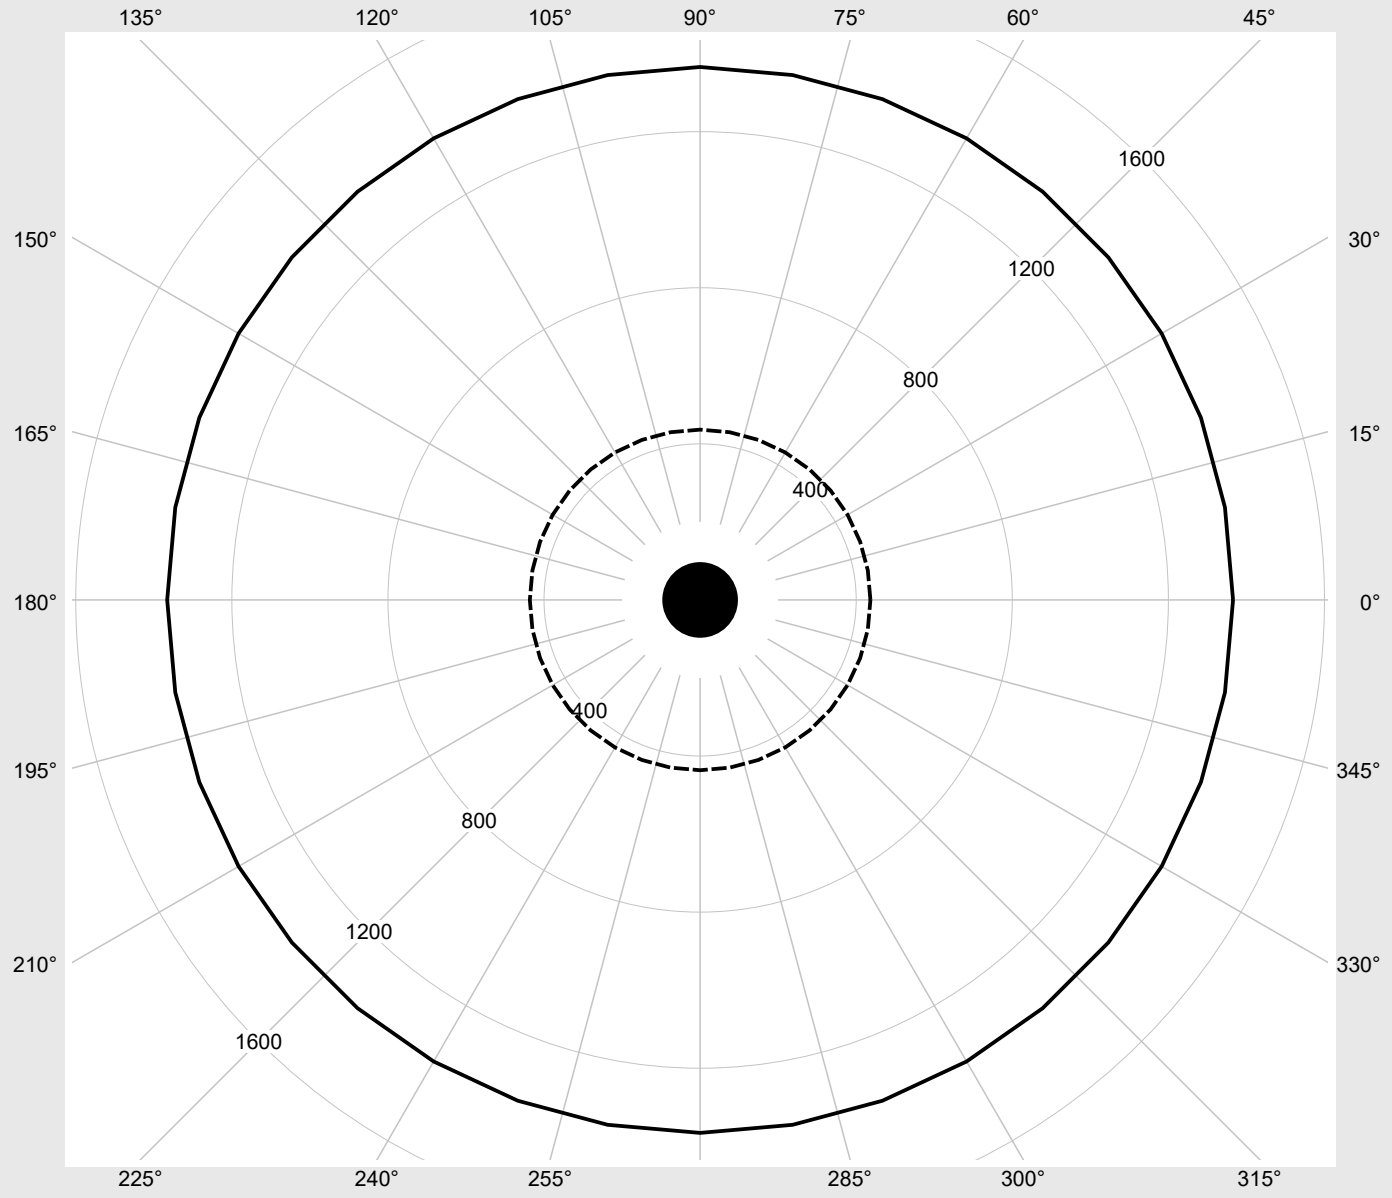

Photometric test report

Family	Order number: 51DB31EF21B1D	LP number
Lunis 21	**EAN: 4069025442772**	**59838_22**

siteco

Multilumen Table

environmental temperature: 25°C

DIP-Step	Switch Setting 1	2	3	Luminous flux [lm]	Power consumption [W]
7	ON	ON	ON	4390	27.9
6	ON	ON	OFF	4100	25.9
5	ON	OFF	ON	3800	23.8
4	ON	OFF	OFF	3500	22.0
3	OFF	ON	ON	3200	20.2
2	OFF	ON	OFF	2900	18.1
1	OFF	OFF	ON	2580	16.2
0	OFF	OFF	OFF	2270	14.3