


Photometric test report

Family Licross® 11 Protected	Order number: 51TD1BCN485G EAN: 4058352918296	LP number 58522_289
	Version prismatic cover, frosted, wide distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-Multilumen CLOi Rated values Net luminous flux = 8520 lm Power consumption = 49.4 W Luminous efficacy = 172.5 lm/W	serial documentation 14.11.2025

siteco

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 420 cd/klm**

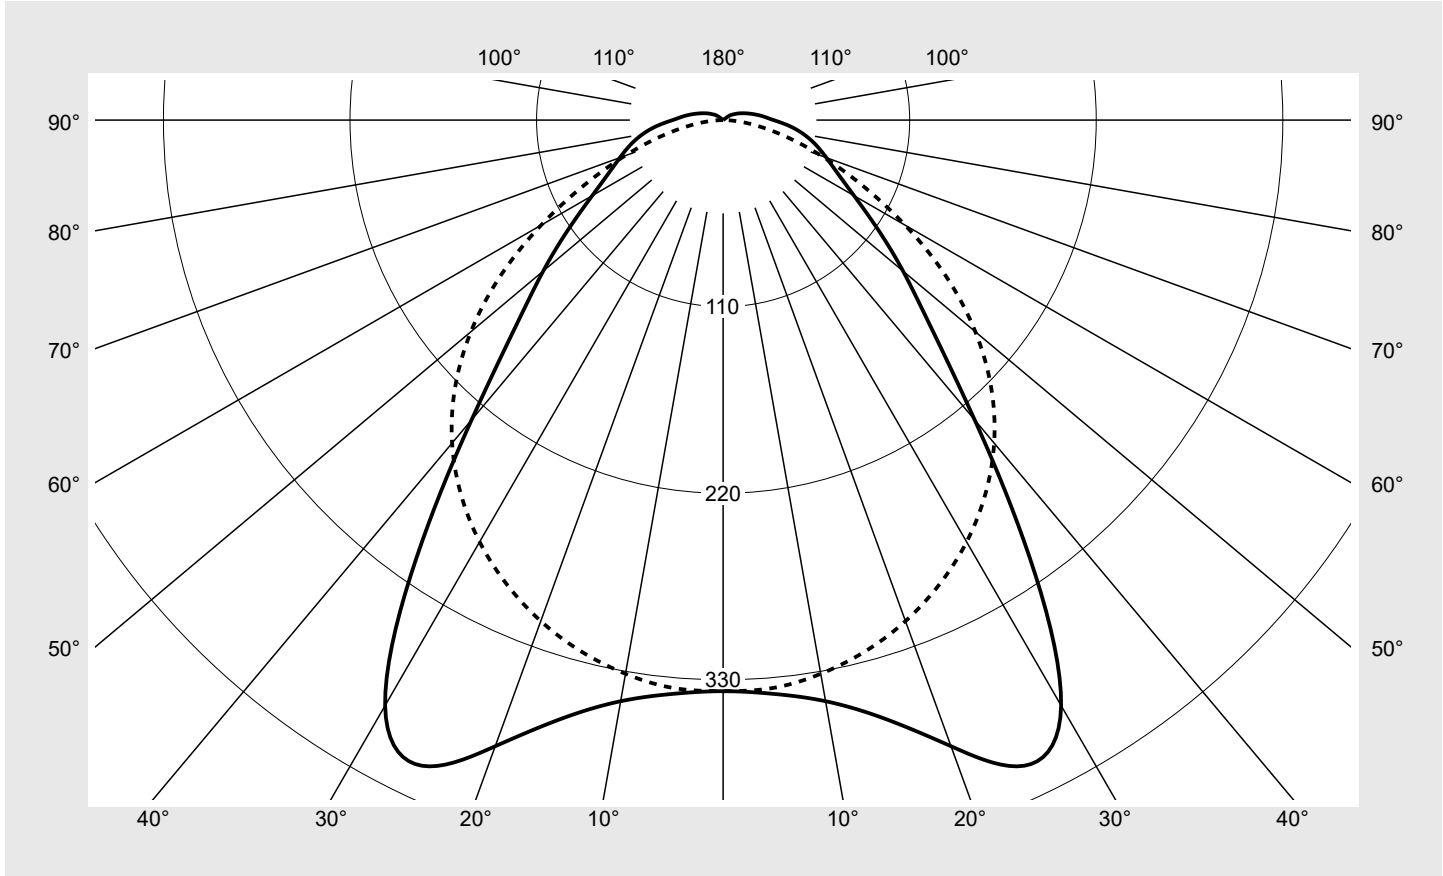

Classifications	
DIN 5040	A 4 1
CIE	N1=54 N2=82 N3=95 N4=97 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	96.8%
ϕ_o	3.2%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Protected	Order number: 51TD1BCN485G EAN: 4058352918296	LP number 58522_289
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	336.7	336.7	336.7	336.7	336.7	336.7	336.7	2.0	2.0
5°	339.6	338.6	335.9	336.3	336.9	336.0	336.1	16.1	18.1
10°	347.9	347.0	341.3	338.0	335.2	332.1	331.5	32.3	50.4
15°	365.1	363.4	352.6	343.0	333.9	326.3	324.2	48.8	99.2
20°	392.9	389.6	370.2	350.5	332.5	318.7	314.4	66.1	165.3
25°	420.1	417.2	393.2	361.7	330.8	309.3	301.9	83.9	249.2
30°	398.6	403.0	395.6	369.9	329.0	297.6	287.2	97.7	346.8
35°	315.4	327.2	346.9	353.5	322.7	283.2	269.5	100.9	447.7
40°	230.7	242.3	270.7	302.4	300.6	265.5	248.6	95.2	542.9
45°	173.9	182.1	205.6	239.8	258.3	240.0	223.6	85.6	628.5
50°	138.5	144.5	161.6	188.3	208.7	204.6	194.1	75.2	703.7
55°	110.6	115.5	130.2	150.3	164.6	163.9	160.4	64.4	768.0
60°	89.1	92.4	103.6	120.9	128.5	124.9	123.9	53.5	821.6
65°	74.6	76.3	82.5	95.4	99.4	91.8	89.8	43.7	865.3
70°	64.8	65.1	66.4	73.4	75.2	65.0	61.7	35.1	900.3
75°	56.7	56.1	54.1	55.3	54.0	43.4	39.3	27.4	927.8
80°	48.3	47.2	43.9	40.6	36.4	26.8	21.9	20.7	948.5
85°	39.1	38.0	34.5	29.4	22.9	14.4	9.1	14.9	963.3
90°	29.8	28.8	25.7	20.2	13.1	5.8	0.8	9.9	973.3
95°	24.0	23.5	21.4	16.6	9.9	3.5	0.7	7.9	981.2
100°	19.2	18.8	17.3	13.3	7.4	1.9	0.6	6.2	987.4
105°	15.1	14.8	13.6	10.2	5.0	0.8	0.6	4.6	992.0
110°	11.8	11.3	10.2	7.3	2.9	0.6	0.6	3.3	995.3
115°	9.0	8.5	7.3	4.7	1.4	0.7	0.7	2.3	997.6
120°	6.6	6.1	4.9	2.7	0.8	0.7	0.7	1.5	999.1
125°	4.4	4.0	2.9	1.3	0.7	0.8	0.8	0.9	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Protected	Order number: 51TD1BCN485G EAN: 4058352918296	LP number 58522_289
--	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.6	22.3	21.0	22.6	22.9	22.5	24.1	22.8	24.4	24.8
	3H	21.8	23.3	22.2	23.6	23.9	23.5	25.0	23.9	25.3	25.7
	4H	22.5	23.9	22.9	24.2	24.6	23.9	25.2	24.3	25.6	26.0
	6H	23.2	24.5	23.6	24.9	25.3	24.1	25.4	24.5	25.8	26.1
	8H	23.6	24.8	24.1	25.2	25.6	24.2	25.4	24.6	25.8	26.2
	12H	24.0	25.2	24.5	25.6	26.0	24.3	25.4	24.7	25.8	26.2
4H	2H	21.5	22.8	21.9	23.2	23.6	22.9	24.3	23.3	24.7	25.0
	3H	22.8	24.0	23.2	24.4	24.8	24.2	25.4	24.6	25.8	26.2
	4H	23.6	24.7	24.1	25.1	25.5	24.7	25.8	25.1	26.2	26.6
	6H	24.5	25.5	25.0	25.9	26.3	25.1	26.0	25.5	26.4	26.9
	8H	25.0	25.8	25.5	26.3	26.8	25.2	26.0	25.7	26.5	27.0
	12H	25.5	26.2	26.0	26.7	27.2	25.3	26.0	25.8	26.5	27.0
8H	4H	24.0	24.9	24.5	25.3	25.8	25.0	25.8	25.4	26.3	26.8
	6H	25.1	25.8	25.6	26.3	26.8	25.5	26.2	26.0	26.7	27.2
	8H	25.7	26.3	26.2	26.8	27.3	25.7	26.4	26.2	26.8	27.4
	12H	26.3	26.9	26.9	27.4	27.9	25.9	26.4	26.4	26.9	27.5
12H	4H	24.1	24.9	24.6	25.3	25.8	25.0	25.8	25.5	26.3	26.8
	6H	25.2	25.9	25.7	26.3	26.9	25.6	26.3	26.1	26.7	27.3
	8H	25.9	26.4	26.4	26.9	27.5	25.9	26.4	26.4	26.9	27.5


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 13	H(C180) = 13
			B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
	45°	15555.3	16372.3	18751.6	22390.0	24881.8	24012.0	23340.2	
	50°	13265.1	13917.5	15833.2	18959.4	21796.8	22348.2	22289.1	
	55°	11491.3	12082.4	13894.0	16554.2	18930.3	19865.6	20635.5	
	60°	10209.4	10666.2	12233.7	14817.1	16575.7	17152.5	18295.0	
	65°	9601.8	9908.9	11000.3	13304.5	14731.9	14679.1	15686.5	
	70°	9584.7	9746.6	10265.2	11968.4	13202.3	12544.8	13313.6	
	75°	9960.5	10001.9	10025.9	10943.1	11755.9	10654.9	11201.3	
	80°	10549.3	10494.5	10264.9	10336.1	10500.9	9156.5	9292.3	
	85°	11388.4	11326.6	11017.8	10612.2	9943.6	8144.0	7724.6	

Photometric test report

Family Licross® 11 Protected	Order number: 51TD1BCN485G EAN: 4058352918296	LP number 58522_289
---	--	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

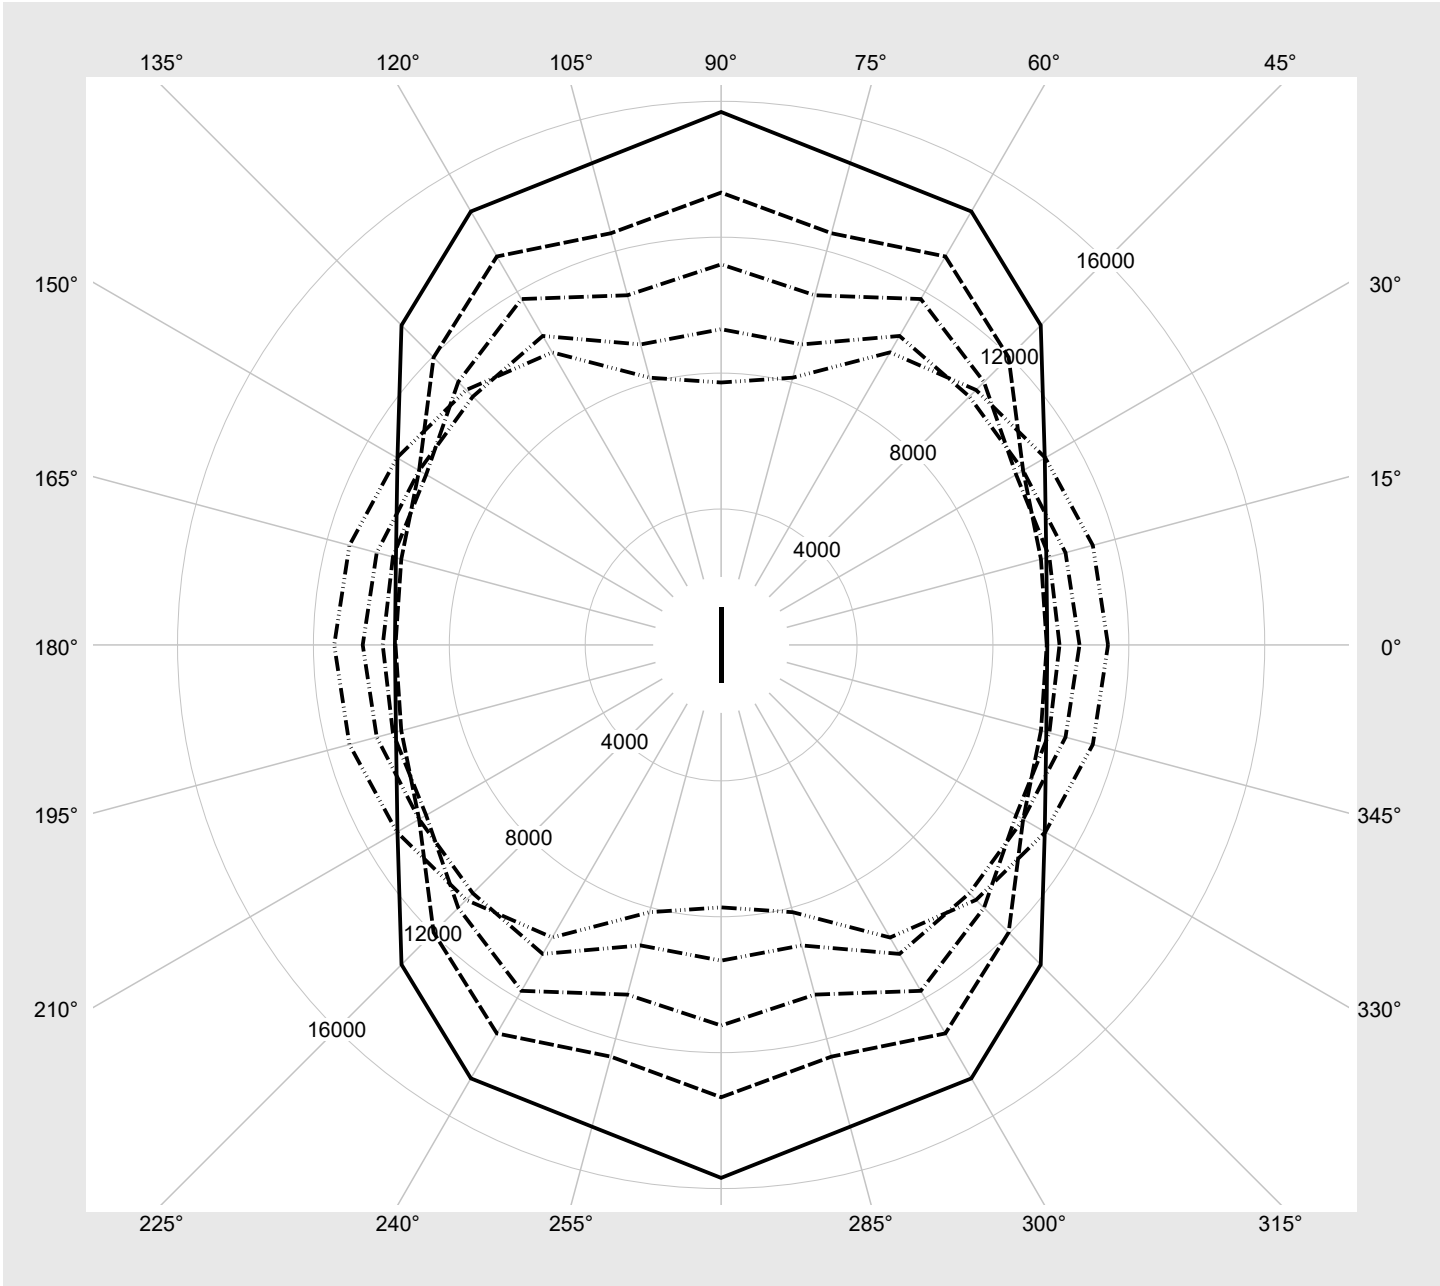

Photometric test report

Family Licross® 11 Protected	Order number: 51TD1BCN485G EAN: 4058352918296	LP number 58522_289
--	--	--------------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
	1	2	3			end of lifetime	average
1	A	C	E	8520	49.4	52.1	50.8
2	A	C	F	8030	46.2	48.9	47.6
3	A	D	E	7530	43.1	45.4	44.2
4	A	D	F	7110	40.5	42.7	41.6
5	B	C	E	6600	37.4	39.6	38.5
6	B	C	F	6160	34.8	36.5	35.6
7	B	D	E	5650	31.8	33.5	32.6
8	B	D	F	5210	29.2	30.9	30.0