

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TL1DCN4CXM
EAN: 4069025021656

LP number
59520_283



Version cover, opal, direct-/ indirect distribution, diffuse
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-Multilumen CLOi
Rated values Net luminous flux = 12370 lm
 Power consumption = 66.5 W
 Luminous efficacy = 186 lm/W

serial
documentation
14.11.2025


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 294 cd/klm

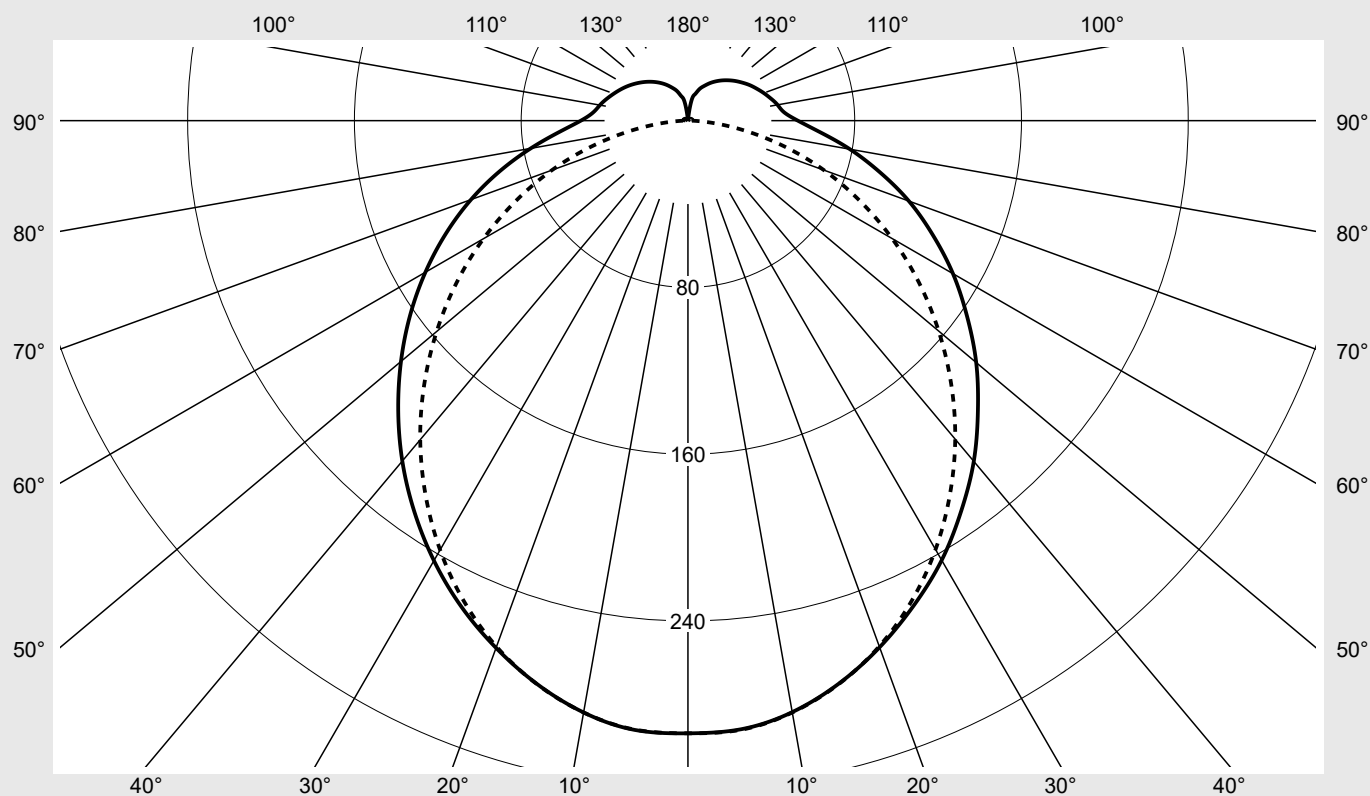

Classifications

DIN 5040 B 3 1
 CIE N1=44 N2=73 N3=91
 N4=87 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 87.4%
 ϕ_o 12.6%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1DCN4CXM EAN: 4069025021656	LP number 59520_283
Table of values for luminous intensities		Maximum luminous intensity

sITeco

C- planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
γ	Luminous intensity in cd/klm												
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9
5°	293.1	292.7	289.9	291.0	293.1	293.0	293.3	293.1	293.1	292.5	291.2	291.6	293.4
10°	288.1	287.8	285.0	286.0	288.1	287.9	288.3	288.0	288.0	287.5	286.2	286.7	288.3
15°	279.6	279.4	276.6	277.6	279.6	279.4	279.8	279.5	279.5	279.0	277.7	278.4	279.8
20°	268.8	268.4	265.5	266.2	268.1	267.8	268.3	268.1	268.0	267.5	266.6	267.8	269.2
25°	256.5	256.4	252.9	252.4	253.9	253.4	254.1	253.8	253.8	253.6	254.0	255.9	257.2
30°	243.5	242.9	239.1	237.4	237.4	236.9	237.6	237.4	237.5	238.5	240.0	242.5	243.7
35°	228.6	228.2	223.9	221.1	219.2	218.5	219.1	218.9	219.7	221.9	224.6	227.5	228.9
40°	213.3	212.5	208.1	204.0	200.4	198.8	199.5	199.5	201.1	204.3	208.6	211.7	213.2
45°	196.7	195.9	191.2	185.9	180.8	177.8	178.6	178.3	181.6	186.0	191.4	194.8	196.6
50°	180.5	179.0	174.4	167.8	161.5	156.5	157.0	156.9	161.7	167.6	173.9	177.7	179.7
55°	163.4	162.0	157.2	149.2	141.7	135.1	135.2	135.5	141.8	149.1	156.1	160.5	162.7
60°	146.8	144.8	139.8	131.0	122.1	114.1	113.1	114.2	121.9	130.6	138.3	143.3	145.4
65°	129.6	127.7	122.3	112.9	103.0	93.4	91.0	93.7	102.6	112.1	120.5	126.2	128.1
70°	112.8	110.6	104.4	95.0	83.9	73.2	69.4	73.2	83.4	93.6	102.3	109.1	110.8
75°	95.2	93.5	86.3	76.8	64.8	53.0	48.0	53.1	64.1	74.9	84.3	91.4	93.3
80°	78.9	76.8	69.4	59.0	47.0	34.5	28.0	34.2	45.8	57.3	67.7	74.1	76.6
85°	63.7	61.7	54.7	44.0	31.4	18.8	11.3	18.6	30.6	42.7	52.6	59.2	61.9
90°	52.7	50.3	47.2	33.6	21.8	9.7	1.7	9.7	21.3	32.8	42.6	49.1	51.4
95°	46.3	44.0	38.4	29.9	19.4	8.9	1.8	8.9	19.3	29.6	38.3	43.8	45.6
100°	43.6	41.6	36.5	28.4	19.0	9.0	2.1	8.7	18.6	27.9	35.8	41.3	42.9
105°	41.1	39.4	34.3	27.0	18.2	9.1	2.1	8.8	17.9	26.7	33.7	38.6	40.4
110°	38.7	36.7	32.3	25.7	17.6	9.2	2.0	8.7	17.0	25.1	31.7	36.0	37.9
115°	36.4	34.4	30.4	24.3	17.0	9.3	1.9	8.8	16.4	23.6	29.8	33.7	35.5
120°	34.1	32.2	28.7	23.1	16.5	9.4	1.8	8.8	15.7	22.3	27.9	31.4	33.2
125°	31.8	30.1	26.8	21.8	15.8	9.4	1.6	8.8	15.0	21.0	26.0	29.2	30.9
130°	29.6	27.9	25.1	20.7	15.3	9.5	1.4	8.7	14.3	19.7	24.1	27.1	28.6
135°	27.4	25.8	23.3	19.5	14.6	8.1	1.3	7.6	13.7	18.5	22.3	24.9	26.4
140°	25.2	23.7	21.6	18.3	13.6	7.0	1.3	6.4	12.7	17.1	20.5	22.8	24.2
145°	23.0	21.6	19.8	16.6	12.1	6.4	1.2	5.9	11.1	15.6	18.8	20.7	21.9
150°	20.7	19.6	18.1	14.3	11.0	6.2	1.3	6.0	9.5	13.3	16.9	18.6	19.6
155°	18.4	17.4	15.6	12.5	8.2	5.5	1.3	5.2	7.5	11.1	14.5	16.4	17.3
160°	16.1	15.3	12.6	10.0	7.9	5.1	1.4	4.6	6.8	7.9	11.7	14.3	14.9
165°	13.1	12.1	8.6	7.8	8.1	5.4	1.4	4.8	6.9	7.0	6.9	11.2	12.1
170°	9.8	7.7	7.3	8.0	6.5	2.9	1.4	2.2	5.4	6.7	6.3	6.6	8.9
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Licross® 11 Recessed		Order number: 51TL1DCN4CXM EAN: 4069025021656										LP number 59520_283	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	195°	210°	225°	240°	255°	270°	285°	300°	315°	330°	345°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0°	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	293.9	1.8	1.8
5°	292.9	289.8	290.9	292.8	292.8	293.2	292.8	292.9	292.3	291.2	292.0	14.0	15.7
10°	288.0	285.0	285.8	287.9	287.8	288.3	287.9	288.0	287.3	286.3	287.0	27.3	43.1
15°	279.5	276.7	277.5	279.4	279.4	279.9	279.5	279.5	278.9	277.9	279.0	39.6	82.6
20°	268.9	265.7	266.2	268.0	267.9	268.5	268.2	268.1	267.5	266.6	267.7	50.2	132.8
25°	256.9	253.4	252.5	253.8	253.6	254.3	254.0	254.0	253.5	253.8	256.1	58.9	191.7
30°	243.4	239.6	237.7	237.4	237.1	237.8	237.6	237.8	238.3	239.7	242.3	65.6	257.3
35°	228.5	224.4	221.4	219.4	218.7	219.4	219.3	219.8	221.8	224.6	228.0	70.0	327.3
40°	212.7	208.2	204.2	200.7	198.9	199.8	199.8	201.1	204.3	208.6	211.9	72.3	399.6
45°	195.8	191.1	185.9	181.0	177.8	178.9	178.7	181.7	186.2	191.6	195.6	72.3	472.0
50°	178.6	174.0	167.6	161.4	156.5	157.3	157.3	162.0	168.0	174.3	178.3	70.5	542.5
55°	161.2	156.5	148.8	141.5	135.3	135.5	135.8	142.2	149.7	156.9	161.8	66.9	609.4
60°	143.7	138.7	130.1	121.6	114.2	113.3	114.6	122.5	131.3	139.3	144.4	61.7	671.1
65°	126.5	121.0	111.8	102.3	93.3	91.1	94.0	103.2	113.1	121.8	128.0	55.2	726.3
70°	109.1	102.8	93.5	83.0	72.9	69.4	73.6	84.1	94.6	103.5	110.4	47.6	773.9
75°	91.6	84.7	75.4	63.7	52.5	47.9	53.5	65.0	76.2	85.9	93.4	39.0	812.9
80°	74.9	67.7	57.5	45.8	33.9	27.9	34.5	46.6	58.5	69.1	75.6	30.2	843.1
85°	59.9	53.1	42.6	30.4	18.3	11.1	18.9	31.3	43.7	53.8	61.1	22.2	865.3
90°	49.1	42.6	32.8	21.3	9.6	1.7	9.7	21.6	33.2	43.3	50.0	16.9	882.1
95°	43.4	38.0	29.6	19.2	8.8	1.8	8.9	19.4	29.7	38.6	44.5	14.9	897.1
100°	41.0	35.9	27.9	18.7	8.8	2.1	8.9	18.7	28.1	36.1	41.8	14.0	911.1
105°	38.7	33.7	26.5	17.8	8.7	2.1	9.0	18.1	27.0	34.2	39.3	13.1	924.2
110°	35.9	31.6	25.0	17.1	8.8	2.0	9.1	17.4	25.5	32.1	36.6	12.0	936.2
115°	33.6	29.7	23.6	16.4	8.7	1.9	9.3	16.9	24.2	30.4	34.4	11.0	947.2
120°	31.4	27.9	22.4	15.7	8.8	1.8	9.3	16.2	22.9	28.6	32.2	9.9	957.1
125°	29.2	26.0	21.1	15.0	8.7	1.6	9.4	15.7	21.7	26.8	30.1	8.9	966.0
130°	27.0	24.2	19.8	14.4	8.7	1.4	9.4	15.1	20.5	24.9	27.8	7.8	973.7
135°	24.9	22.4	18.6	13.7	7.3	1.3	8.2	14.6	19.3	23.2	25.8	6.7	980.4
140°	22.7	20.6	17.3	12.7	6.4	1.3	7.0	13.5	18.0	21.5	23.6	5.6	986.0
145°	20.6	18.9	15.7	11.3	5.8	1.2	6.5	12.0	15.8	19.8	21.6	4.5	990.5
150°	18.5	17.0	13.4	10.2	6.1	1.3	6.3	10.3	14.2	17.9	19.5	3.5	994.0
155°	16.4	14.6	11.8	7.5	4.9	1.3	5.8	8.1	12.0	15.5	17.4	2.6	996.6
160°	14.2	11.8	9.1	7.1	4.6	1.4	5.2	7.3	8.7	12.7	15.3	1.8	998.3
165°	11.1	8.0	7.1	7.6	4.8	1.4	5.5	7.3	7.6	7.6	12.0	1.1	999.4
170°	6.9	7.3	7.0	5.8	2.1	1.4	3.1	6.1	7.5	6.2	7.2	0.6	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1DCN4CXM EAN: 4069025021656	LP number 59520_283
--------------------------------	--	------------------------

UGR-Table		Standard room									siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions		View crosswise (C0)					View endwise (C90)					
x	y											
2H	2H	22.5	24.1	23.0	24.5	25.0	22.2	23.7	22.6	24.2	24.7	
	3H	24.4	25.9	24.9	26.3	26.9	23.7	25.2	24.2	25.6	26.1	
	4H	25.2	26.5	25.8	27.1	27.6	24.2	25.6	24.7	26.1	26.6	
	6H	26.0	27.2	26.6	27.7	28.4	24.6	25.8	25.1	26.4	26.9	
	8H	26.4	27.5	27.0	28.1	28.7	24.7	25.9	25.3	26.5	27.1	
	12H	26.7	27.8	27.3	28.3	29.0	24.8	25.9	25.3	26.4	27.1	
4H	2H	23.2	24.5	23.7	25.0	25.6	22.9	24.2	23.4	24.7	25.3	
	3H	25.2	26.4	25.8	26.9	27.5	24.5	25.7	25.1	26.2	26.8	
	4H	26.2	27.3	26.8	27.8	28.5	25.2	26.3	25.8	26.8	27.5	
	6H	27.2	28.1	27.8	28.7	29.3	25.7	26.6	26.3	27.2	27.9	
	8H	27.7	28.5	28.3	29.1	29.8	25.9	26.7	26.5	27.4	28.0	
	12H	28.1	28.8	28.7	29.4	30.1	26.0	26.7	26.6	27.3	28.1	
8H	4H	26.5	27.4	27.2	28.0	28.7	25.7	26.5	26.3	27.1	27.8	
	6H	27.7	28.4	28.3	29.0	29.7	26.3	27.0	27.0	27.7	28.4	
	8H	28.3	28.9	28.9	29.5	30.3	26.6	27.2	27.2	27.9	28.6	
	12H	28.8	29.3	29.5	30.0	30.8	26.7	27.2	27.4	27.9	28.7	
12H	4H	26.5	27.3	27.2	27.9	28.6	25.7	26.4	26.3	27.0	27.8	
	6H	27.7	28.3	28.4	29.0	29.7	26.5	27.0	27.1	27.7	28.5	
	8H	28.4	28.9	29.0	29.6	30.3	26.8	27.3	27.4	28.0	28.7	

Luminance table		Max. for $\gamma \geq 65^\circ$					Photometric dimensions in mm:		L = 1500 B = 76		H(C0) = 25 H(C90) = 25		H(C180) = 25 H(C270) = 25	
C-planes		0°	30°	60°	90°	120°	150°	180°	210°	240°	270°	300°	330°	
γ		Luminance in cd/m²												
45°		22715.6	22689.7	23539.6	26953.6	23634.5	22708.9	22696.9	22680.1	23560.7	27002.5	23645.1	22737.7	
50°		21891.3	21811.8	22468.3	25990.4	22502.3	21751.1	21793.0	21761.2	22457.1	26044.1	22536.1	21801.7	
55°		21034.4	20959.2	21352.5	24987.2	21364.7	20818.8	20940.6	20862.0	21328.1	25032.1	21425.7	20926.8	
60°		20296.7	20115.5	20229.4	23857.5	20202.6	19905.5	20106.3	19963.8	20148.9	23891.7	20296.5	20045.4	
65°		19504.6	19272.9	19108.8	22555.3	19033.6	18991.8	19284.9	19081.2	18973.5	22575.4	19153.9	19196.3	
70°		18794.9	18336.5	17854.2	21064.6	17733.6	17966.3	18457.5	18065.9	17647.5	21064.6	17888.7	18194.2	
75°		17916.9	17273.9	16300.8	18941.4	16111.5	16884.5	17566.3	16949.4	16021.8	18912.6	16335.5	17192.8	
80°		17208.8	16294.0	14578.3	15963.3	14218.8	15894.9	16696.4	15875.8	14203.9	15902.8	14462.6	16218.0	
85°		16650.7	15638.4	12830.6	11785.9	12512.5	15047.3	16182.5	15181.8	12409.8	11651.0	12797.4	15404.1	

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TL1DCN4CXM
EAN: 4069025021656

LP number
59520_283

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

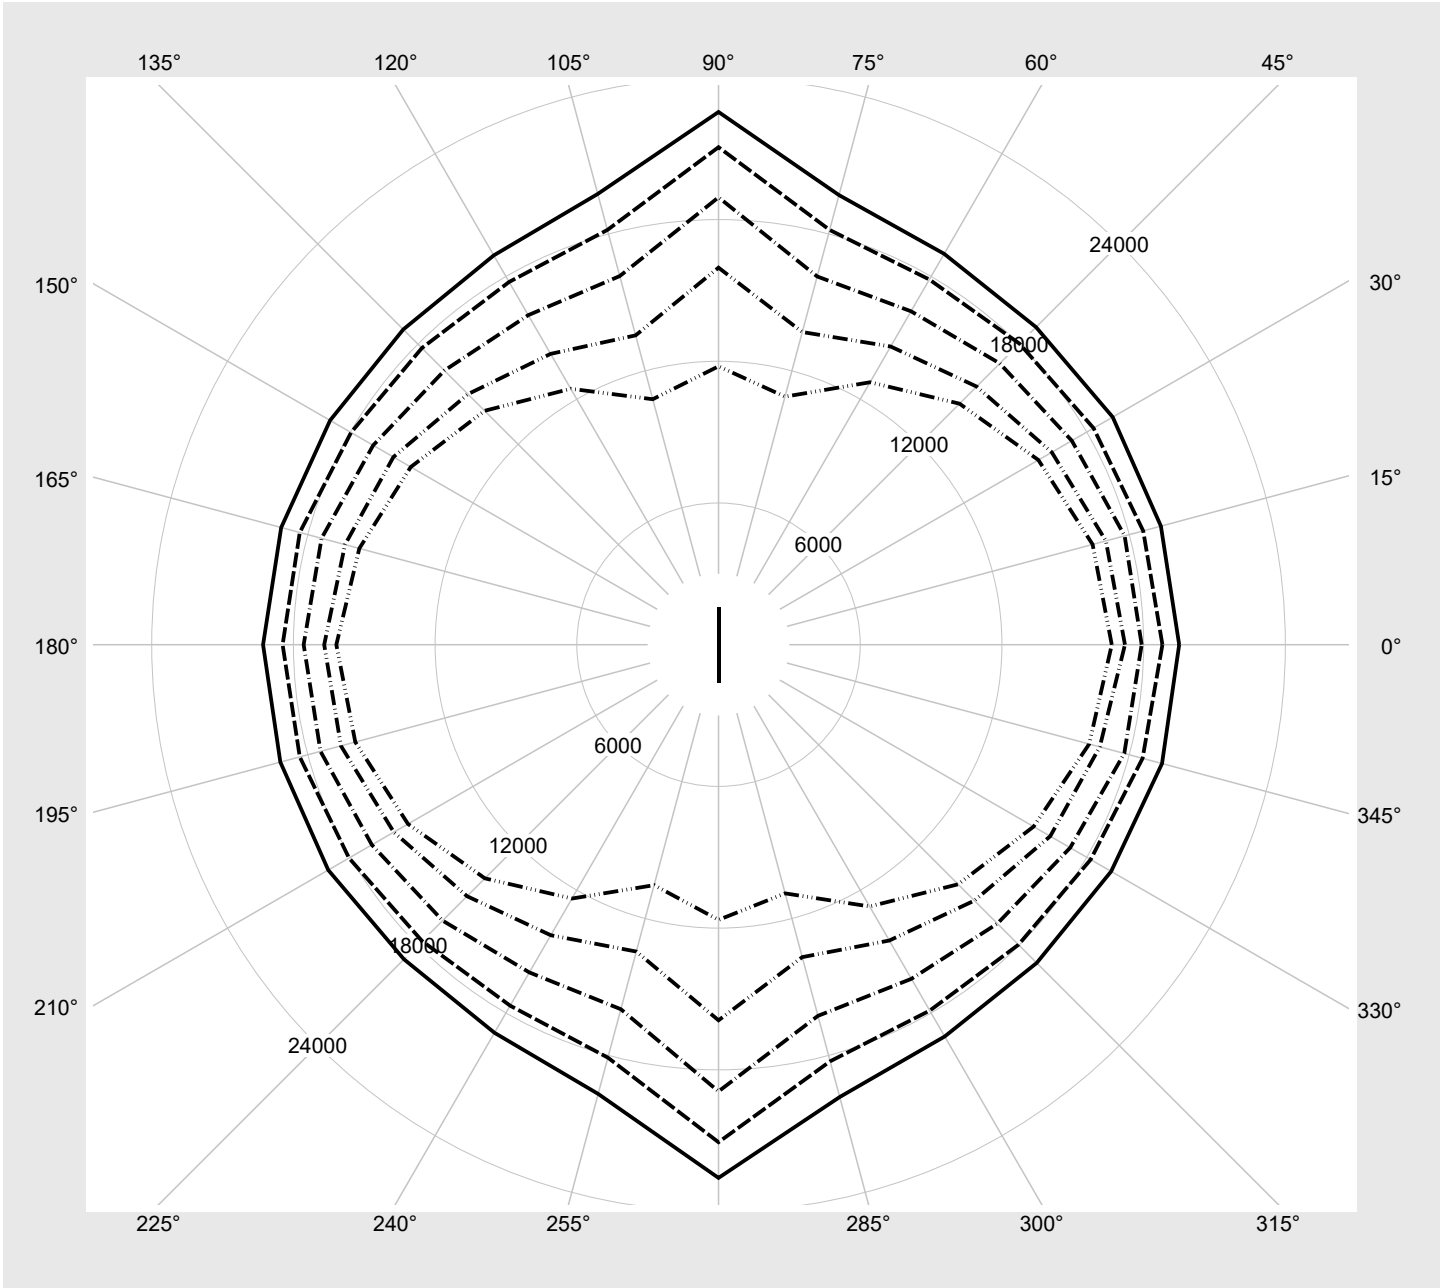

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL1DCN4CXM EAN: 4069025021656	LP number 59520_283
Multilumen Table	environmental temperature: 25°C	siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
	1	2	3			end of lifetime	average
1	A	C	E	12370	66.5	70.0	68.2
2	A	C	F	11770	63.0	66.5	64.8
3	A	D	E	10800	57.3	60.4	58.8
4	A	D	F	9820	51.7	54.3	53.0
5	B	C	E	8820	46.2	48.7	47.4
6	B	C	F	7890	41.1	43.2	42.2
7	B	D	E	6870	35.6	37.3	36.4
8	B	D	F	5920	30.6	32.3	31.4