

Photometric test report

Family
Monsun® 21

Order number: **51FB107L420K005**
EAN: **4069025131447**

LP number
59393_57



Version prismatic diffuser, opal, PMMA, wide distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG
Rated values Net luminous flux = 2590 lm
Power consumption = 15.6 W
Luminous efficacy = 166 lm/W

serial
documentation
05.02.2026


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 335 cd/klm

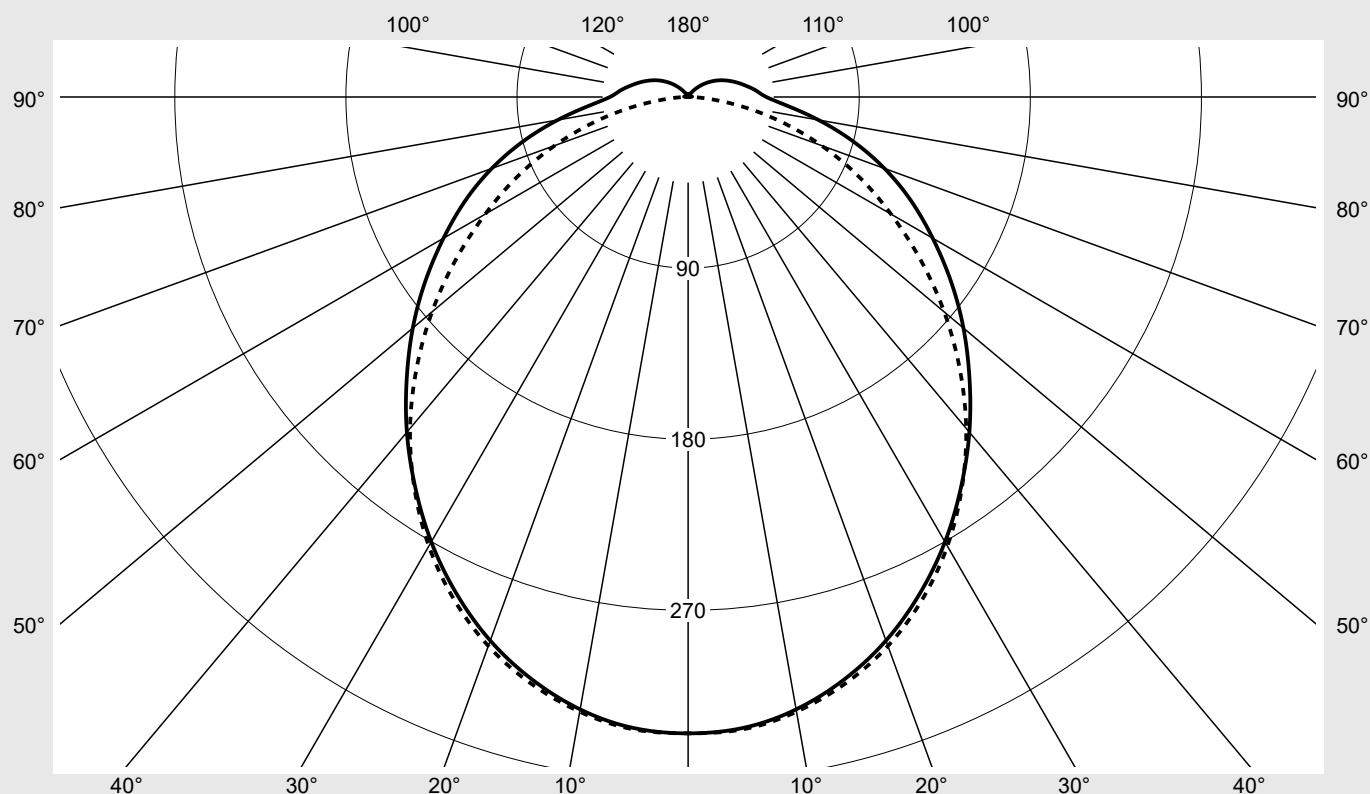

Classifications

DIN 5040 A 4 1
CIE N1=46 N2=76 N3=93
N4=94 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 93.9%
 ϕ_o 6.1%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 21	Order number: 51FB107L420K005 EAN: 4069025131447	LP number 59393_57
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	334.7	334.7	334.7	334.7	334.7	334.7	334.7	2.0	2.0
5°	333.1	333.6	331.1	331.9	332.7	333.2	333.8	15.9	17.9
10°	327.1	327.9	325.6	326.0	327.2	327.9	328.3	31.1	49.0
15°	317.2	318.4	316.4	316.9	317.9	318.6	319.4	45.1	94.1
20°	304.3	305.5	304.0	304.0	305.5	306.0	307.3	57.2	151.3
25°	288.3	289.5	288.3	288.0	289.4	289.8	291.5	67.0	218.3
30°	270.2	271.6	270.4	269.7	270.4	271.0	272.7	74.2	292.5
35°	250.3	251.6	250.4	249.2	249.0	249.3	251.0	78.6	371.1
40°	230.1	230.9	229.3	227.2	226.1	225.6	227.5	80.3	451.4
45°	209.3	209.8	207.4	204.4	202.0	200.5	202.0	79.4	530.9
50°	189.0	188.7	186.0	181.6	177.7	174.7	175.8	76.4	607.2
55°	168.7	168.2	164.8	159.1	153.5	149.2	149.2	71.4	678.6
60°	148.6	147.7	143.7	136.7	130.2	124.3	123.2	64.8	743.4
65°	129.5	127.8	123.0	114.9	108.3	100.8	99.1	57.1	800.4
70°	109.9	108.0	102.2	93.4	85.8	77.4	74.6	48.0	848.4
75°	89.7	87.9	81.7	72.5	63.8	55.3	51.1	38.1	886.5
80°	69.6	67.6	61.9	52.4	43.1	34.0	28.9	27.7	914.2
85°	52.2	49.9	44.6	35.4	25.7	16.3	10.6	18.5	932.7
90°	41.2	39.2	34.0	25.7	16.3	7.4	2.3	13.2	945.9
95°	36.2	34.5	30.1	22.6	13.9	5.6	2.0	11.4	957.3
100°	31.8	30.4	26.2	19.4	11.5	4.0	1.7	9.7	967.1
105°	27.9	26.5	22.5	16.5	9.2	2.5	1.5	8.1	975.2
110°	24.2	22.6	19.2	13.5	6.9	1.5	1.3	6.6	981.8
115°	20.8	19.1	16.0	10.8	4.9	1.4	1.2	5.2	987.0
120°	17.3	15.9	12.9	8.1	3.1	1.3	1.2	4.0	991.0
125°	13.9	12.5	9.8	5.6	1.6	1.3	1.1	2.9	993.8
130°	10.5	9.4	7.0	3.5	1.5	1.3	1.1	2.0	995.8
135°	7.3	6.4	4.4	1.9	1.5	1.2	1.0	1.3	997.1
140°	4.5	3.8	2.3	1.7	1.5	1.2	1.1	0.8	997.9
145°	2.3	2.1	1.9	1.7	1.5	1.3	1.2	0.5	998.4
150°	2.0	2.0	1.9	1.7	1.5	1.4	1.3	0.5	998.9
155°	1.9	1.9	1.8	1.7	1.5	1.4	1.4	0.4	999.3
160°	1.8	1.8	1.7	1.6	1.5	1.5	1.4	0.3	999.6
165°	1.7	1.7	1.6	1.5	1.5	1.5	1.4	0.2	999.8
170°	1.5	1.5	1.5	1.5	1.5	1.5	1.4	0.1	999.9
175°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	0.1	1000.0
180°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	0.0	1000.0

Photometric test report

Family Monsun® 21			Order number: 51FB107L420K005 EAN: 4069025131447							LP number 59393_57		
UGR-Table									Standard room			siteco
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)					
x	y											
2H	2H	18.0	19.7	18.3	20.0	20.3	17.8	19.5	18.1	19.8	20.1	
	3H	19.8	21.3	20.1	21.7	22.0	19.3	20.8	19.6	21.1	21.5	
	4H	20.6	22.1	21.0	22.4	22.8	19.8	21.3	20.2	21.7	22.0	
	6H	21.4	22.7	21.8	23.1	23.5	20.2	21.6	20.6	22.0	22.4	
	8H	21.7	23.0	22.1	23.4	23.8	20.4	21.7	20.8	22.0	22.4	
	12H	22.0	23.2	22.4	23.6	24.0	20.4	21.7	20.9	22.0	22.5	
4H	2H	18.7	20.1	19.1	20.5	20.9	18.5	20.0	18.9	20.3	20.7	
	3H	20.7	21.9	21.1	22.3	22.7	20.2	21.5	20.6	21.8	22.3	
	4H	21.7	22.8	22.1	23.2	23.6	20.9	22.0	21.3	22.4	22.9	
	6H	22.6	23.6	23.0	24.0	24.4	21.4	22.4	21.9	22.8	23.3	
	8H	23.0	23.9	23.4	24.3	24.8	21.6	22.5	22.0	22.9	23.4	
	12H	23.4	24.2	23.8	24.6	25.1	21.7	22.5	22.1	23.0	23.4	
8H	4H	22.0	22.9	22.5	23.4	23.8	21.3	22.3	21.8	22.7	23.2	
	6H	23.1	23.8	23.5	24.3	24.8	22.0	22.8	22.5	23.2	23.7	
	8H	23.6	24.3	24.1	24.8	25.3	22.2	22.9	22.7	23.4	23.9	
	12H	24.1	24.7	24.6	25.2	25.7	22.4	23.0	22.9	23.5	24.0	
12H	4H	22.0	22.9	22.5	23.3	23.8	21.4	22.2	21.9	22.7	23.2	
	6H	23.2	23.8	23.6	24.3	24.8	22.1	22.8	22.6	23.3	23.8	
	8H	23.7	24.3	24.2	24.8	25.3	22.4	23.0	22.9	23.5	24.0	

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1299 B = 87	H(C0) = 21 H(C90) = 21	H(C180) = 21 H(C270) = 21
C-planes	γ	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
			Luminance in cd/m²					
45° 50° 55° 60°	γ	5464.7	5495.0	5524.0	5603.0	5769.3	6028.1	6443.5
		5234.1	5244.9	5267.9	5320.9	5460.8	5698.4	6149.7
		5012.0	5020.6	5025.0	5044.9	5143.0	5364.7	5826.9
		4802.0	4797.5	4785.0	4764.2	4840.1	5017.0	5494.2
65° 70° 75° 80° 85°	γ	4626.6	4594.1	4552.0	4479.0	4554.7	4683.3	5193.2
		4427.5	4379.7	4287.3	4169.9	4194.3	4268.0	4787.7
		4176.7	4125.6	3995.4	3821.7	3761.5	3792.2	4268.9
		3879.5	3805.6	3659.2	3400.8	3225.0	3106.1	3493.6
		3650.1	3535.1	3370.5	3017.3	2663.4	2264.4	2360.6

Photometric test report

Family
Monsun® 21

Order number: 51FB107L420K005
EAN: 4069025131447

LP number
59393_57

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

