

Photometric test report

Family
Monsun® 21

Order number: **51FB20DL440K**
EAN: **4069025131720**

LP number
59394_37



Version prismatic diffuser, opal, polycarbonate, wide distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Rated values Net luminous flux = 4320 lm
Power consumption = 26.6 W
Luminous efficacy = 162.4 lm/W

serial
documentation
05.02.2026


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 318 cd/klm

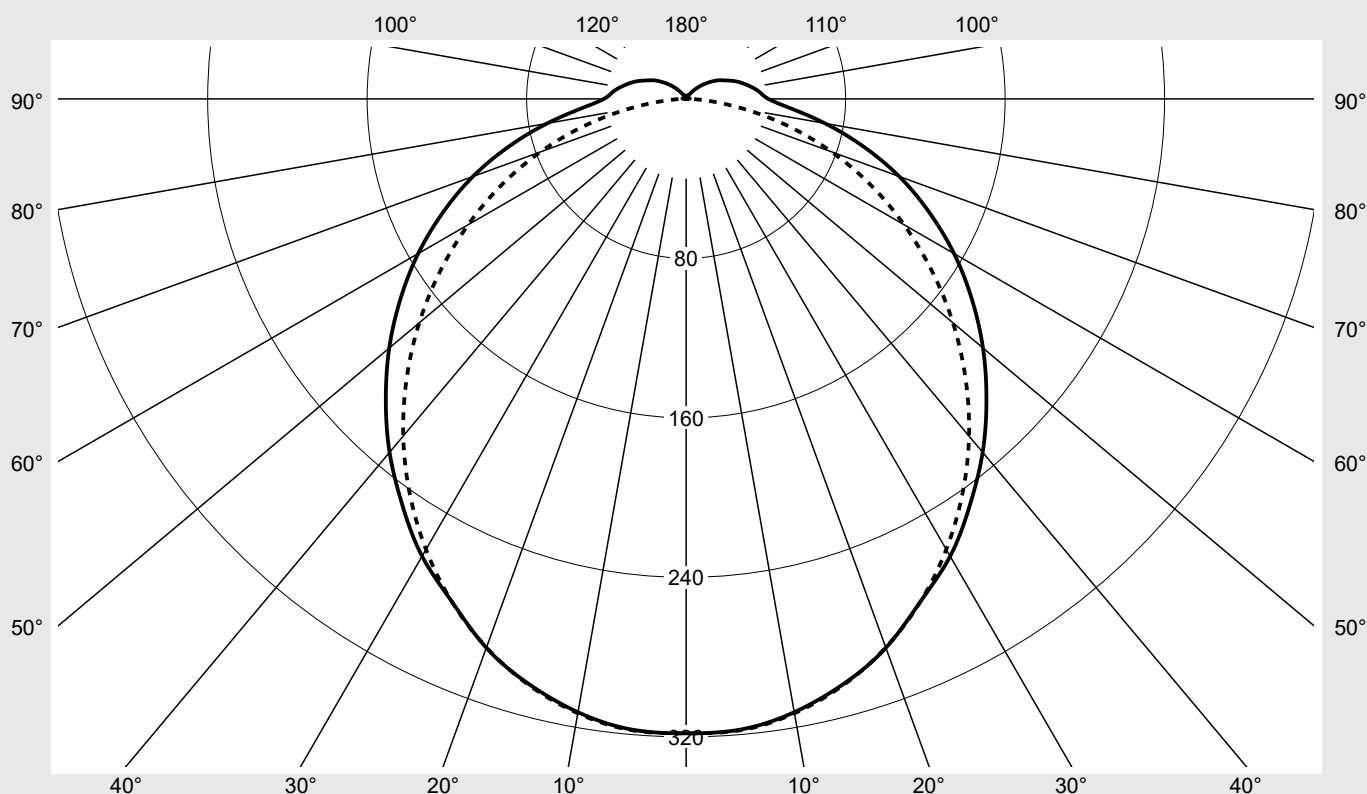

Classifications

DIN 5040 A 4 1
CIE N1=45 N2=75 N3=93
N4=94 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 93.7%
 ϕ_o 6.3%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 21	Order number: 51FB20DL440K EAN: 4069025131720	LP number 59394_37
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	318.2	318.2	318.2	318.2	318.2	318.2	318.2	1.9	1.9
5°	317.5	317.5	315.1	315.9	316.6	317.2	317.8	15.1	17.0
10°	312.4	312.6	310.3	310.8	311.5	312.2	312.9	29.7	46.7
15°	304.0	304.5	302.1	302.5	303.1	303.6	304.5	43.0	89.7
20°	293.0	293.3	291.0	291.0	291.4	291.9	292.8	54.7	144.5
25°	278.2	280.0	277.5	276.9	276.9	277.3	278.2	64.3	208.8
30°	264.9	265.0	262.4	260.7	260.0	260.0	261.0	71.8	280.6
35°	248.3	248.5	245.7	243.1	241.2	240.6	241.7	76.7	357.3
40°	231.4	230.9	227.8	224.4	221.2	219.7	220.8	79.3	436.6
45°	213.0	212.5	208.9	204.3	200.0	197.3	198.2	79.4	515.9
50°	194.4	193.4	189.5	184.3	178.4	174.4	174.7	77.3	593.2
55°	174.9	174.0	169.9	163.6	156.5	151.3	150.6	73.2	666.4
60°	155.2	153.6	149.3	142.2	134.7	128.1	126.2	67.1	733.5
65°	134.5	133.3	127.9	120.6	112.6	105.3	102.1	59.5	793.0
70°	113.8	111.2	106.2	98.6	90.1	81.8	77.7	50.1	843.1
75°	91.9	90.6	84.2	76.2	67.3	58.7	53.5	39.7	882.8
80°	70.8	68.8	62.9	54.4	45.2	36.1	30.1	28.6	911.4
85°	52.2	50.3	44.7	36.3	26.8	17.6	11.2	18.9	930.2
90°	41.3	39.2	33.7	25.7	16.7	7.7	2.0	13.2	943.5
95°	37.2	35.5	30.5	23.1	14.2	5.7	1.8	11.7	955.1
100°	33.6	31.9	27.2	20.0	11.9	4.1	1.6	10.1	965.3
105°	29.8	28.2	23.6	17.2	9.5	2.6	1.4	8.5	973.8
110°	26.0	24.2	20.2	14.2	7.2	1.5	1.2	7.0	980.8
115°	21.9	20.5	16.9	11.4	5.1	1.4	1.2	5.5	986.3
120°	18.6	17.0	13.7	8.7	3.2	1.3	1.1	4.3	990.6
125°	14.8	13.4	10.4	6.0	1.7	1.3	1.1	3.1	993.6
130°	11.3	10.0	7.4	3.7	1.5	1.3	1.1	2.1	995.7
135°	7.8	6.8	4.7	1.9	1.5	1.3	1.0	1.3	997.1
140°	4.8	4.0	2.4	1.7	1.5	1.2	1.0	0.8	997.9
145°	2.3	2.1	1.9	1.7	1.5	1.3	1.2	0.5	998.4
150°	2.0	2.0	1.9	1.7	1.5	1.4	1.3	0.5	998.9
155°	1.9	1.9	1.8	1.7	1.5	1.4	1.3	0.4	999.3
160°	1.8	1.8	1.8	1.6	1.5	1.5	1.4	0.3	999.6
165°	1.7	1.7	1.6	1.5	1.5	1.5	1.4	0.2	999.8
170°	1.5	1.6	1.5	1.5	1.5	1.5	1.4	0.1	999.9
175°	1.5	1.5	1.5	1.5	1.5	1.5	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Monsun® 21	Order number: 51FB20DL440K EAN: 4069025131720	LP number 59394_37
----------------------	--	-----------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	19.9	21.7	20.3	22.0	22.3	19.6	21.4	20.0	21.7	22.0
	3H	21.8	23.3	22.1	23.7	24.0	21.2	22.8	21.6	23.1	23.5
	4H	22.6	24.1	23.0	24.4	24.8	21.8	23.3	22.2	23.6	24.0
	6H	23.3	24.7	23.7	25.1	25.5	22.2	23.6	22.6	24.0	24.4
	8H	23.7	25.0	24.1	25.3	25.7	22.4	23.7	22.8	24.1	24.5
	12H	24.0	25.2	24.4	25.6	26.0	22.4	23.7	22.9	24.1	24.5
4H	2H	20.7	22.1	21.1	22.5	22.9	20.4	21.9	20.8	22.3	22.6
	3H	22.7	24.0	23.1	24.3	24.8	22.2	23.5	22.6	23.8	24.3
	4H	23.7	24.8	24.1	25.2	25.6	22.9	24.1	23.4	24.5	24.9
	6H	24.5	25.6	25.0	26.0	26.4	23.4	24.5	23.9	24.9	25.4
	8H	24.9	25.9	25.4	26.3	26.8	23.6	24.6	24.1	25.0	25.5
	12H	25.3	26.1	25.8	26.6	27.1	23.7	24.6	24.2	25.0	25.5
8H	4H	24.0	24.9	24.5	25.4	25.9	23.4	24.3	23.8	24.7	25.2
	6H	25.0	25.8	25.5	26.3	26.8	24.0	24.8	24.5	25.3	25.8
	8H	25.5	26.3	26.0	26.7	27.2	24.3	25.0	24.8	25.5	26.0
	12H	26.1	26.7	26.6	27.1	27.7	24.4	25.0	24.9	25.5	26.1
12H	4H	24.0	24.9	24.5	25.4	25.8	23.5	24.3	23.9	24.7	25.2
	6H	25.1	25.8	25.6	26.3	26.8	24.2	24.9	24.7	25.4	25.9
	8H	25.7	26.3	26.2	26.8	27.3	24.5	25.1	25.0	25.6	26.1

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1299 B = 87		H(C0) = 21 H(C90) = 21		H(C180) = 21 H(C270) = 21	
C-planes	γ	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°			
		Luminance in cd/m²									
	45°	9277.6	9284.0	9276.6	9343.4	9528.0	9891.4	10545.0			
	50°	8977.9	8963.1	8952.0	9003.3	9141.1	9487.4	10195.5			
	55°	8669.5	8659.3	8641.9	8652.8	8745.2	9070.3	9806.9			
	60°	8366.5	8324.3	8292.2	8261.9	8348.5	8624.7	9388.0			
	65°	8016.3	7990.9	7896.3	7845.1	7903.3	8155.9	8929.6			
	70°	7645.4	7525.7	7435.3	7346.9	7348.0	7530.0	8314.2			
	75°	7140.8	7097.1	6870.4	6700.9	6610.4	6713.7	7449.0			
	80°	6575.7	6451.3	6203.4	5888.8	5642.9	5512.5	6071.5			
	85°	6085.9	5943.0	5624.6	5167.8	4623.7	4068.7	4142.0			

Photometric test report

Family
Monsun® 21

Order number: 51FB20DL440K
EAN: 4069025131720

LP number
59394_37

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

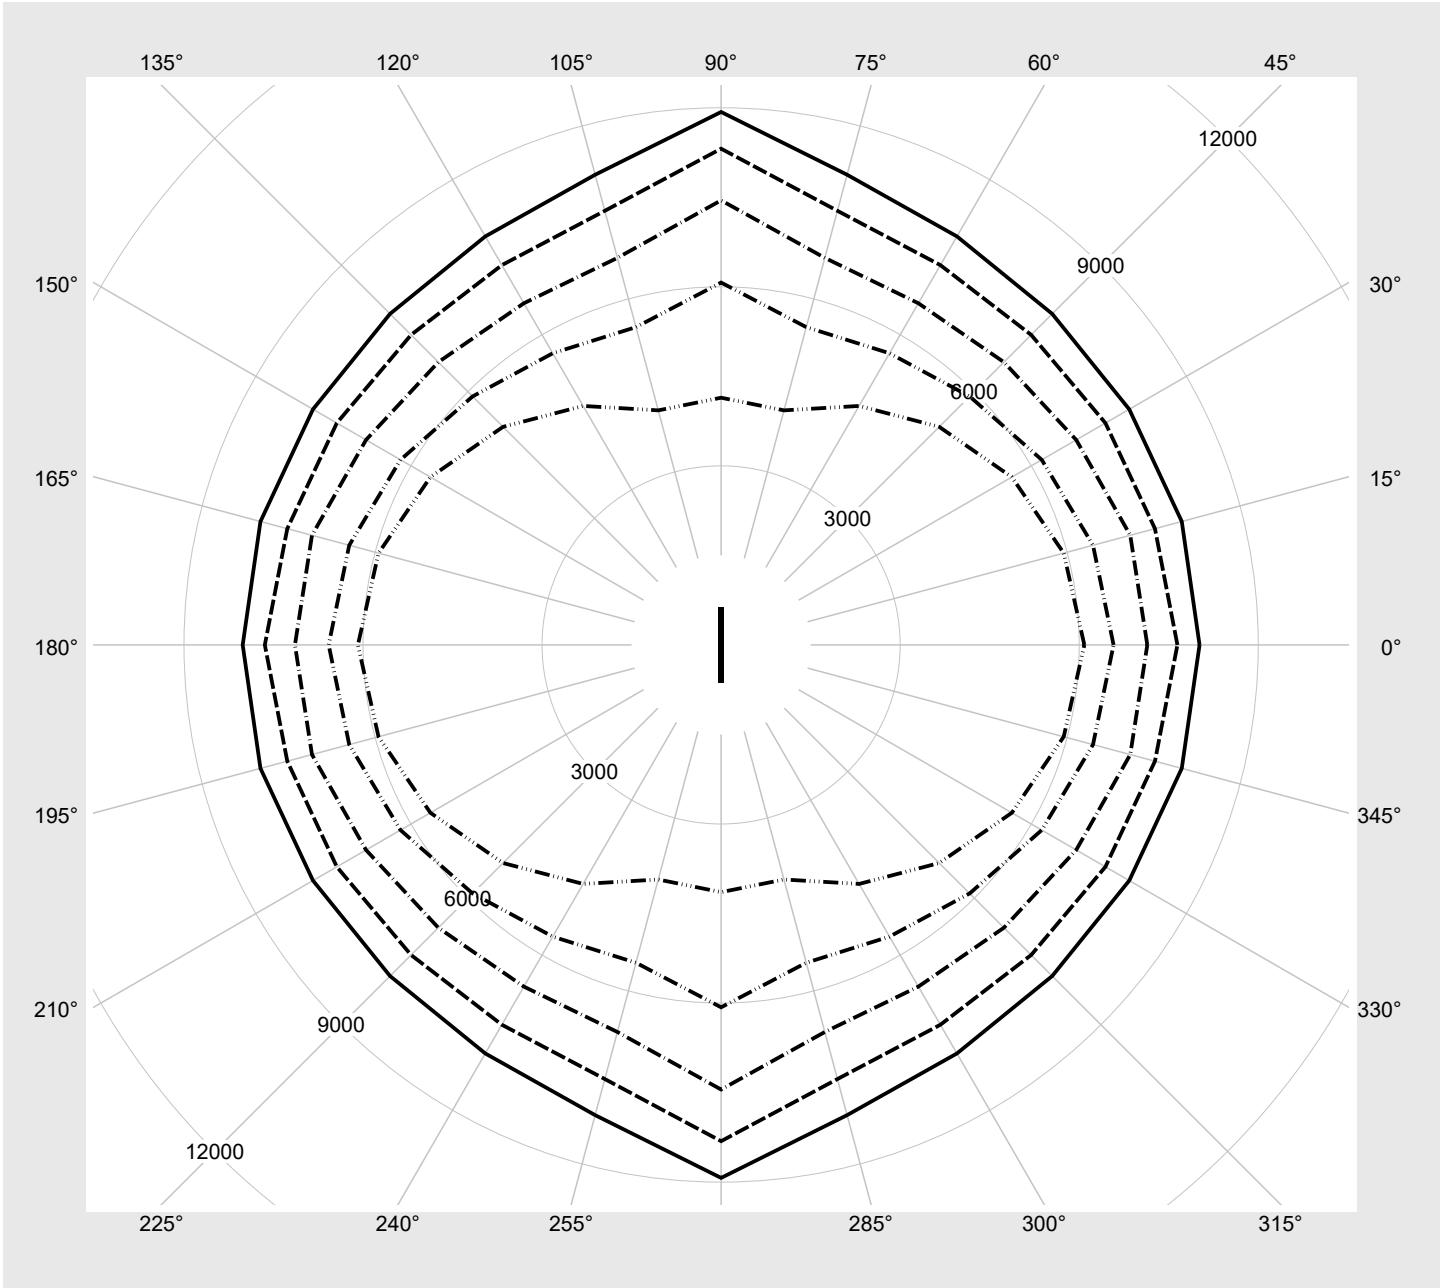

Photometric test report

Family Monsun® 21	Order number: 51FB20DL440K EAN: 4069025131720	LP number 59394_37
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	4320	26.6
95	241	252	4108	25.5
90	228	250	3892	24.2
85	215	248	3678	23.0
80	202	246	3463	21.8
75	189	243	3246	20.5
70	176	241	3030	19.3
65	163	238	2811	17.9
60	150	235	2591	16.7
55	137	231	2370	15.3
50	125	228	2165	14.1
45	112	224	1942	12.7
40	100	220	1736	11.4
35	87	215	1511	10.1
30	75	209	1303	8.8
25	62	202	1076	7.6
20	50	194	867	6.4
15	37	183	639	5.2
10	25	169	428	4.1
5	13	145	217	3.2
4	11	139	181	3.0