

Photometric test report

Family
Monsun® 21

Order number: 51FB10DP467C3H
EAN: 4069025178060

LP number
58939_270



Version prismatic diffuser, opal, PMMA, wide distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Setting AC-mode
Rated values Net luminous flux = 6060 lm
 Power consumption = 36.5 W
 Luminous efficacy = 166 lm/W

serial
documentation
06.02.2026


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 340 cd/klm

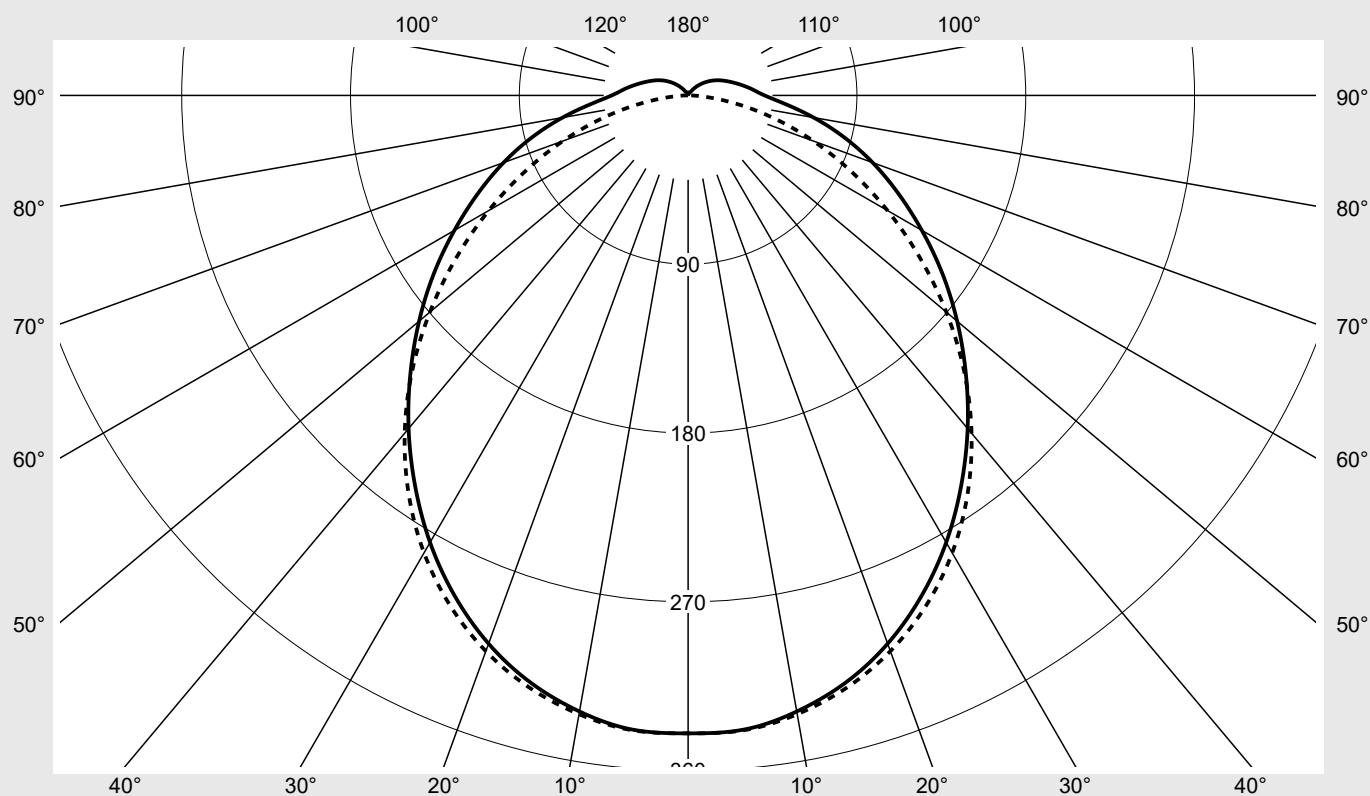

Classifications

DIN 5040 A 4 1
 CIE N1=47 N2=77 N3=93
 N4=94 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 94.2%
 ϕ_o 5.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 21	Order number: 51FB10DP467C3H EAN: 4069025178060	LP number 58939_270
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	340.1	340.1	340.1	340.1	340.1	340.1	340.1	2.0	2.0
5°	339.4	338.3	336.5	337.9	339.5	339.4	339.8	16.2	18.2
10°	333.5	333.0	331.2	332.8	334.6	334.7	335.0	31.7	49.9
15°	324.2	324.2	322.5	324.2	326.1	326.4	326.9	46.1	96.0
20°	311.0	311.6	310.1	311.9	314.1	314.7	315.3	58.6	154.6
25°	294.4	295.4	294.1	296.0	298.4	299.4	300.2	68.7	223.4
30°	275.2	276.6	275.1	276.8	279.4	280.7	281.6	76.1	299.5
35°	253.9	255.2	253.8	254.9	257.1	258.4	259.7	80.5	380.0
40°	231.8	232.9	231.3	231.1	232.5	233.8	235.1	81.9	461.9
45°	209.4	209.9	207.8	205.9	206.1	206.6	208.2	80.4	542.4
50°	187.2	187.1	184.8	181.3	179.3	178.3	179.7	76.6	619.0
55°	165.5	164.8	162.1	157.0	153.1	150.2	150.9	70.7	689.7
60°	143.9	142.9	139.5	133.7	127.9	123.2	122.7	63.3	753.0
65°	123.6	122.5	117.8	111.0	104.2	97.9	96.0	54.9	808.0
70°	104.7	103.3	97.1	89.4	81.7	74.3	71.0	45.8	853.8
75°	86.1	84.4	77.8	69.2	60.2	52.2	47.8	36.3	890.0
80°	68.0	66.1	60.2	50.5	40.7	32.1	26.9	26.7	916.7
85°	51.8	50.0	44.6	35.3	24.7	15.7	10.1	18.3	935.0
90°	40.8	39.2	34.4	26.0	15.9	6.9	1.8	13.1	948.2
95°	34.8	33.5	29.7	22.7	13.6	5.1	1.6	11.2	959.3
100°	29.9	28.8	25.4	19.2	11.3	3.7	1.4	9.4	968.7
105°	25.7	24.7	21.4	16.1	8.8	2.4	1.2	7.7	976.4
110°	22.1	20.9	18.0	13.0	6.6	1.4	1.1	6.1	982.5
115°	19.0	17.8	15.0	10.4	4.7	1.2	1.1	4.9	987.4
120°	16.0	14.8	12.2	7.9	3.1	1.2	1.0	3.8	991.2
125°	13.0	11.9	9.4	5.6	1.7	1.1	0.9	2.7	993.9
130°	10.1	9.1	6.9	3.7	1.4	1.1	1.0	1.9	995.9
135°	7.3	6.5	4.6	2.1	1.4	1.1	1.1	1.3	997.1
140°	4.8	4.1	2.7	1.7	1.4	1.1	1.1	0.8	998.0
145°	2.6	2.3	1.9	1.7	1.4	1.2	1.2	0.5	998.5
150°	2.0	2.0	1.9	1.6	1.3	1.3	1.3	0.4	998.9
155°	1.9	1.9	1.7	1.6	1.4	1.4	1.4	0.4	999.3
160°	1.7	1.7	1.6	1.4	1.4	1.4	1.4	0.3	999.6
165°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.8
170°	1.3	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.9
175°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Monsun® 21	Order number: 51FB10DP467C3H EAN: 4069025178060	LP number 58939_270
----------------------	--	------------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	20.1	21.8	20.4	22.1	22.4	20.1	21.8	20.4	22.1	22.4
	3H	21.8	23.4	22.2	23.7	24.0	21.4	23.0	21.8	23.3	23.7
	4H	22.6	24.1	23.0	24.4	24.8	22.0	23.4	22.4	23.8	24.1
	6H	23.4	24.7	23.8	25.1	25.5	22.3	23.7	22.7	24.1	24.4
	8H	23.8	25.0	24.2	25.4	25.8	22.5	23.7	22.9	24.1	24.5
	12H	24.1	25.3	24.5	25.7	26.1	22.5	23.7	22.9	24.1	24.5
4H	2H	20.8	22.2	21.2	22.6	23.0	20.8	22.2	21.2	22.6	22.9
	3H	22.7	24.0	23.1	24.3	24.8	22.3	23.6	22.8	24.0	24.4
	4H	23.7	24.8	24.1	25.2	25.6	23.0	24.1	23.4	24.5	24.9
	6H	24.6	25.6	25.0	26.0	26.5	23.5	24.5	23.9	24.9	25.3
	8H	25.0	25.9	25.5	26.4	26.8	23.6	24.5	24.1	25.0	25.4
	12H	25.4	26.2	25.9	26.7	27.2	23.7	24.5	24.2	25.0	25.5
8H	4H	24.0	24.9	24.5	25.4	25.8	23.4	24.3	23.9	24.7	25.2
	6H	25.1	25.9	25.6	26.3	26.8	24.0	24.8	24.5	25.2	25.7
	8H	25.6	26.3	26.1	26.8	27.3	24.2	24.9	24.7	25.4	25.9
	12H	26.2	26.8	26.7	27.2	27.8	24.4	25.0	24.9	25.5	26.0
12H	4H	24.0	24.9	24.5	25.3	25.8	23.5	24.3	24.0	24.8	25.2
	6H	25.2	25.8	25.7	26.3	26.8	24.2	24.8	24.7	25.3	25.8
	8H	25.8	26.4	26.3	26.8	27.4	24.4	25.0	24.9	25.5	26.0

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1590 B = 87		H(C0) = 21 H(C90) = 21		H(C180) = 21 H(C270) = 21	
C-planes	γ	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°			
		Luminance in cd/m²									
	45°	10449.2	10514.0	10590.9	10812.3	11279.0	11903.7	12729.5			
	50°	9910.4	9947.1	10021.4	10174.3	10559.1	11152.3	12057.1			
	55°	9397.4	9408.4	9466.0	9540.6	9838.0	10356.4	11309.9			
	60°	8890.5	8883.0	8898.4	8926.7	9122.7	9550.8	10512.6			
	65°	8444.8	8424.5	8353.2	8300.2	8416.7	8738.9	9677.6			
	70°	8062.1	8016.6	7808.5	7661.0	7674.7	7883.8	8780.5			
	75°	7663.1	7590.8	7299.5	7003.5	6829.7	6900.2	7714.1			
	80°	7240.2	7120.0	6828.2	6301.9	5863.0	5667.9	6308.3			
	85°	6931.7	6784.9	6467.7	5807.7	4936.7	4230.0	4405.6			

Photometric test report

Family
Monsun® 21

Order number: **51FB10DP467C3H**
EAN: **4069025178060**

LP number
58939_270

Luminance values in cd/m²

γ 65°

γ 70°


γ 75°

γ 80°

γ 85°

sit

eco

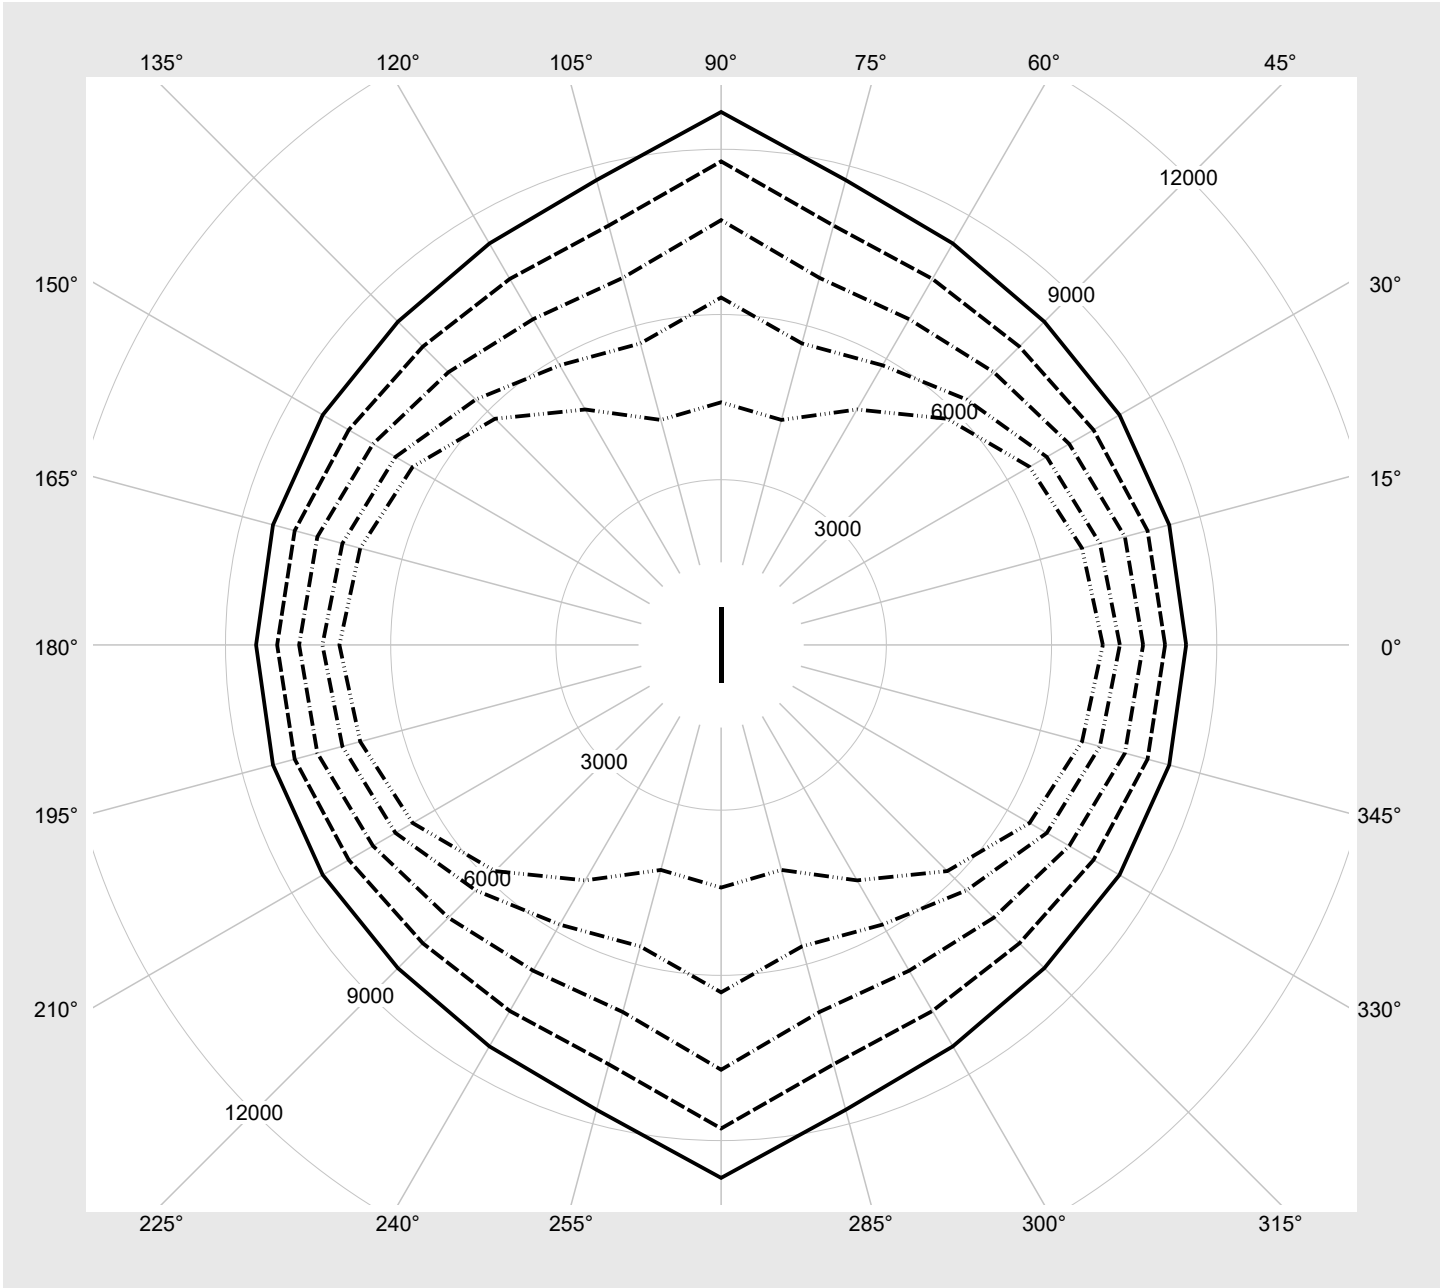

Photometric test report

Family Monsun® 21	Order number: 51FB10DP467C3H EAN: 4069025178060	LP number 58939_270
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	6060	36.5
95	241	252	5763	34.9
90	228	250	5464	33.4
85	214	248	5140	31.8
80	201	245	4837	30.3
75	189	243	4556	29.0
70	176	241	4251	27.4
65	163	238	3944	25.9
60	150	235	3636	24.3
55	137	231	3326	22.7
50	125	228	3038	21.2
45	112	224	2726	19.5
40	99	219	2412	17.8
35	87	215	2121	16.2
30	74	209	1808	14.5
25	62	202	1515	13.0
20	50	194	1221	11.4
15	37	183	901	9.9
10	25	169	605	8.4
5	13	145	308	7.2
3	8	127	184	6.9