

Photometric test report

Family
Monsun® 21

Order number: 51FB10DP660C
EAN: 4069025178169

LP number
58939_237



Version prismatic diffuser, opal, PMMA, wide distribution
Lamps LED 6500 K | CRI ≥ 80
Controlgear ECG-DALI
Rated values Net luminous flux = 6060 lm
Power consumption = 33.7 W
Luminous efficacy = 179.8 lm/W

serial
documentation
06.02.2026


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 340 cd/klm

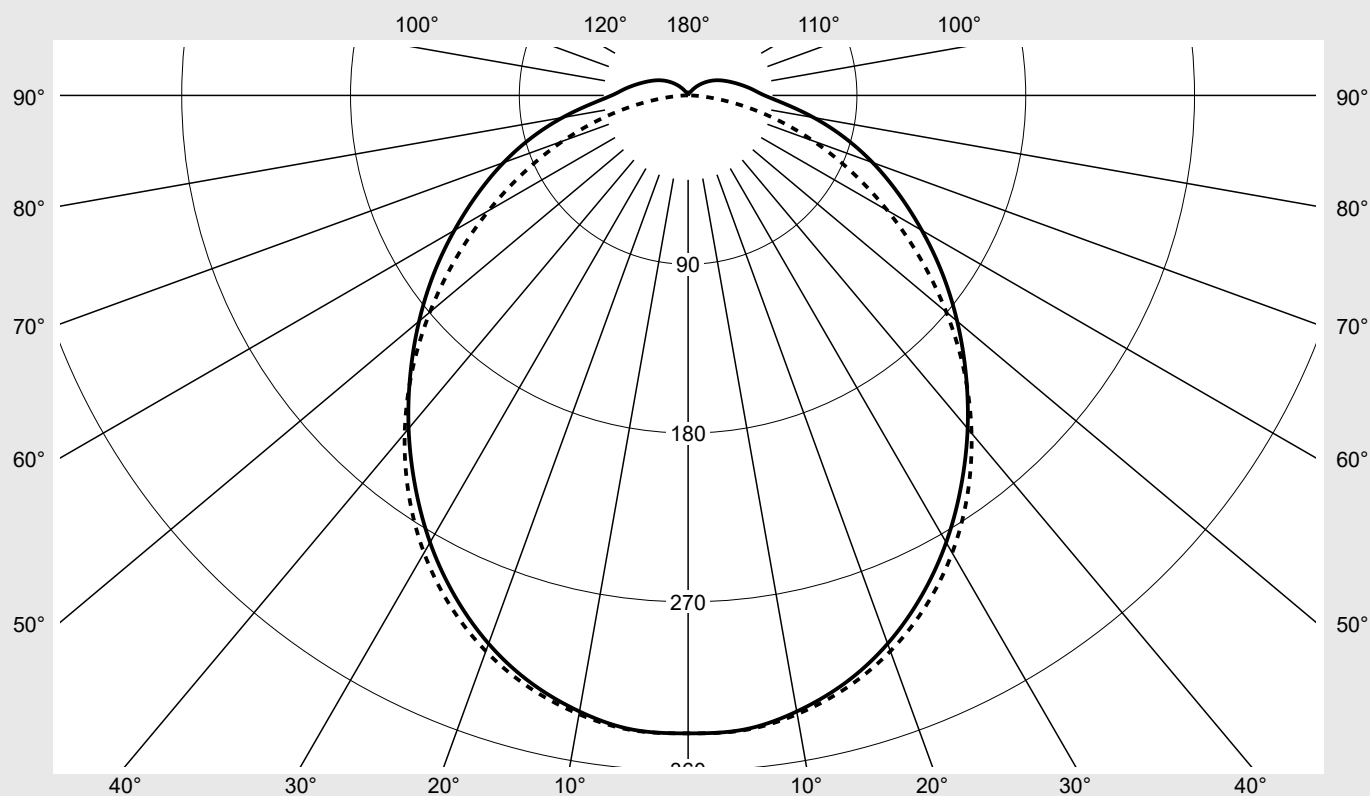

Classifications

DIN 5040 A 4 1
CIE N1=47 N2=77 N3=93
N4=94 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 94.2%
 ϕ_o 5.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 21	Order number: 51FB10DP660C EAN: 4069025178169	LP number 58939_237
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	340.1	340.1	340.1	340.1	340.1	340.1	340.1	2.0	2.0
5°	339.4	338.3	336.5	337.9	339.5	339.4	339.8	16.2	18.2
10°	333.5	333.0	331.2	332.8	334.6	334.7	335.0	31.7	49.9
15°	324.2	324.2	322.5	324.2	326.1	326.4	326.9	46.1	96.0
20°	311.0	311.6	310.1	311.9	314.1	314.7	315.3	58.6	154.6
25°	294.4	295.4	294.1	296.0	298.4	299.4	300.2	68.7	223.4
30°	275.2	276.6	275.1	276.8	279.4	280.7	281.6	76.1	299.5
35°	253.9	255.2	253.8	254.9	257.1	258.4	259.7	80.5	380.0
40°	231.8	232.9	231.3	231.1	232.5	233.8	235.1	81.9	461.9
45°	209.4	209.9	207.8	205.9	206.1	206.6	208.2	80.4	542.4
50°	187.2	187.1	184.8	181.3	179.3	178.3	179.7	76.6	619.0
55°	165.5	164.8	162.1	157.0	153.1	150.2	150.9	70.7	689.7
60°	143.9	142.9	139.5	133.7	127.9	123.2	122.7	63.3	753.0
65°	123.6	122.5	117.8	111.0	104.2	97.9	96.0	54.9	808.0
70°	104.7	103.3	97.1	89.4	81.7	74.3	71.0	45.8	853.8
75°	86.1	84.4	77.8	69.2	60.2	52.2	47.8	36.3	890.0
80°	68.0	66.1	60.2	50.5	40.7	32.1	26.9	26.7	916.7
85°	51.8	50.0	44.6	35.3	24.7	15.7	10.1	18.3	935.0
90°	40.8	39.2	34.4	26.0	15.9	6.9	1.8	13.1	948.2
95°	34.8	33.5	29.7	22.7	13.6	5.1	1.6	11.2	959.3
100°	29.9	28.8	25.4	19.2	11.3	3.7	1.4	9.4	968.7
105°	25.7	24.7	21.4	16.1	8.8	2.4	1.2	7.7	976.4
110°	22.1	20.9	18.0	13.0	6.6	1.4	1.1	6.1	982.5
115°	19.0	17.8	15.0	10.4	4.7	1.2	1.1	4.9	987.4
120°	16.0	14.8	12.2	7.9	3.1	1.2	1.0	3.8	991.2
125°	13.0	11.9	9.4	5.6	1.7	1.1	0.9	2.7	993.9
130°	10.1	9.1	6.9	3.7	1.4	1.1	1.0	1.9	995.9
135°	7.3	6.5	4.6	2.1	1.4	1.1	1.1	1.3	997.1
140°	4.8	4.1	2.7	1.7	1.4	1.1	1.1	0.8	998.0
145°	2.6	2.3	1.9	1.7	1.4	1.2	1.2	0.5	998.5
150°	2.0	2.0	1.9	1.6	1.3	1.3	1.3	0.4	998.9
155°	1.9	1.9	1.7	1.6	1.4	1.4	1.4	0.4	999.3
160°	1.7	1.7	1.6	1.4	1.4	1.4	1.4	0.3	999.6
165°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.8
170°	1.3	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.9
175°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Monsun® 21	Order number: 51FB10DP660C EAN: 4069025178169	LP number 58939_237
----------------------	--	------------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	20.1	21.8	20.4	22.1	22.4	20.1	21.8	20.4	22.1	22.4
	3H	21.8	23.4	22.2	23.7	24.0	21.4	23.0	21.8	23.3	23.7
	4H	22.6	24.1	23.0	24.4	24.8	22.0	23.4	22.4	23.8	24.1
	6H	23.4	24.7	23.8	25.1	25.5	22.3	23.7	22.7	24.1	24.4
	8H	23.8	25.0	24.2	25.4	25.8	22.5	23.7	22.9	24.1	24.5
	12H	24.1	25.3	24.5	25.7	26.1	22.5	23.7	22.9	24.1	24.5
4H	2H	20.8	22.2	21.2	22.6	23.0	20.8	22.2	21.2	22.6	22.9
	3H	22.7	24.0	23.1	24.3	24.8	22.3	23.6	22.8	24.0	24.4
	4H	23.7	24.8	24.1	25.2	25.6	23.0	24.1	23.4	24.5	24.9
	6H	24.6	25.6	25.0	26.0	26.5	23.5	24.5	23.9	24.9	25.3
	8H	25.0	25.9	25.5	26.4	26.8	23.6	24.5	24.1	25.0	25.4
	12H	25.4	26.2	25.9	26.7	27.2	23.7	24.5	24.2	25.0	25.5
8H	4H	24.0	24.9	24.5	25.4	25.8	23.4	24.3	23.9	24.7	25.2
	6H	25.1	25.9	25.6	26.3	26.8	24.0	24.8	24.5	25.2	25.7
	8H	25.6	26.3	26.1	26.8	27.3	24.2	24.9	24.7	25.4	25.9
	12H	26.2	26.8	26.7	27.2	27.8	24.4	25.0	24.9	25.5	26.0
12H	4H	24.0	24.9	24.5	25.3	25.8	23.5	24.3	24.0	24.8	25.2
	6H	25.2	25.8	25.7	26.3	26.8	24.2	24.8	24.7	25.3	25.8
	8H	25.8	26.4	26.3	26.8	27.4	24.4	25.0	24.9	25.5	26.0

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1590 B = 87		H(C0) = 21 H(C90) = 21		H(C180) = 21 H(C270) = 21	
C-planes	γ	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°			
		Luminance in cd/m²									
	45°	10449.2	10514.0	10590.9	10812.3	11279.0	11903.7	12729.5			
	50°	9910.4	9947.1	10021.4	10174.3	10559.1	11152.3	12057.1			
	55°	9397.4	9408.4	9466.0	9540.6	9838.0	10356.4	11309.9			
	60°	8890.5	8883.0	8898.4	8926.7	9122.7	9550.8	10512.6			
	65°	8444.8	8424.5	8353.2	8300.2	8416.7	8738.9	9677.6			
	70°	8062.1	8016.6	7808.5	7661.0	7674.7	7883.8	8780.5			
	75°	7663.1	7590.8	7299.5	7003.5	6829.7	6900.2	7714.1			
	80°	7240.2	7120.0	6828.2	6301.9	5863.0	5667.9	6308.3			
	85°	6931.7	6784.9	6467.7	5807.7	4936.7	4230.0	4405.6			

Photometric test report

Family
Monsun® 21

Order number: 51FB10DP660C
EAN: 4069025178169

LP number
58939_237

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

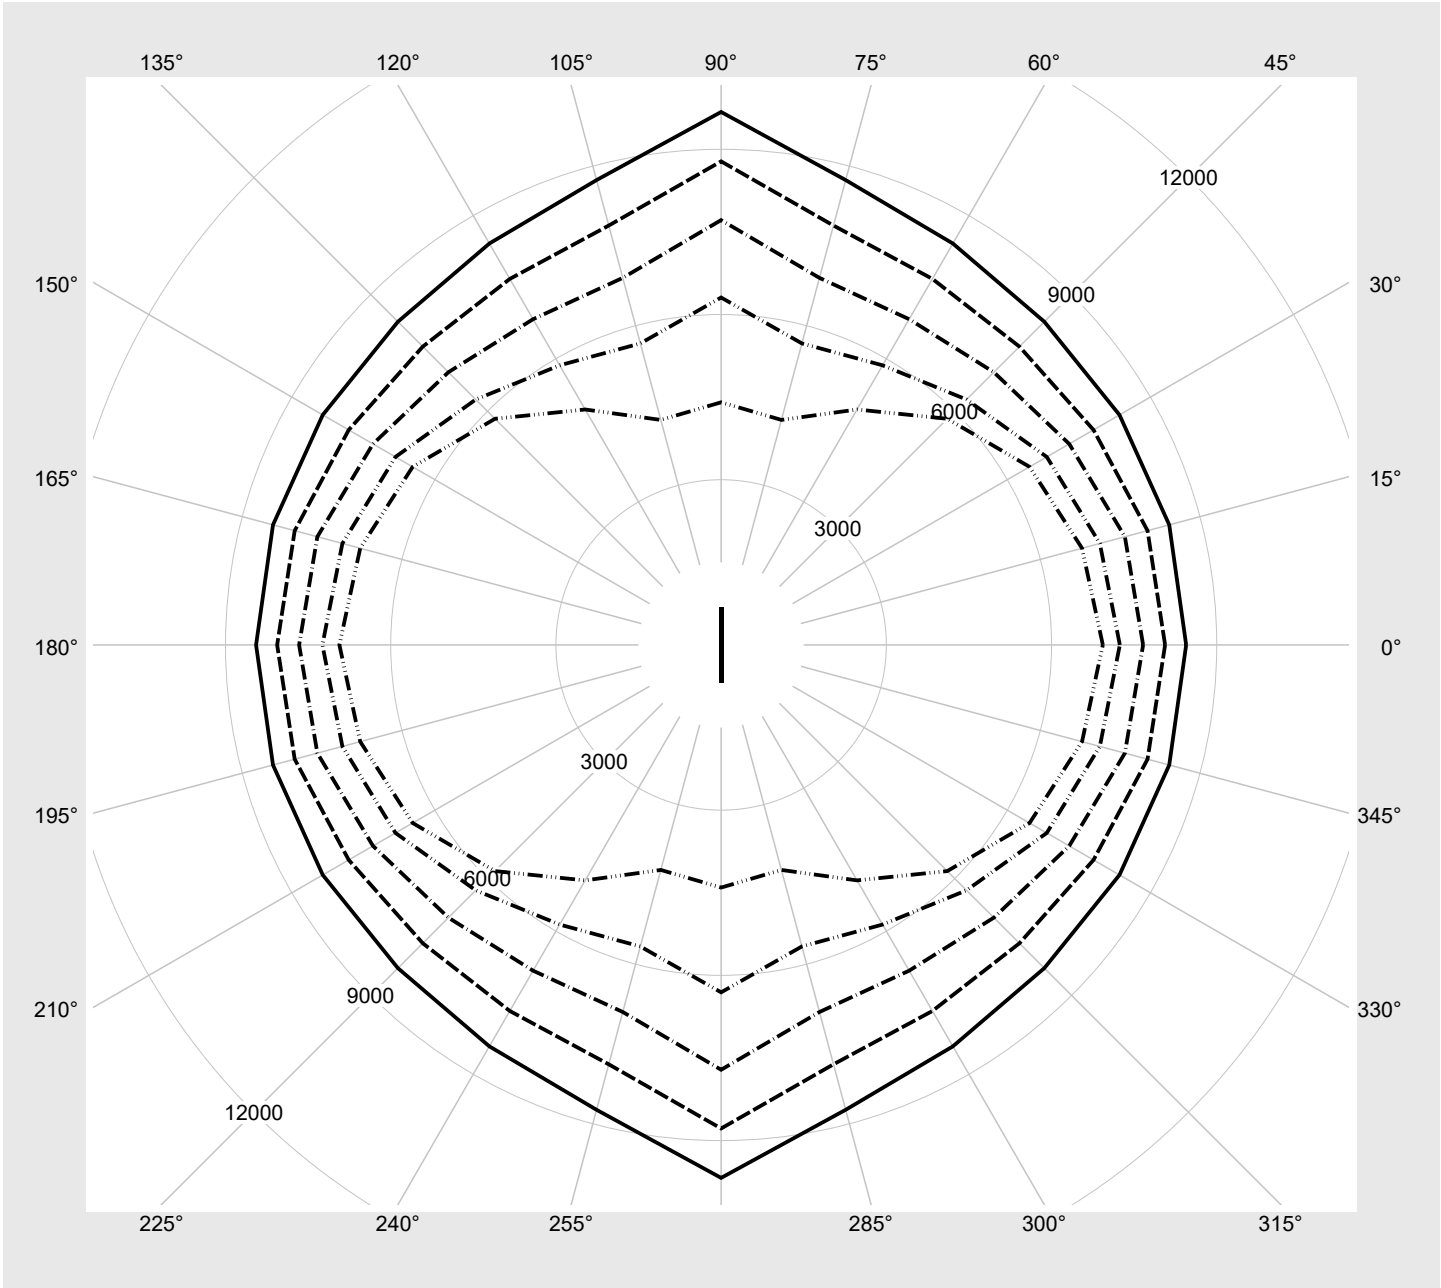

Photometric test report

Family Monsun® 21	Order number: 51FB10DP660C EAN: 4069025178169	LP number 58939_237
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	6060	33.7
95	241	252	5763	32.1
90	227	250	5442	30.3
85	214	248	5141	28.8
80	201	245	4839	27.3
75	188	243	4535	25.8
70	176	241	4253	24.3
65	163	238	3946	22.8
60	150	235	3637	21.2
55	137	231	3327	19.4
50	125	228	3040	17.9
45	112	224	2728	16.2
40	99	219	2414	14.4
35	87	215	2123	12.8
30	74	209	1809	11.0
25	62	202	1516	9.4
20	50	194	1221	7.8
15	37	183	902	6.2
10	25	169	605	4.7
5	13	145	308	3.5
3	7	122	159	3.0