

Photometric test report

Family
Monsun® 21

Order number: 51FB207P660C005
EAN: 4069025178381

LP number
59060_282



Version prismatic diffuser, opal, polycarbonate, wide distribution
Lamps LED 6500 K | CRI ≥ 80
Controlgear ECG
Rated values Net luminous flux = 6180 lm
Power consumption = 40.0 W
Luminous efficacy = 154.5 lm/W

serial
documentation
06.02.2026


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 319 cd/klm

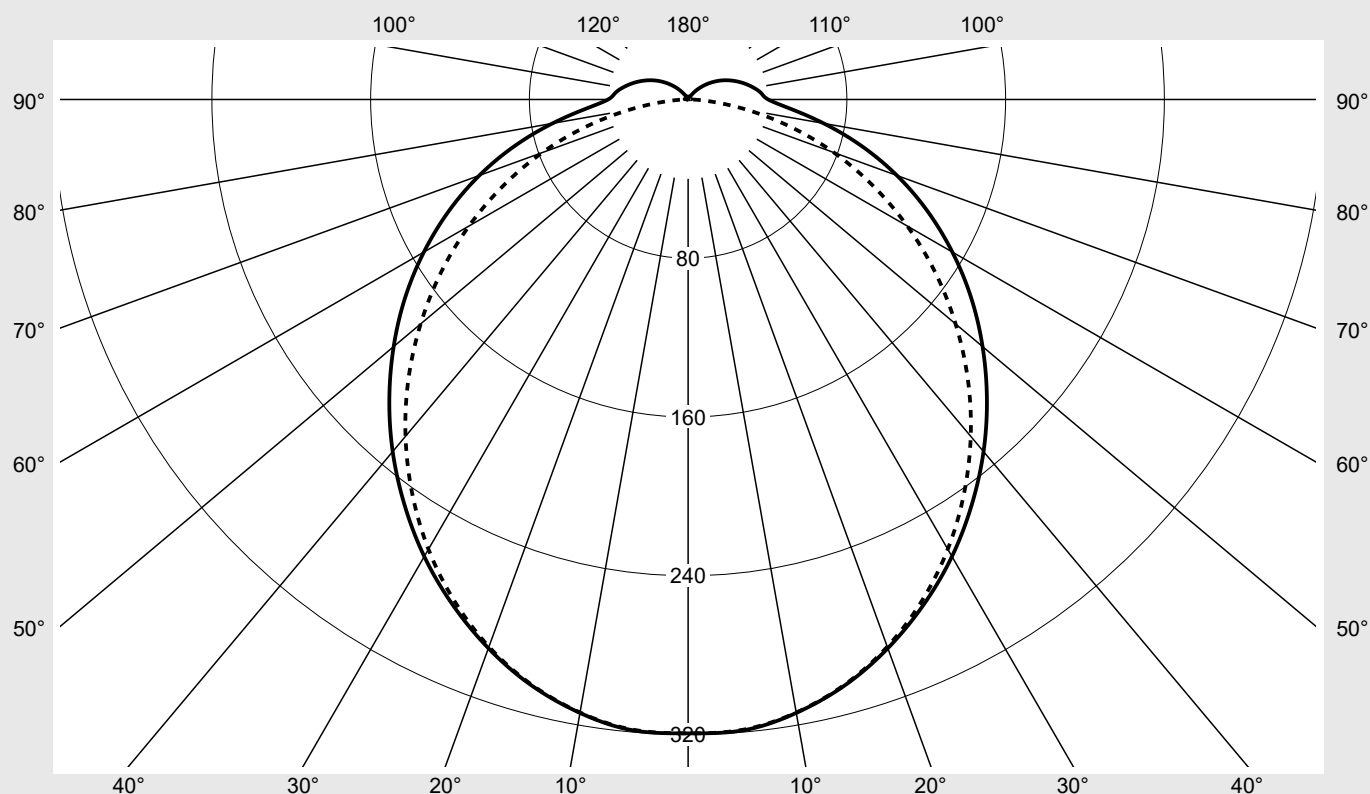

Classifications

DIN 5040 A 4 1
CIE N1=45 N2=75 N3=93
N4=94 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 93.7%
 ϕ_o 6.3%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 21	Order number: 51FB207P660C005 EAN: 4069025178381	LP number 59060_282
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	319.4	319.4	319.4	319.4	319.4	319.4	319.4	1.9	1.9
5°	319.1	317.8	316.0	317.2	318.6	318.6	318.8	15.2	17.1
10°	313.9	312.8	311.0	312.1	313.5	313.5	313.7	29.8	46.9
15°	305.6	304.7	302.7	303.7	305.0	304.9	305.2	43.2	90.1
20°	294.3	293.5	291.4	292.2	293.3	293.1	293.5	54.9	145.0
25°	280.9	280.2	277.7	277.9	278.8	278.5	278.8	64.6	209.6
30°	265.9	265.3	262.4	261.6	261.9	261.4	261.7	72.0	281.6
35°	249.2	248.5	245.6	243.7	242.9	242.2	242.4	77.0	358.5
40°	231.6	230.8	227.5	224.6	222.7	221.4	221.6	79.5	438.0
45°	212.9	211.8	208.5	204.2	201.3	199.0	199.4	79.5	517.5
50°	193.7	192.3	188.8	183.7	179.4	175.9	176.0	77.3	594.9
55°	174.1	172.4	168.8	162.7	157.2	152.3	152.1	73.1	667.9
60°	153.8	152.1	148.1	141.4	134.9	128.8	127.5	66.9	734.9
65°	133.1	131.4	127.0	119.9	112.8	105.5	102.8	59.2	794.0
70°	112.0	110.4	105.0	98.0	90.2	82.2	78.2	49.9	843.9
75°	90.5	88.8	83.0	75.7	67.3	58.8	53.6	39.3	883.2
80°	69.4	67.4	62.0	54.0	45.3	36.4	30.4	28.3	911.6
85°	51.2	49.1	43.8	35.9	26.7	17.7	11.3	18.6	930.2
90°	40.3	38.3	33.0	25.3	16.4	7.5	1.9	12.9	943.1
95°	36.9	35.1	30.2	22.8	14.1	5.6	1.6	11.6	954.7
100°	33.7	31.9	27.1	20.1	11.9	4.0	1.5	10.1	964.8
105°	30.1	28.5	23.8	17.3	9.5	2.6	1.3	8.6	973.4
110°	26.5	24.6	20.5	14.4	7.3	1.5	1.2	7.1	980.4
115°	22.8	21.1	17.3	11.6	5.2	1.3	1.2	5.7	986.1
120°	19.1	17.5	14.1	8.9	3.4	1.3	1.1	4.4	990.5
125°	15.4	13.9	10.8	6.2	1.7	1.2	1.0	3.2	993.6
130°	11.8	10.5	7.7	3.9	1.4	1.2	1.0	2.2	995.8
135°	8.3	7.2	5.0	2.0	1.4	1.2	1.1	1.4	997.2
140°	5.1	4.3	2.5	1.6	1.3	1.1	1.0	0.8	998.0
145°	2.4	2.0	1.8	1.6	1.4	1.2	1.2	0.5	998.5
150°	1.9	1.9	1.8	1.5	1.4	1.3	1.2	0.4	999.0
155°	1.8	1.8	1.6	1.5	1.4	1.3	1.3	0.4	999.3
160°	1.6	1.6	1.5	1.5	1.4	1.4	1.3	0.3	999.6
165°	1.5	1.5	1.4	1.4	1.4	1.4	1.3	0.2	999.8
170°	1.4	1.4	1.4	1.4	1.4	1.4	1.3	0.1	999.9
175°	1.3	1.3	1.3	1.4	1.4	1.4	1.3	0.1	1000.0
180°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.0	1000.0

Photometric test report

Family Monsun® 21		Order number: 51FB207P660C005 EAN: 4069025178381							LP number 59060_282	
UGR-Table		Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)			
x	y									
2H	2H	20.4	22.2	20.8	22.5	22.8	20.2	22.0	20.6	22.3
	3H	22.2	23.8	22.6	24.1	24.5	21.8	23.4	22.2	23.7
	4H	23.1	24.5	23.5	24.9	25.3	22.4	23.9	22.8	24.2
	6H	23.8	25.2	24.2	25.5	25.9	22.8	24.2	23.2	24.6
	8H	24.1	25.4	24.6	25.8	26.2	23.0	24.3	23.4	24.7
	12H	24.4	25.6	24.8	26.0	26.4	23.0	24.3	23.5	24.7
4H	2H	21.2	22.6	21.6	23.0	23.4	21.0	22.5	21.4	22.9
	3H	23.2	24.5	23.6	24.8	25.2	22.8	24.0	23.2	24.4
	4H	24.1	25.3	24.6	25.7	26.1	23.5	24.7	23.9	25.1
	6H	25.0	26.0	25.5	26.4	26.9	24.0	25.1	24.5	25.5
	8H	25.4	26.3	25.9	26.8	27.2	24.2	25.2	24.7	25.6
	12H	25.8	26.6	26.2	27.1	27.5	24.3	25.2	24.8	25.6
8H	4H	24.5	25.4	24.9	25.9	26.3	23.9	24.9	24.4	25.3
	6H	25.5	26.3	26.0	26.8	27.3	24.6	25.4	25.1	25.9
	8H	26.0	26.7	26.5	27.2	27.7	24.9	25.6	25.3	26.0
	12H	26.5	27.1	27.0	27.6	28.1	25.0	25.6	25.5	26.1
12H	4H	24.5	25.4	25.0	25.8	26.3	24.0	24.9	24.5	25.3
	6H	25.6	26.3	26.1	26.8	27.3	24.8	25.4	25.3	25.9
	8H	26.1	26.8	26.7	27.2	27.8	25.1	25.7	25.6	26.1

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1590 B = 87	H(C0) = 21 H(C90) = 21	H(C180) = 21 H(C270) = 21
C-planes	γ	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
			Luminance in cd/m²					
45°		10838.2	10823.3	10835.5	10935.0	11231.4	11692.6	12431.6
50°		10455.9	10425.3	10441.7	10513.8	10773.3	11218.1	12040.8
55°		10084.7	10035.3	10050.3	10080.3	10300.5	10711.5	11626.2
60°		9687.9	9639.0	9635.0	9633.8	9810.4	10180.3	11138.3
65°		9270.7	9218.8	9176.5	9147.5	9289.2	9598.7	10562.8
70°		8796.0	8738.6	8616.5	8563.7	8642.7	8893.2	9853.8
75°		8216.2	8143.0	7940.5	7817.3	7780.7	7926.3	8824.1
80°		7539.9	7406.8	7178.6	6869.0	6657.9	6565.5	7287.5
85°		6988.1	6801.1	6480.8	6012.9	5443.9	4865.3	5040.6

Photometric test report

Family
Monsun® 21

Order number: 51FB207P660C005
EAN: 4069025178381

LP number
59060_282

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

