

Photometric test report

Family
Floodlight FL21 midi

Order number: 5XA7782F5F1A
EAN: 4058352854976

LP number
59367_425



Version mounting bracket
Optic asymmetric distribution PL33T
Cover toughened safety glass
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 33000 lm
 Power consumption = 270.2 W
 Luminous efficacy = 122.1 lm/W

serial
documentation
26.03.2026

siteco

Luminous intensity in cd/klm

C180-0

C240-60


C245-65

C270-90

Imax: 1467 cd/klm

House side

Road side

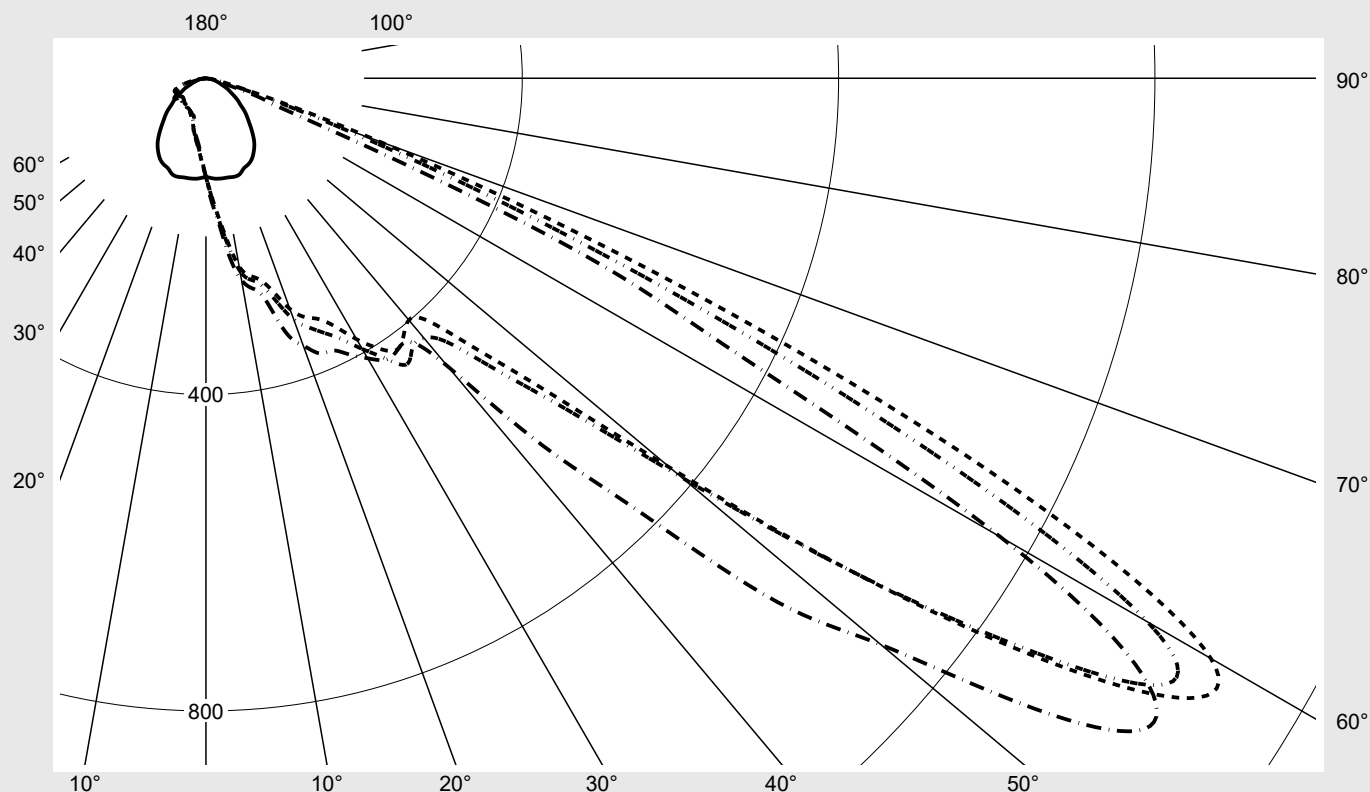

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	277.8
Imax 80°	14.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions


DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782F5F1A EAN: 4058352854976	LP number 59367_425
Envelope curve in cd/klm		

KMK 60°KMK 57.5°KMK 55°KMK 52.5°

siteco

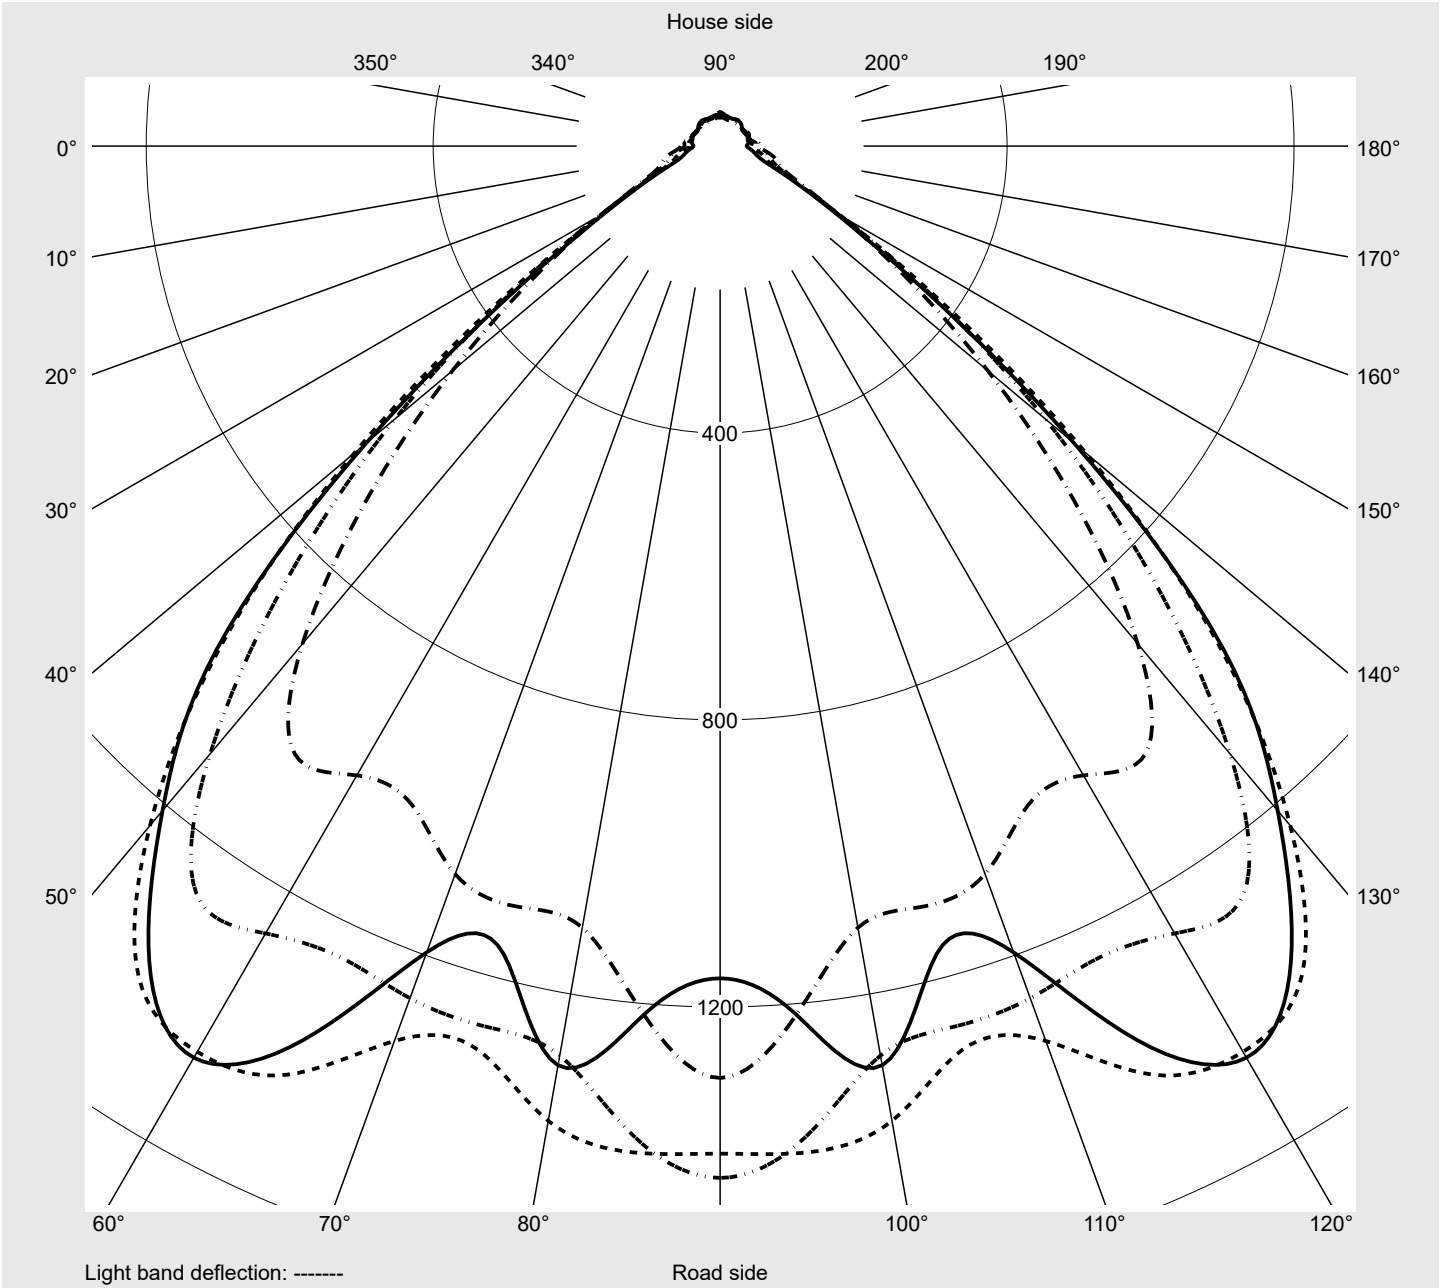

Photometric test report

Family Floodlight FL21 midi		Order number: 5XA7782F5F1A EAN: 4058352854976										LP number 59367_425	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0
2,5°	126.0	127.9	130.1	132.1	134.1	136.1	137.9	139.7	141.4	143.0	144.4	145.7	146.8
5,0°	127.4	131.7	136.0	140.4	144.8	149.1	153.1	157.1	160.7	164.4	168.0	171.1	174.3
7,5°	128.0	134.1	140.1	146.3	152.5	159.1	165.8	172.9	179.9	187.1	194.2	201.2	207.6
10,0°	128.3	135.8	143.6	152.1	161.4	171.8	182.2	193.1	204.0	215.3	225.7	234.5	241.7
12,5°	128.5	137.9	148.6	159.9	172.1	184.7	196.8	209.7	221.9	232.6	241.8	249.2	255.7
15,0°	129.3	140.4	152.8	165.7	178.4	191.1	204.7	218.1	229.6	239.3	247.6	255.9	264.0
17,5°	129.6	141.7	154.8	168.3	181.5	196.0	210.7	224.7	236.5	246.6	257.9	270.3	282.9
20,0°	127.9	141.3	154.8	168.8	183.7	200.6	218.1	234.3	247.7	260.6	277.3	294.2	310.4
22,5°	123.9	138.6	153.7	168.5	185.5	205.4	226.0	242.9	256.9	273.0	294.9	313.1	326.9
25,0°	122.1	134.7	150.3	167.5	186.2	206.8	229.2	247.0	259.9	278.5	301.2	319.1	335.9
27,5°	120.1	131.0	144.2	164.5	184.3	205.2	227.9	248.2	263.1	284.0	309.2	333.6	354.0
30,0°	116.8	126.8	138.2	159.8	181.0	201.7	227.1	254.8	276.1	301.4	331.2	361.6	381.1
32,5°	111.9	122.6	132.7	154.8	177.0	199.1	229.2	262.8	290.9	318.8	353.4	386.1	404.7
35,0°	106.5	117.5	127.8	149.1	171.1	196.3	231.1	266.8	298.5	327.4	365.0	397.2	419.7
37,5°	100.0	109.6	122.0	141.5	164.5	191.8	231.8	265.0	294.0	323.6	358.1	388.6	410.5
40,0°	92.0	99.5	113.7	132.0	155.8	187.3	230.3	261.2	286.1	316.8	354.9	378.6	399.2
42,5°	83.8	90.5	105.1	122.6	145.8	182.4	231.4	262.2	290.4	333.3	375.7	396.6	416.4
45,0°	76.1	82.7	98.5	116.9	139.3	179.2	232.4	267.7	314.3	379.3	438.6	470.3	485.1
47,5°	69.6	76.1	92.0	108.2	127.7	164.2	218.9	269.7	343.7	433.4	529.7	582.5	588.3
50,0°	62.8	66.1	79.0	91.5	104.4	135.5	193.9	273.2	390.2	530.5	686.4	778.0	766.7
52,5°	54.9	60.6	73.3	82.7	93.1	123.2	190.5	310.9	487.2	696.5	905.7	1034.0	1012.9
55,0°	49.5	54.9	67.0	74.4	85.9	117.3	194.4	353.9	591.4	853.5	1106.0	1272.6	1267.3
57,5°	43.2	47.6	57.7	64.6	77.2	111.2	194.4	371.2	665.6	982.8	1236.4	1413.2	1457.8
60,0°	37.0	41.4	47.5	54.3	69.4	108.2	182.7	341.5	643.7	992.8	1209.2	1387.4	1467.3
62,5°	32.5	35.5	39.7	46.4	59.9	95.3	152.5	268.8	504.3	807.0	995.2	1183.6	1229.3
65,0°	27.8	30.4	34.1	40.3	49.2	70.3	109.4	182.8	335.2	551.3	733.1	891.2	858.8
67,5°	21.9	23.1	27.5	33.2	40.6	51.3	71.7	110.4	192.7	322.0	465.3	546.3	495.6
70,0°	18.7	18.6	20.7	27.7	34.9	41.4	52.4	67.9	101.2	159.2	236.5	277.8	230.1
72,5°	15.2	15.6	16.6	21.8	27.3	31.8	36.7	42.5	53.1	70.9	90.4	103.5	89.8
75,0°	12.5	12.9	13.3	16.0	19.3	21.6	24.1	25.0	28.7	32.9	37.6	42.2	37.5
77,5°	9.8	10.5	10.7	12.0	13.5	14.3	14.9	15.1	16.5	18.1	20.2	21.8	20.5
80,0°	8.0	7.6	7.9	9.3	8.8	8.9	8.7	8.9	9.8	10.1	11.6	11.9	11.3
82,5°	6.5	5.4	5.0	5.9	5.5	5.1	4.7	4.9	5.1	5.4	5.9	6.0	5.6
85,0°	3.4	2.7	2.3	2.3	2.2	2.1	2.1	2.1	2.0	2.2	2.4	2.4	2.4
87,5°	0.7	0.7	0.6	0.6	0.7	0.7	0.7	0.8	0.8	0.9	0.9	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 midi		Order number: 5XA7782F5F1A EAN: 4058352854976										LP number 59367_425	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0
2,5°	147.8	148.4	149.1	149.6	150.1	154.8	124.2	122.3	120.5	118.7	117.1	115.5	114.0
5,0°	177.0	179.3	181.1	182.6	183.6	182.6	123.4	119.5	115.8	112.5	109.3	106.5	103.8
7,5°	213.0	217.2	220.6	223.3	225.4	227.0	122.3	116.9	111.7	107.0	102.7	98.9	95.4
10,0°	247.4	251.8	255.1	257.4	258.9	259.2	121.3	114.5	107.9	102.1	96.7	92.0	88.2
12,5°	260.9	264.6	267.3	269.2	270.7	272.3	119.9	111.7	104.1	97.3	91.3	86.4	82.3
15,0°	270.6	276.4	281.6	286.3	289.7	289.5	118.9	109.0	100.6	92.9	85.9	79.7	75.0
17,5°	295.4	307.1	316.9	324.7	330.4	337.6	117.8	105.6	94.7	86.8	80.0	74.2	69.7
20,0°	324.9	335.8	344.5	351.4	357.6	359.7	113.4	101.0	90.6	82.3	74.6	69.3	65.7
22,5°	341.3	354.9	363.5	369.0	373.3	376.6	110.4	97.3	85.9	76.7	70.1	65.1	60.6
25,0°	355.5	373.0	378.7	378.9	379.2	379.8	107.0	92.6	81.7	73.0	66.5	60.4	55.6
27,5°	372.0	389.5	398.2	397.8	393.7	394.0	102.1	87.2	77.5	69.6	62.5	56.2	53.3
30,0°	395.3	409.5	416.1	413.2	409.9	408.8	97.0	82.9	73.3	66.1	58.0	54.0	51.3
32,5°	419.4	428.6	427.7	421.3	419.0	422.0	92.4	78.8	69.3	61.3	55.6	52.3	49.9
35,0°	441.8	438.1	432.5	424.5	420.4	420.8	87.2	73.9	65.4	57.5	53.5	50.9	48.6
37,5°	429.1	438.1	427.8	420.9	418.3	420.1	82.3	69.3	59.4	54.0	51.4	49.0	46.3
40,0°	428.8	447.2	448.5	451.8	469.8	475.6	76.9	63.9	54.8	51.1	48.9	47.4	45.1
42,5°	453.4	493.2	516.7	541.5	583.5	629.2	72.0	58.2	51.2	48.6	47.1	45.7	43.8
45,0°	524.4	587.2	632.1	679.0	742.6	774.8	67.9	54.0	48.3	46.5	45.3	43.7	42.7
47,5°	622.0	701.2	757.2	800.2	893.6	980.7	63.6	50.5	45.8	44.4	43.8	42.2	41.3
50,0°	785.4	866.2	904.9	931.3	1038.8	1114.2	58.9	47.5	42.8	42.6	42.1	40.8	39.6
52,5°	1014.5	1079.9	1097.3	1106.3	1215.8	1299.0	53.5	45.6	41.6	41.8	41.0	39.5	38.7
55,0°	1248.6	1264.1	1270.2	1287.4	1385.0	1438.3	49.9	44.6	42.2	43.1	43.4	40.6	39.8
57,5°	1428.3	1327.5	1304.2	1379.7	1408.0	1404.5	44.4	42.4	41.6	42.8	41.7	40.6	39.1
60,0°	1375.0	1196.0	1166.0	1301.1	1215.0	1160.1	39.1	39.5	39.7	40.3	39.1	38.2	37.8
62,5°	1067.0	911.0	916.3	978.6	898.4	768.5	33.5	36.1	37.1	36.9	36.7	36.1	36.5
65,0°	696.2	580.9	594.1	585.1	555.5	521.5	29.7	32.7	34.0	33.9	33.3	34.1	35.8
67,5°	381.0	323.8	299.1	240.8	204.0	163.4	26.0	28.0	29.8	29.4	30.4	31.7	34.1
70,0°	171.4	154.0	129.5	82.3	72.3	77.2	20.7	22.1	22.8	24.0	27.6	28.8	30.9
72,5°	70.6	64.7	51.8	39.4	35.7	32.9	16.5	17.7	19.0	20.1	23.9	25.1	26.2
75,0°	33.1	31.3	26.2	22.6	20.4	21.1	13.1	14.3	15.4	16.8	19.8	20.9	21.0
77,5°	19.0	17.7	15.5	14.0	13.0	12.3	10.1	11.3	12.1	13.1	14.8	16.3	15.9
80,0°	10.1	9.6	9.0	8.6	8.2	8.3	7.8	8.3	8.7	9.5	10.8	11.9	12.0
82,5°	5.0	4.9	4.8	4.7	4.7	4.5	6.0	6.4	6.6	6.7	7.6	8.1	8.6
85,0°	2.3	2.3	2.3	2.3	2.3	2.4	3.1	2.9	3.4	3.2	3.2	3.4	3.8
87,5°	1.1	1.1	1.2	1.2	1.2	1.2	0.7	0.8	0.9	1.0	1.0	1.0	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 midi				Order number: 5XA7782F5F1A EAN: 4058352854976								LP number 59367_425			
Table of values for luminous intensities												Maximum luminous intensity		sīteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone		
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm			
0,0°	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	125.0	0.2	0.2		
2,5°	112.6	111.3	110.1	109.1	108.2	107.4	106.8	106.4	106.0	105.7	105.6	1.5	1.7		
5,0°	101.4	99.2	97.3	95.6	94.2	93.0	92.1	91.4	90.8	90.3	90.2	3.2	4.9		
7,5°	92.4	89.9	87.8	86.0	84.4	83.2	82.2	81.5	81.0	80.5	80.4	5.0	9.9		
10,0°	85.0	82.4	80.3	78.5	76.9	75.6	74.7	74.1	73.8	73.6	73.6	7.0	16.9		
12,5°	79.0	76.3	73.9	71.9	70.4	69.4	68.7	68.4	68.3	68.0	67.8	9.0	25.9		
15,0°	71.6	68.7	65.9	63.8	62.4	61.2	60.0	59.1	58.7	58.8	59.0	10.8	36.7		
17,5°	66.4	63.4	60.8	57.3	55.6	54.9	54.1	53.1	51.8	50.8	50.7	13.0	49.7		
20,0°	62.3	57.5	55.0	53.8	53.1	51.9	51.2	50.0	49.5	49.2	49.1	15.3	65.0		
22,5°	56.0	53.7	52.3	51.1	50.0	49.3	48.0	47.5	47.4	47.4	47.3	17.5	82.4		
25,0°	53.4	51.5	49.8	48.5	47.7	46.2	45.6	45.4	45.5	45.7	46.0	19.4	101.8		
27,5°	51.2	49.3	47.3	46.2	44.4	44.0	44.0	44.0	44.4	44.9	45.0	21.5	123.3		
30,0°	49.7	47.1	45.7	44.1	43.2	42.8	42.8	43.0	43.3	43.8	44.0	23.8	147.1		
32,5°	47.6	46.2	45.0	42.8	42.0	42.0	42.1	42.4	43.0	43.3	44.0	26.1	173.3		
35,0°	46.1	45.1	43.5	42.3	41.9	41.8	41.7	42.2	43.0	43.7	43.7	28.1	201.4		
37,5°	45.5	44.5	42.8	42.0	41.9	41.9	41.8	41.9	41.9	42.3	42.4	29.2	230.6		
40,0°	44.5	43.5	42.3	41.7	41.6	41.4	41.2	41.1	41.4	41.8	41.9	30.9	261.5		
42,5°	43.3	42.3	41.1	40.8	40.5	40.4	40.4	40.4	40.6	41.2	41.0	34.7	296.2		
45,0°	42.1	41.3	40.0	39.6	39.3	39.3	39.5	39.6	39.9	40.9	40.7	40.9	337.1		
47,5°	40.0	39.7	39.6	38.7	38.5	38.3	38.7	38.8	39.4	39.2	42.1	48.3	385.5		
50,0°	38.8	38.0	38.6	39.1	38.0	37.8	38.1	37.9	38.8	39.7	39.2	58.1	443.6		
52,5°	38.6	38.1	38.5	38.6	38.2	38.2	38.0	37.9	38.9	39.7	39.5	72.5	516.0		
55,0°	39.1	39.4	40.2	41.2	40.6	40.0	39.6	40.1	41.6	43.5	44.9	87.3	603.3		
57,5°	39.8	41.9	43.1	44.0	43.0	41.9	41.9	42.7	44.3	45.7	47.6	96.4	699.8		
60,0°	39.6	41.9	43.3	43.8	42.8	41.8	41.8	42.6	43.6	44.1	44.2	93.2	793.0		
62,5°	39.2	42.0	43.8	43.5	42.2	41.5	42.2	42.5	41.3	40.0	39.5	76.3	869.3		
65,0°	39.0	42.0	44.0	43.1	42.1	42.4	43.6	42.5	40.5	38.5	39.4	54.2	923.5		
67,5°	37.5	40.5	42.2	42.2	42.1	42.9	43.3	41.5	39.3	38.8	38.6	32.2	955.7		
70,0°	34.0	37.3	36.0	37.9	39.5	41.1	41.7	39.8	38.6	38.2	37.3	18.0	973.7		
72,5°	26.8	27.6	29.6	32.0	34.7	36.6	37.2	35.6	34.1	33.6	31.3	10.1	983.7		
75,0°	21.5	22.3	24.2	26.7	29.5	31.7	31.1	27.1	25.2	23.4	22.2	6.3	990.1		
77,5°	16.0	15.8	18.0	19.1	22.8	23.5	22.6	20.7	17.5	14.1	12.6	4.3	994.4		
80,0°	10.3	10.4	11.8	12.5	13.4	14.1	14.0	12.8	10.7	10.6	10.0	2.8	997.1		
82,5°	7.4	7.4	8.2	8.8	8.4	9.5	9.4	8.5	7.8	8.2	8.1	1.8	998.9		
85,0°	3.6	3.8	4.0	4.4	4.0	4.0	4.1	4.0	3.6	3.7	3.8	0.8	999.7		
87,5°	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	1.9	1.9	0.3	1000.0		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782F5F1A EAN: 4058352854976	LP number 59367_425
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	33000	270.2	286.6	278.4
95	241	252	31311	251.7	266.7	259.2
90	229	250	29752	235.3	249.3	242.3
85	216	248	28063	218.2	231.1	224.6
80	203	246	26374	201.9	213.8	207.8
75	190	243	24685	186.3	197.0	191.6
70	178	241	23126	172.4	182.3	177.4
65	165	238	21437	157.7	166.8	162.2
60	152	235	19748	143.6	151.7	147.6
55	140	232	18189	130.9	138.3	134.6
50	127	229	16500	117.5	124.1	120.8
45	114	225	14811	104.2	110.4	107.3
40	102	221	13252	92.5	97.6	95.0
35	89	216	11563	80.0	84.4	82.2
30	76	210	9874	67.9	71.6	69.8
25	63	203	8185	56.3	59.2	57.8
20	51	195	6626	45.8	48.1	47.0
15	38	184	4937	34.7	36.5	35.6
12	31	177	4028	28.9	30.3	29.6