

Photometric test report

Family Spot 21 Performance

Order number: 51SD33DB11C3B
EAN: 4069025538703

LP number
59945_11



Version	housing, black, reflector, cover glass, transparent, medium distribution
Lamps	LED 3500 K CRI ≥ 90
Controlgear	ECG-DALI-Multilumen
Setting	factory setting: DIP-Step=7
Rated values	Net luminous flux = 3010 lm Power consumption = 20.4 W Luminous efficacy = 147.5 lm/W


serial
documentation
11.05.2026

sitEco

Luminous intensity in cd/klm

C180-0

Imax: 2875 cd/klm

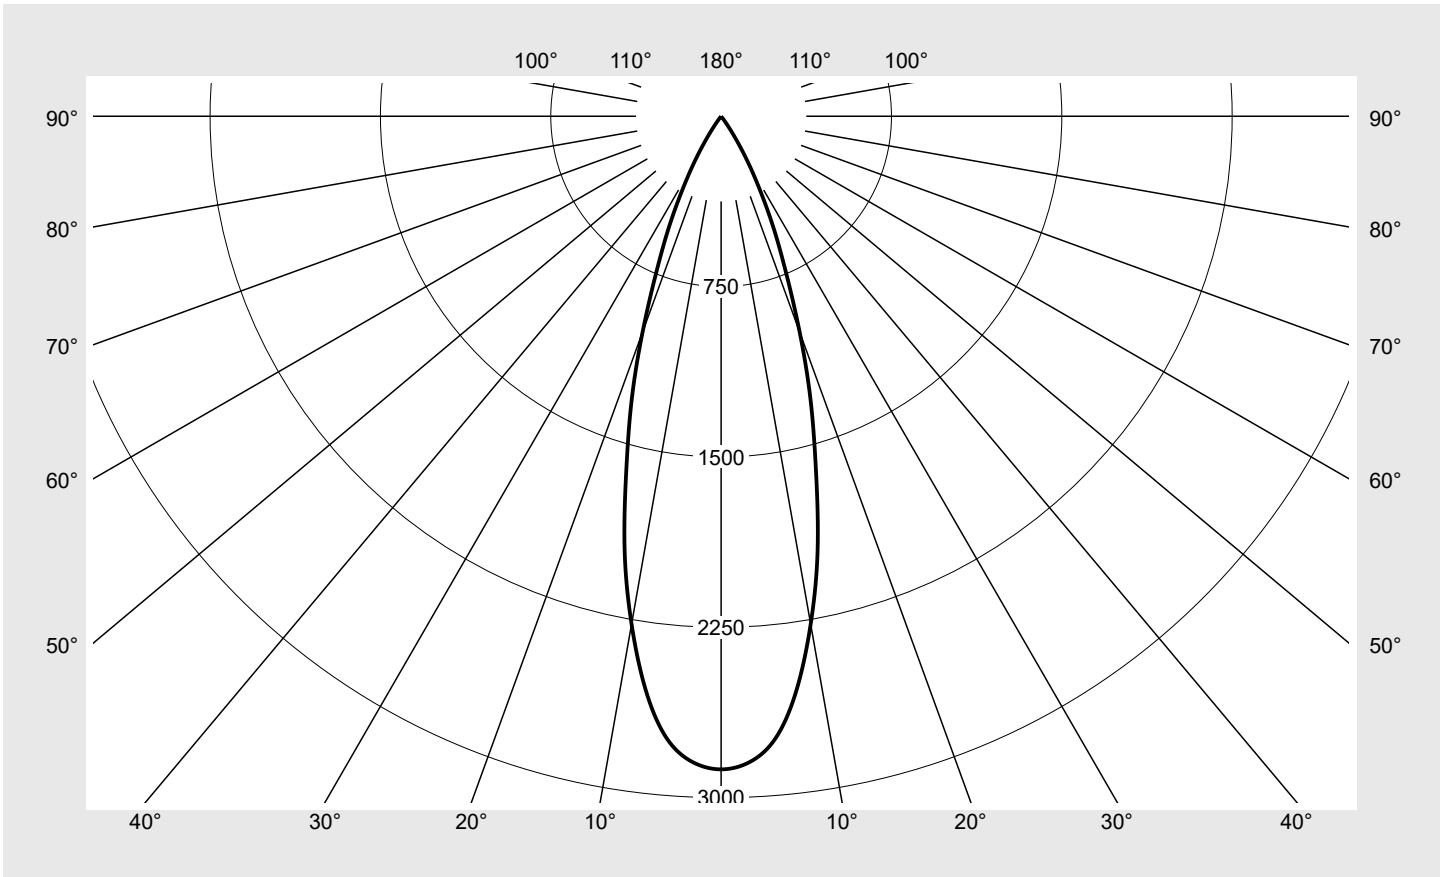

Classifications

DIN 5040	A 8 0
CIE	N1=99 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios

η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Performance	Order number: 51SD33DB11C3B EAN: 4069025538703	LP number 59945_11
--------------------------------------	---	------------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2875.4	4.3	4.3
2,5°	2846.8	34.0	38.3
5,0°	2749.2	65.7	104.0
7,5°	2546.8	91.1	195.2
10,0°	2270.6	108.1	303.2
12,5°	1962.1	116.4	419.7
15,0°	1613.1	114.4	534.1
17,5°	1309.8	108.0	642.1
20,0°	1010.8	94.8	736.9
22,5°	749.1	78.6	815.4
25,0°	553.8	64.2	879.6
27,5°	382.5	48.4	928.0
30,0°	247.7	34.0	962.0
32,5°	136.4	20.1	982.0
35,0°	55.9	8.8	990.8
37,5°	13.7	2.3	993.1
40,0°	8.1	1.4	994.5
42,5°	5.6	1.0	995.6
45,0°	4.1	0.8	996.4
47,5°	3.1	0.6	997.0
50,0°	2.4	0.5	997.5
52,5°	2.0	0.4	998.0
55,0°	1.8	0.4	998.4
57,5°	1.7	0.4	998.8
60,0°	1.4	0.3	999.1
62,5°	1.1	0.3	999.4
65,0°	0.9	0.2	999.6
67,5°	0.7	0.2	999.8
70,0°	0.5	0.1	999.9
72,5°	0.3	0.1	1000.0
75,0°	0.1	0.0	1000.0
77,5°	0.0	0.0	1000.0
80,0°	0.0	0.0	1000.0
82,5°	0.0	0.0	1000.0
85,0°	0.0	0.0	1000.0
87,5°	0.0	0.0	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Performance	Order number: 51SD33DB11C3B EAN: 4069025538703	LP number 59945_11
--------------------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	12.7	13.6	13.0	13.9	14.3	12.7	13.6	13.0	13.9	14.3
	3H	12.5	13.3	12.9	13.7	14.0	12.5	13.3	12.9	13.7	14.0
	4H	12.4	13.2	12.8	13.5	13.9	12.4	13.2	12.8	13.5	13.9
	6H	12.3	13.0	12.8	13.4	13.8	12.3	13.0	12.8	13.4	13.8
	8H	12.4	12.9	12.9	13.3	13.7	12.4	12.9	12.9	13.3	13.7
	12H	12.4	12.8	12.8	13.2	13.6	12.4	12.8	12.8	13.2	13.6
4H	2H	12.4	13.2	12.8	13.5	13.9	12.4	13.2	12.8	13.5	13.9
	3H	12.2	12.8	12.7	13.2	13.6	12.2	12.8	12.7	13.2	13.6
	4H	12.1	12.6	12.5	13.1	13.5	12.1	12.6	12.5	13.1	13.5
	6H	12.0	12.4	12.5	12.9	13.4	12.0	12.4	12.5	12.9	13.4
	8H	12.0	12.3	12.4	12.8	13.3	12.0	12.3	12.4	12.8	13.3
	12H	11.9	12.2	12.4	12.7	13.2	11.9	12.2	12.4	12.7	13.2
8H	4H	12.0	12.3	12.4	12.8	13.3	12.0	12.3	12.4	12.8	13.3
	6H	11.8	12.1	12.3	12.6	13.1	11.8	12.1	12.3	12.6	13.1
	8H	11.7	12.0	12.2	12.5	13.0	11.7	12.0	12.2	12.5	13.0
	12H	11.7	11.9	12.2	12.4	12.9	11.7	11.9	12.2	12.4	12.9
12H	4H	11.9	12.2	12.4	12.7	13.2	11.9	12.2	12.4	12.7	13.2
	6H	11.8	12.0	12.3	12.5	13.0	11.8	12.0	12.3	12.5	13.0
	8H	11.7	11.9	12.2	12.4	12.9	11.7	11.9	12.2	12.4	12.9

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
------------------------	---	---

C-planes	0°
γ	Luminance in cd/m²
45,0°	3318.5
50,0°	2137.0
55,0°	1795.6
60,0°	1602.7
65,0°	1219.2
70,0°	836.6
75,0°	220.2
80,0°	0.0
85,0°	0.0


Photometric test report

Family Spot 21 Performance	Order number: 51SD33DB11C3B EAN: 4069025538703	LP number 59945_11
--------------------------------------	---	------------------------------



Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

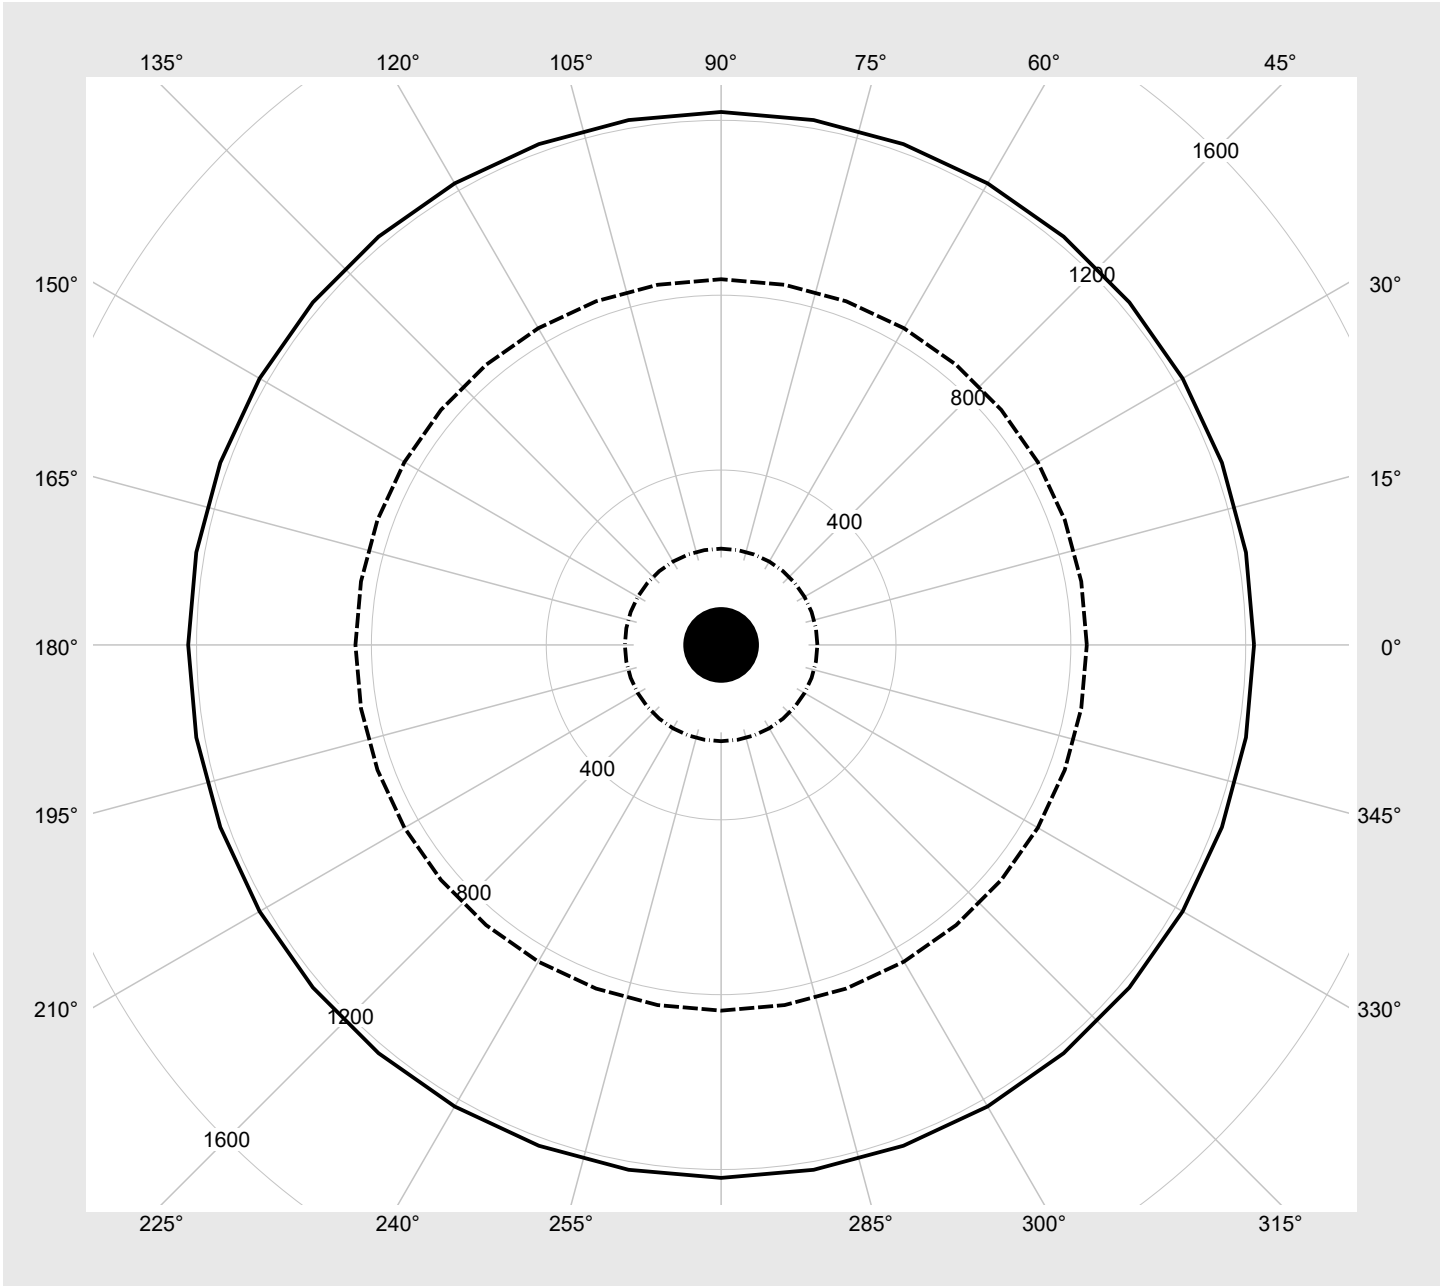

Photometric test report

Family Spot 21 Performance	Order number: 51SD33DB11C3B EAN: 4069025538703	LP number 59945_11
--------------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
11	ON	OFF	ON	ON	4120	28.6
10	ON	OFF	ON	OFF	3850	26.4
9	ON	OFF	OFF	ON	3570	24.4
8	ON	OFF	OFF	OFF	3290	22.3
7	OFF	ON	ON	ON	3010	20.4
6	OFF	ON	ON	OFF	2720	18.3
5	OFF	ON	OFF	ON	2430	16.2
4	OFF	ON	OFF	OFF	2130	14.3
3	OFF	OFF	ON	ON	1830	12.2
2	OFF	OFF	ON	OFF	1530	10.4
1	OFF	OFF	OFF	ON	1220	8.5
0	OFF	OFF	OFF	OFF	910	6.6