




Photometric test report

Family Spot 21 Performance	Order number: 51SD34MB11B3B EAN: 4069025538970	LP number 59946_7										
	<table border="0"> <tr> <td>Version</td> <td>housing, black, reflector, cover glass, transparent, wide distribution</td> </tr> <tr> <td>Lamps</td> <td>LED 3000 K CRI ≥ 90</td> </tr> <tr> <td>Controlgear</td> <td>ECG Multilumen</td> </tr> <tr> <td>Setting</td> <td>factory setting: DIP-Step=4</td> </tr> <tr> <td>Rated values</td> <td>Net luminous flux = 2980 lm Power consumption = 19.1 W Luminous efficacy = 156 lm/W</td> </tr> </table>	Version	housing, black, reflector, cover glass, transparent, wide distribution	Lamps	LED 3000 K CRI ≥ 90	Controlgear	ECG Multilumen	Setting	factory setting: DIP-Step=4	Rated values	Net luminous flux = 2980 lm Power consumption = 19.1 W Luminous efficacy = 156 lm/W	serial documentation 11.05.2026 
Version	housing, black, reflector, cover glass, transparent, wide distribution											
Lamps	LED 3000 K CRI ≥ 90											
Controlgear	ECG Multilumen											
Setting	factory setting: DIP-Step=4											
Rated values	Net luminous flux = 2980 lm Power consumption = 19.1 W Luminous efficacy = 156 lm/W											

Luminous intensity in cd/klm C180-0 **Imax: 1937 cd/klm**

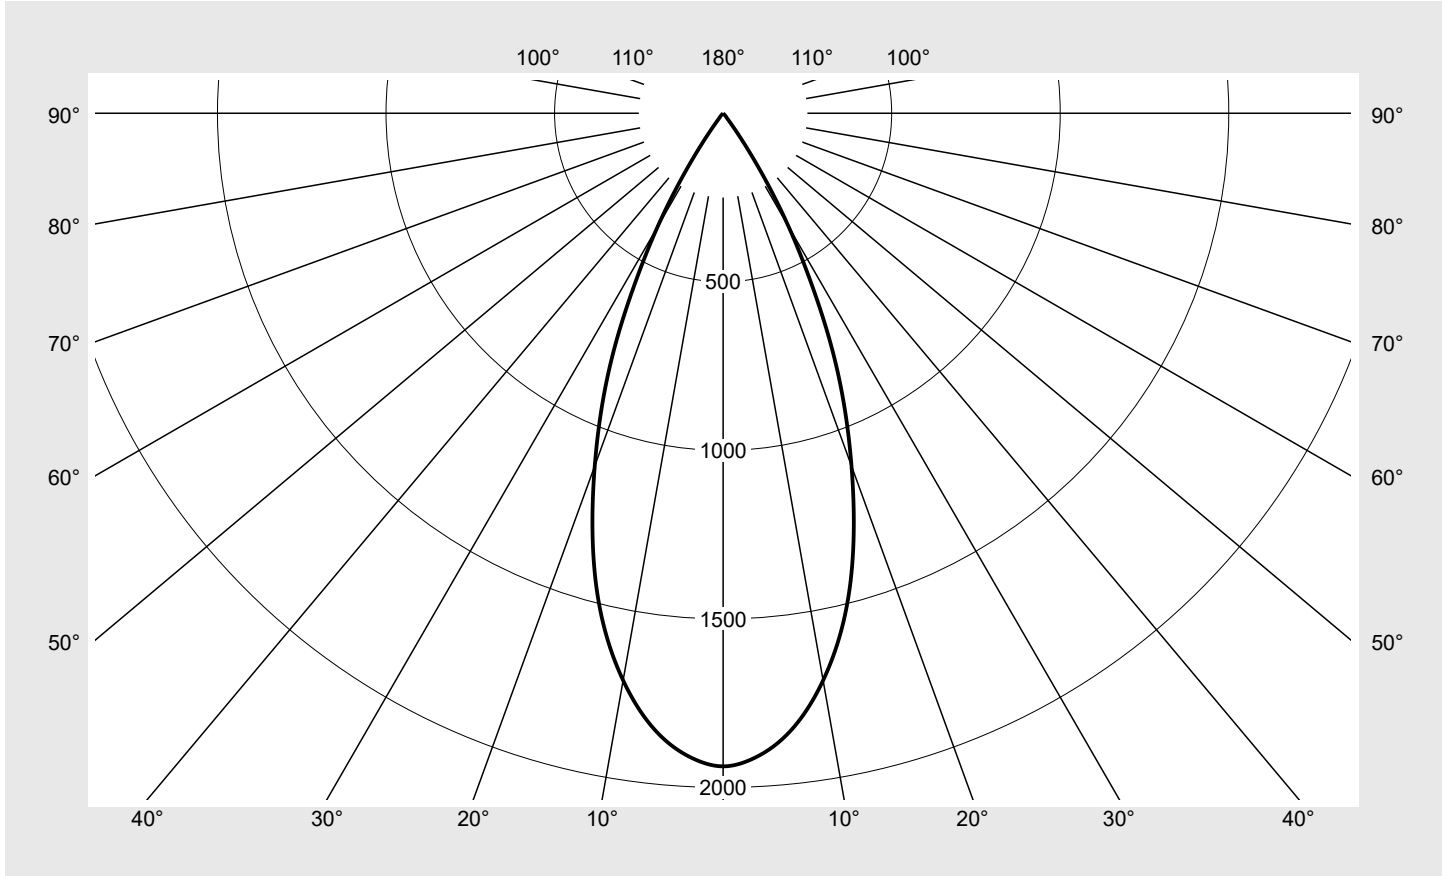

Classifications	
DIN 5040	A 8 0
CIE	N1=99 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Performance	Order number: 51SD34MB11B3B EAN: 4069025538970	LP number 59946_7
--------------------------------------	---	-----------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0,0°	1937.4	2.9	2.9
2,5°	1918.5	22.9	25.8
5,0°	1874.2	44.8	70.6
7,5°	1803.7	64.5	135.2
10,0°	1708.3	81.3	216.5
12,5°	1592.6	94.5	311.0
15,0°	1453.4	103.1	414.1
17,5°	1289.1	106.3	520.4
20,0°	1113.4	104.4	624.7
22,5°	938.6	98.5	723.2
25,0°	755.5	87.5	810.7
27,5°	560.7	71.0	881.7
30,0°	388.9	53.3	935.0
32,5°	229.8	33.8	968.9
35,0°	101.6	16.0	984.8
37,5°	29.4	4.9	989.7
40,0°	14.2	2.5	992.2
42,5°	9.4	1.7	994.0
45,0°	6.8	1.3	995.3
47,5°	5.0	1.0	996.3
50,0°	3.8	0.8	997.1
52,5°	2.9	0.6	997.8
55,0°	2.3	0.5	998.3
57,5°	1.9	0.4	998.7
60,0°	1.5	0.4	999.1
62,5°	1.2	0.3	999.4
65,0°	0.9	0.2	999.6
67,5°	0.7	0.2	999.8
70,0°	0.5	0.1	999.9
72,5°	0.3	0.1	1000.0
75,0°	0.1	0.0	1000.0
77,5°	0.0	0.0	1000.0
80,0°	0.0	0.0	1000.0
82,5°	0.0	0.0	1000.0
85,0°	0.0	0.0	1000.0
87,5°	0.0	0.0	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Performance	Order number: 51SD34MB11B3B EAN: 4069025538970	LP number 59946_7
--------------------------------------	---	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	16.2	17.2	16.6	17.6	17.9	16.2	17.2	16.6	17.6	17.9
	3H	16.1	16.9	16.4	17.3	17.6	16.1	16.9	16.4	17.3	17.6
	4H	16.0	16.8	16.4	17.1	17.5	16.0	16.8	16.4	17.1	17.5
	6H	15.9	16.6	16.3	17.0	17.4	15.9	16.6	16.3	17.0	17.4
	8H	16.0	16.5	16.4	16.9	17.3	16.0	16.5	16.4	16.9	17.3
	12H	16.0	16.4	16.4	16.8	17.2	16.0	16.4	16.4	16.8	17.2
4H	2H	16.0	16.8	16.4	17.1	17.5	16.0	16.8	16.4	17.1	17.5
	3H	15.8	16.4	16.2	16.8	17.2	15.8	16.4	16.2	16.8	17.2
	4H	15.6	16.2	16.1	16.7	17.1	15.6	16.2	16.1	16.7	17.1
	6H	15.5	16.0	16.0	16.5	17.0	15.5	16.0	16.0	16.5	17.0
	8H	15.5	15.9	16.0	16.4	16.9	15.5	15.9	16.0	16.4	16.9
	12H	15.5	15.8	16.0	16.3	16.8	15.5	15.8	16.0	16.3	16.8
8H	4H	15.5	15.9	16.0	16.4	16.9	15.5	15.9	16.0	16.4	16.9
	6H	15.4	15.7	15.9	16.2	16.7	15.4	15.7	15.9	16.2	16.7
	8H	15.3	15.6	15.8	16.1	16.6	15.3	15.6	15.8	16.1	16.6
	12H	15.3	15.5	15.8	16.0	16.6	15.3	15.5	15.8	16.0	16.6
12H	4H	15.5	15.8	16.0	16.3	16.8	15.5	15.8	16.0	16.3	16.8
	6H	15.4	15.6	15.9	16.1	16.6	15.4	15.6	15.9	16.1	16.6
	8H	15.3	15.5	15.8	16.0	16.6	15.3	15.5	15.8	16.0	16.6


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
------------------------	---	---

C-planes	0°
γ	Luminance in cd/m²
45,0°	5440.9
50,0°	3344.7
55,0°	2268.6
60,0°	1697.4
65,0°	1204.4
70,0°	826.6
75,0°	218.0
80,0°	0.0
85,0°	0.0

Photometric test report

Family Spot 21 Performance	Order number: 51SD34MB11B3B EAN: 4069025538970	LP number 59946_7
--------------------------------------	---	-----------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

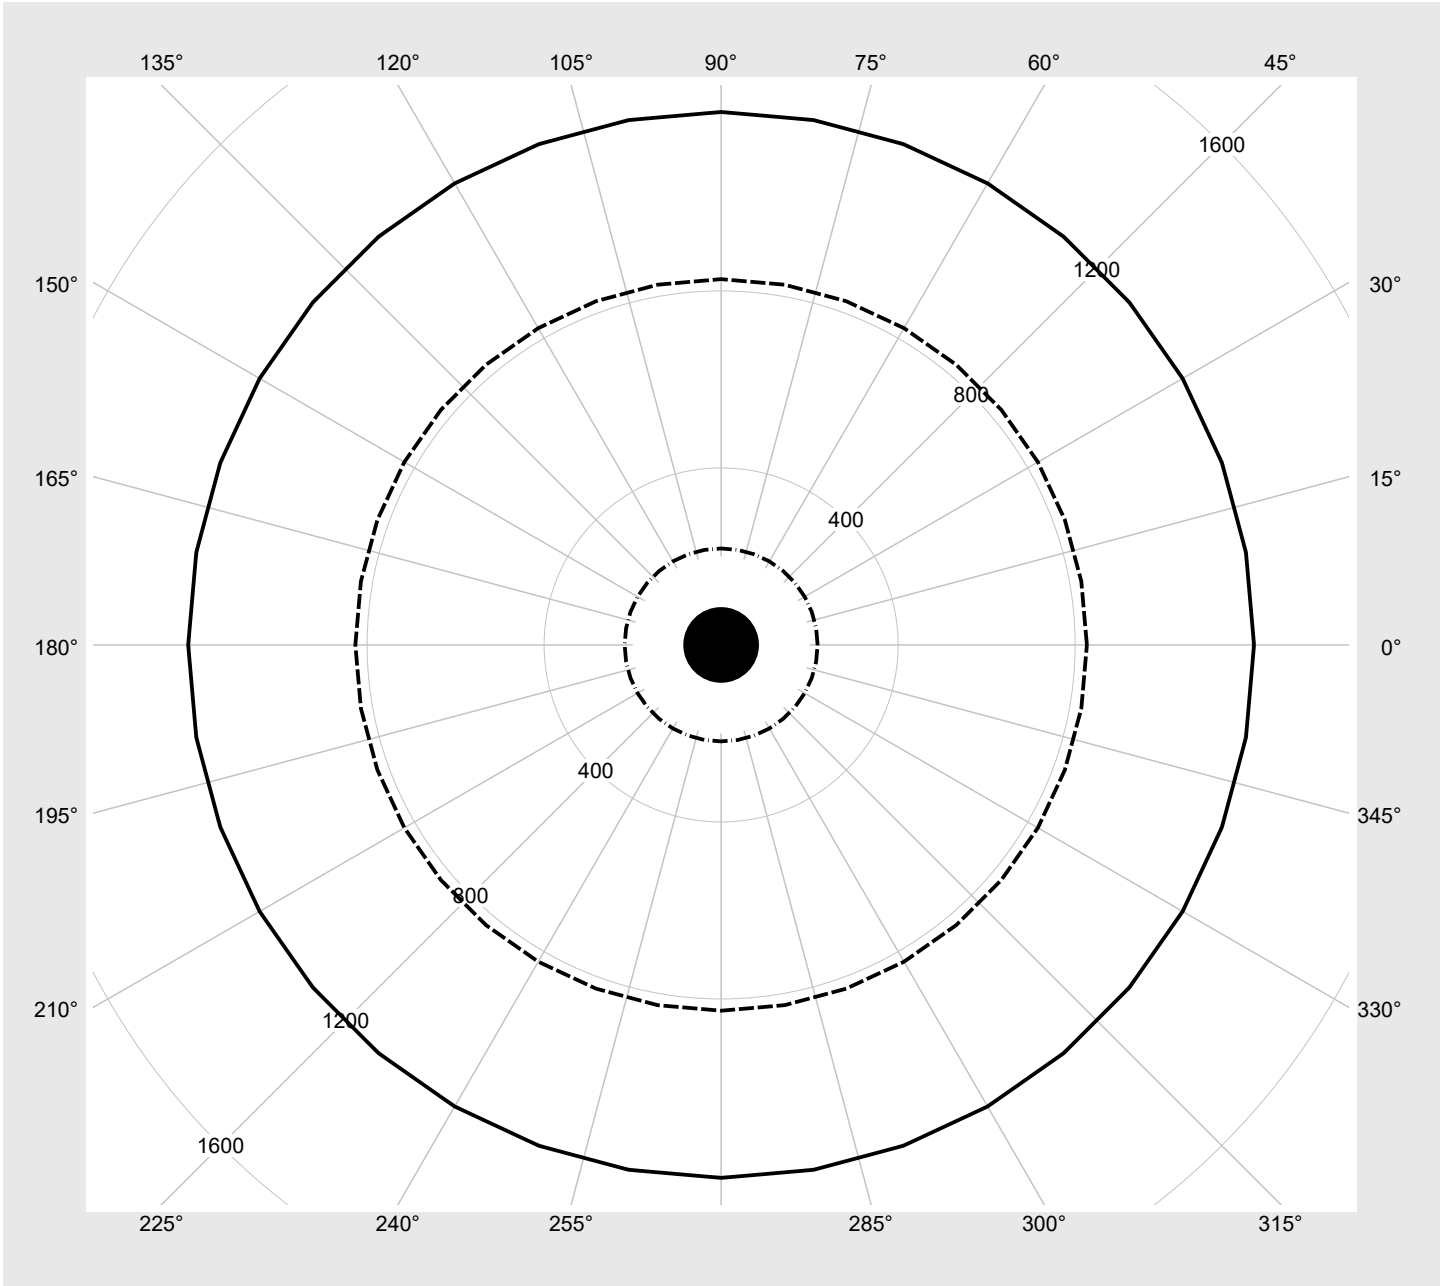

Photometric test report

Family Spot 21 Performance	Order number: 51SD34MB11B3B EAN: 4069025538970	LP number 59946_7
---	---	------------------------------------

Multilumen Table	environmental temperature: 25°C	
-------------------------	---------------------------------	---

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	4080	27.0
1	ON	OFF	OFF	3810	25.0
2	OFF	ON	OFF	3540	23.0
3	ON	ON	OFF	3260	21.0
4	OFF	OFF	ON	2980	19.1
5	ON	OFF	ON	2690	17.1
6	OFF	ON	ON	2400	15.2
7	ON	ON	ON	2110	13.4