

## Photometric test report

### Family Spot 21 Performance

**Order number: 51SD63MB11B3B**  
**EAN: 4069025539151**

**LP number**  
**59947\_7**



<b>Version</b>	housing, white aluminium, reflector, cover glass, transparent, medium distribution
<b>Lamps</b>	LED 3000 K   CRI ≥ 90
<b>Controlgear</b>	ECG Multilumen
<b>Setting</b>	factory setting: DIP-Step=4
<b>Rated values</b>	Net luminous flux = 3000 lm Power consumption = 19.1 W Luminous efficacy = 157.1 lm/W


**serial**  
**documentation**  
**11.05.2026**

**sITeco**

**Luminous intensity in cd/klm**

**C180-0**

**Imax: 2789 cd/klm**

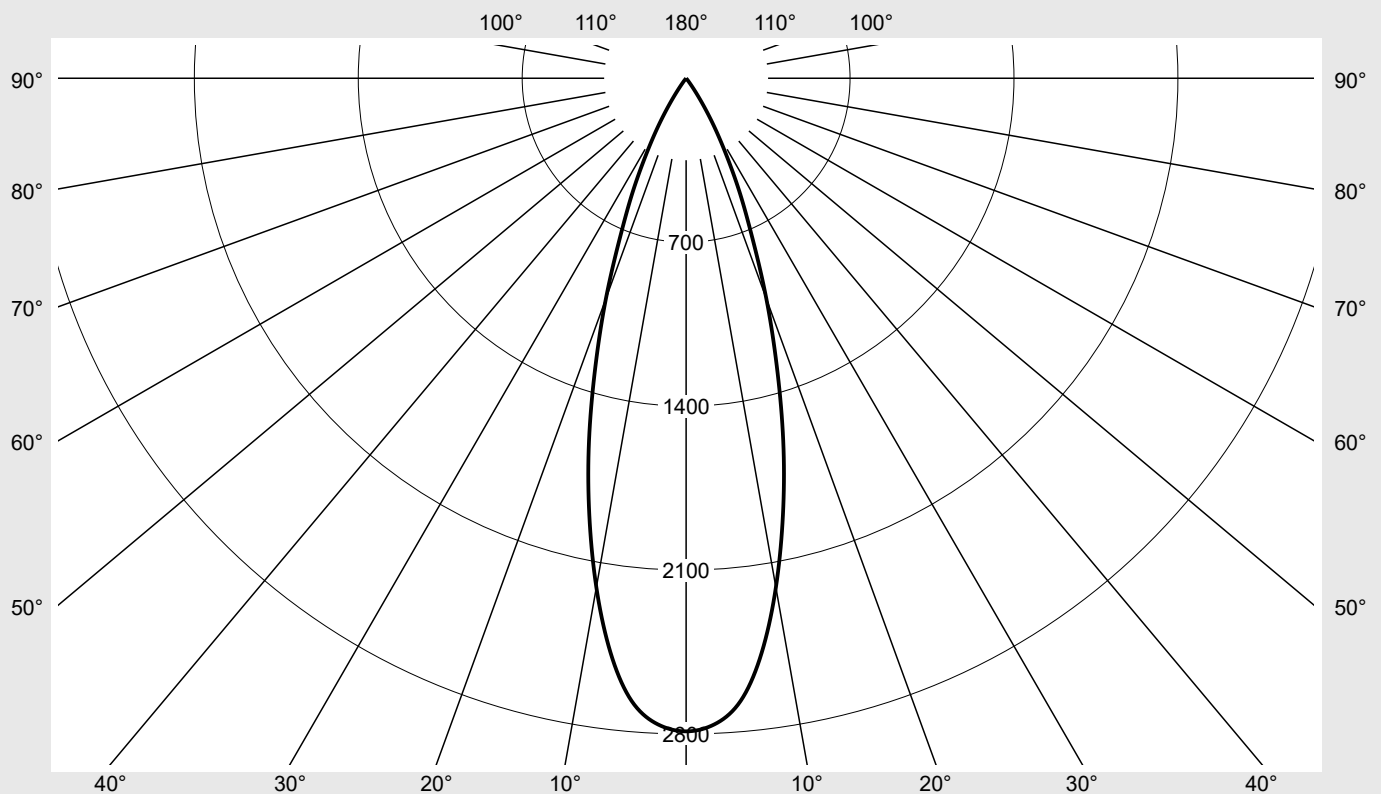

#### Classifications

DIN 5040 A 8 0  
CIE N1=98 N2=99 N3=100  
N4=100 N5=100

#### Luminaire light output ratios

$\eta_{LB}$  100.0%  
 $\phi_u$  100.0%  
 $\phi_o$  0.0%

#### Measurement conditions

DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> Spot 21 Performance	<b>Order number: 51SD63MB11B3B</b> <b>EAN: 4069025539151</b>	<b>LP number</b> 59947_7
--------------------------------------	---	-----------------------------



<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2788.8	4.2	4.2
2,5°	2761.7	33.0	37.2
5,0°	2669.2	63.8	101.0
7,5°	2473.6	88.5	189.5
10,0°	2207.5	105.1	294.6
12,5°	1910.1	113.3	407.9
15,0°	1602.2	113.7	521.6
17,5°	1286.8	106.1	627.6
20,0°	1001.4	93.9	721.5
22,5°	740.7	77.7	799.2
25,0°	547.9	63.5	862.7
27,5°	378.7	47.9	910.6
30,0°	246.7	33.8	944.5
32,5°	137.4	20.2	964.7
35,0°	59.8	9.4	974.1
37,5°	19.1	3.2	977.3
40,0°	13.3	2.3	979.6
42,5°	10.8	2.0	981.6
45,0°	9.2	1.8	983.4
47,5°	8.0	1.6	985.0
50,0°	7.2	1.5	986.6
52,5°	6.6	1.4	988.0
55,0°	6.3	1.4	989.4
57,5°	6.0	1.4	990.8
60,0°	5.7	1.4	992.2
62,5°	5.3	1.3	993.5
65,0°	4.9	1.2	994.7
67,5°	4.4	1.1	995.8
70,0°	3.9	1.0	996.8
72,5°	3.4	0.9	997.7
75,0°	2.7	0.7	998.4
77,5°	2.1	0.6	999.0
80,0°	1.6	0.4	999.4
82,5°	1.1	0.3	999.7
85,0°	0.7	0.2	999.9
87,5°	0.3	0.1	1000.0
90,0°	0.0	0.0	1000.0

## Photometric test report

Family <b>Spot 21 Performance</b>	Order number: <b>51SD63MB11B3B</b> EAN: <b>4069025539151</b>	LP number <b>59947_7</b>
--------------------------------------	---	-----------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	13.5	14.5	13.9	14.8	15.1	13.5	14.5	13.9	14.8	15.1
	3H	13.9	14.8	14.3	15.1	15.5	13.9	14.8	14.3	15.1	15.5
	4H	14.1	14.9	14.5	15.2	15.6	14.1	14.9	14.5	15.2	15.6
	6H	14.3	14.9	14.7	15.3	15.7	14.3	14.9	14.7	15.3	15.7
	8H	14.5	15.0	14.9	15.3	15.8	14.5	15.0	14.9	15.3	15.8
	12H	14.5	14.9	14.9	15.3	15.7	14.5	14.9	14.9	15.3	15.7
4H	2H	13.5	14.3	13.9	14.6	15.0	13.5	14.3	13.9	14.6	15.0
	3H	14.1	14.7	14.5	15.1	15.5	14.1	14.7	14.5	15.1	15.5
	4H	14.3	14.9	14.8	15.3	15.8	14.3	14.9	14.8	15.3	15.8
	6H	14.6	15.1	15.1	15.5	16.0	14.6	15.1	15.1	15.5	16.0
	8H	14.7	15.1	15.2	15.5	16.0	14.7	15.1	15.2	15.5	16.0
	12H	14.8	15.1	15.3	15.5	16.0	14.8	15.1	15.3	15.5	16.0
8H	4H	14.4	14.8	14.9	15.3	15.8	14.4	14.8	14.9	15.3	15.8
	6H	14.7	15.1	15.3	15.5	16.1	14.7	15.1	15.3	15.5	16.1
	8H	14.8	15.1	15.4	15.6	16.2	14.8	15.1	15.4	15.6	16.2
	12H	14.9	15.2	15.5	15.7	16.2	14.9	15.2	15.5	15.7	16.2
12H	4H	14.4	14.7	14.9	15.2	15.7	14.4	14.7	14.9	15.2	15.7
	6H	14.7	15.0	15.3	15.5	16.0	14.7	15.0	15.3	15.5	16.0
	8H	14.9	15.1	15.4	15.6	16.2	14.9	15.1	15.4	15.6	16.2


<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm: D = 82</b>
------------------------	---	---

<b>C-planes</b>	<b>0°</b>
$\gamma$	<b>Luminance in cd/m<sup>2</sup></b>
45,0°	7420.0
50,0°	6387.8
55,0°	6264.3
60,0°	6501.0
65,0°	6612.0
70,0°	6502.6
75,0°	5950.3
80,0°	5253.9
85,0°	4582.1

**Photometric test report**

<b>Family</b> Spot 21 Performance	<b>Order number: 51SD63MB11B3B</b> <b>EAN: 4069025539151</b>	<b>LP number</b> 59947_7
--------------------------------------	---	-----------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

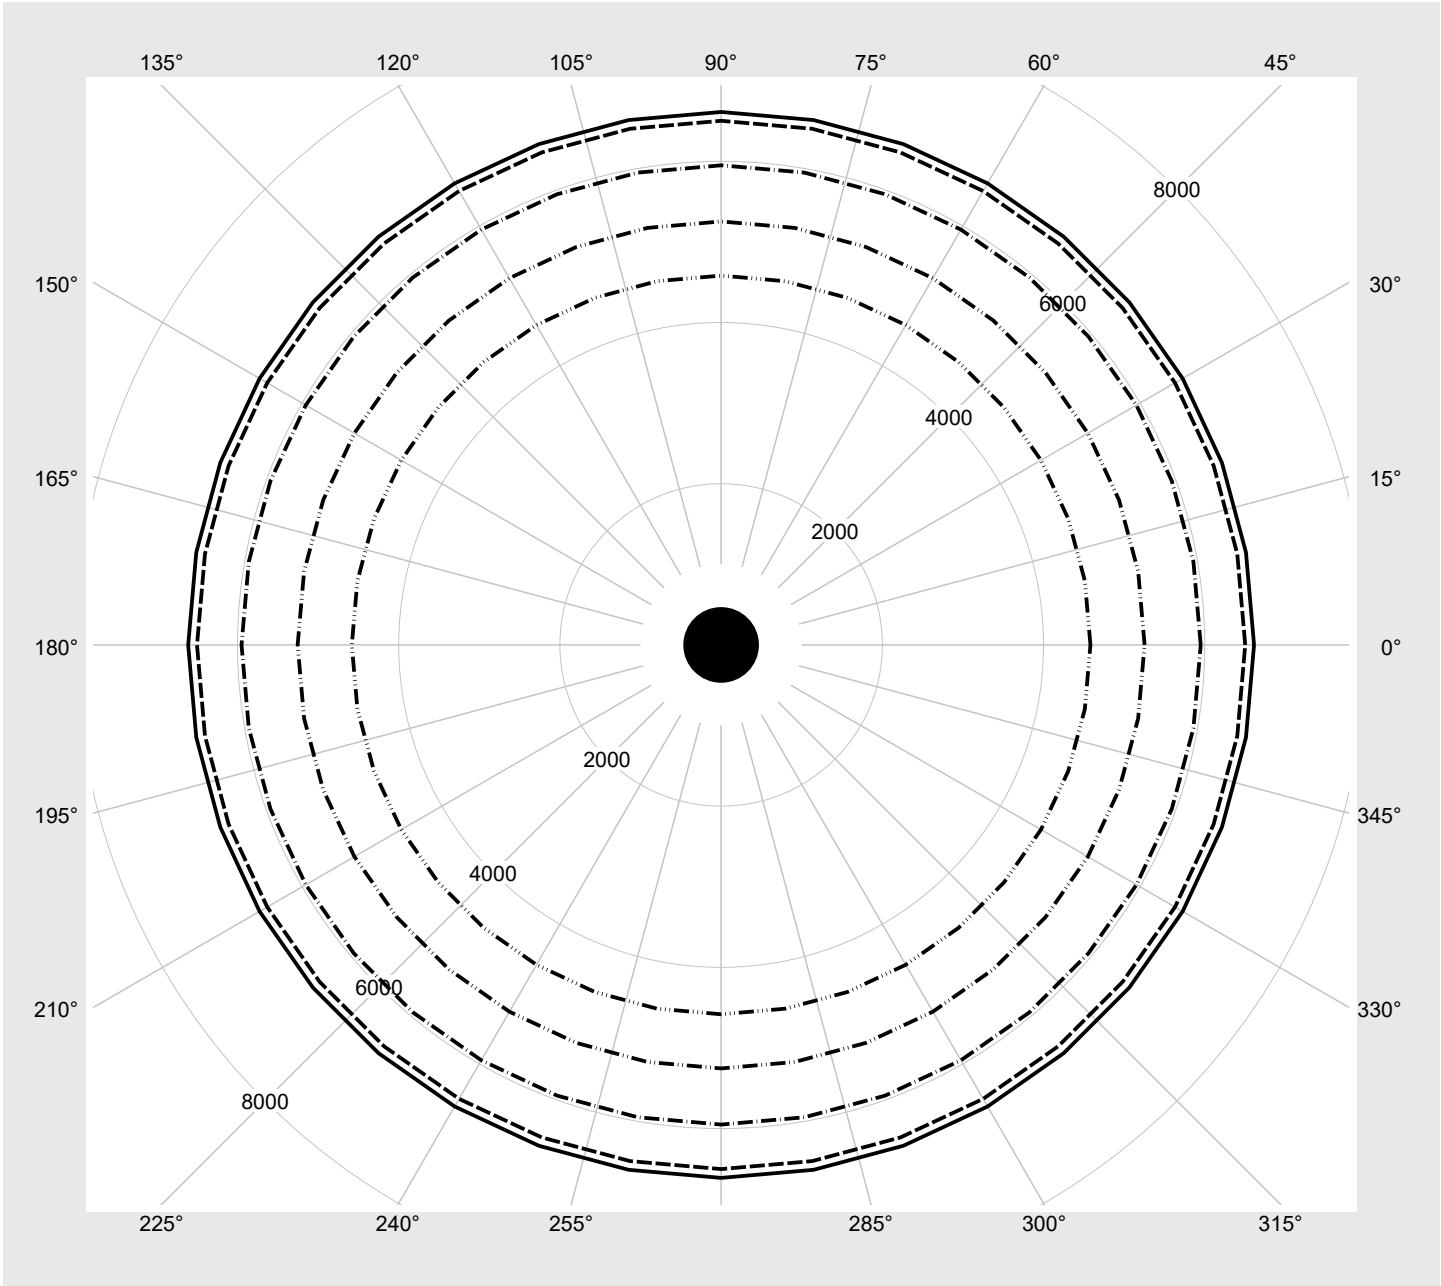

### Photometric test report

<b>Family</b> Spot 21 Performance	<b>Order number: 51SD63MB11B3B</b> <b>EAN: 4069025539151</b>	<b>LP number</b> 59947_7
--------------------------------------	---	-----------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	<b>sITeco</b>
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	4110	27.0
1	ON	OFF	OFF	3840	25.0
2	OFF	ON	OFF	3560	23.0
3	ON	ON	OFF	3280	21.0
4	OFF	OFF	ON	3000	19.1
5	ON	OFF	ON	2710	17.1
6	OFF	ON	ON	2420	15.2
7	ON	ON	ON	2120	13.4