




# Photometric test report

<b>Family</b> <b>Spot 21 Performance</b>	<b>Order number: 51SD64MB11D3B</b> <b>EAN: 4069025539373</b>	<b>LP number</b> <b>59948_9</b>										
	<table border="0"> <tr> <td><b>Version</b></td> <td>housing, white aluminium, reflector, cover glass, transparent, wide distribution</td> </tr> <tr> <td><b>Lamps</b></td> <td>LED 4000 K   CRI ≥ 90</td> </tr> <tr> <td><b>Controlgear</b></td> <td>ECG Multilumen</td> </tr> <tr> <td><b>Setting</b></td> <td>factory setting: DIP-Step=4</td> </tr> <tr> <td><b>Rated values</b></td> <td>                     Net luminous flux = 3050 lm                      Power consumption = 19.1 W                      Luminous efficacy = 159.7 lm/W                 </td> </tr> </table>	<b>Version</b>	housing, white aluminium, reflector, cover glass, transparent, wide distribution	<b>Lamps</b>	LED 4000 K   CRI ≥ 90	<b>Controlgear</b>	ECG Multilumen	<b>Setting</b>	factory setting: DIP-Step=4	<b>Rated values</b>	Net luminous flux = 3050 lm Power consumption = 19.1 W Luminous efficacy = 159.7 lm/W	<b>serial documentation</b> <b>11.05.2026</b>  
<b>Version</b>	housing, white aluminium, reflector, cover glass, transparent, wide distribution											
<b>Lamps</b>	LED 4000 K   CRI ≥ 90											
<b>Controlgear</b>	ECG Multilumen											
<b>Setting</b>	factory setting: DIP-Step=4											
<b>Rated values</b>	Net luminous flux = 3050 lm Power consumption = 19.1 W Luminous efficacy = 159.7 lm/W											

**Luminous intensity in cd/klm** C180-0 **Imax: 1859 cd/klm**

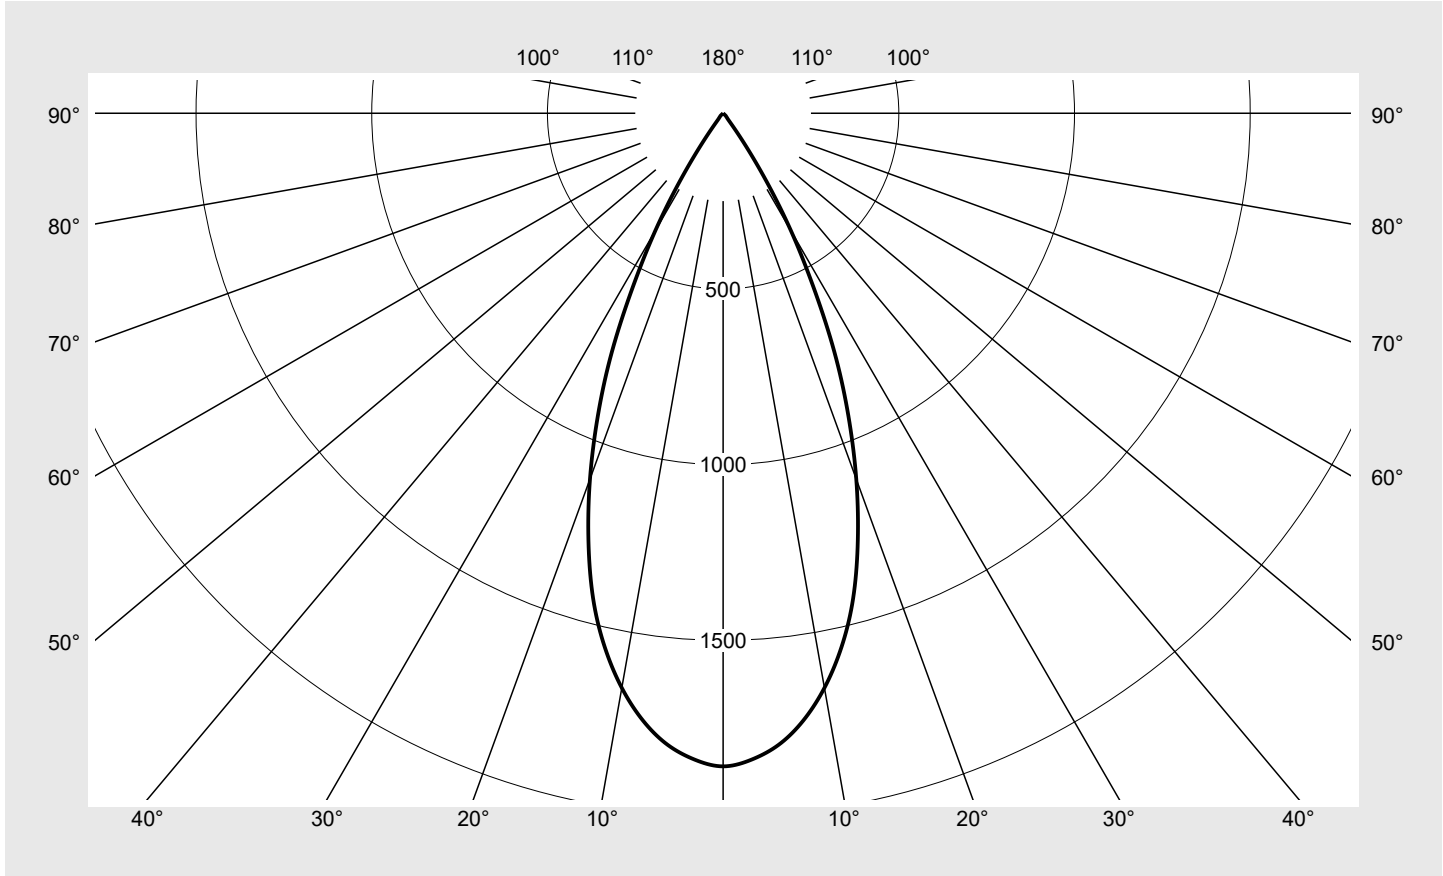

Classifications	
DIN 5040	A 8 0
CIE	N1=98 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Spot 21 Performance</b>	<b>Order number: 51SD64MB11D3B</b> <b>EAN: 4069025539373</b>	<b>LP number</b> <b>59948_9</b>
---	---	------------------------------------



<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	1858.6	2.8	2.8
2,5°	1841.5	22.0	24.8
5,0°	1804.7	43.1	67.9
7,5°	1743.8	62.4	130.3
10,0°	1660.5	79.0	209.4
12,5°	1556.2	92.3	301.7
15,0°	1429.5	101.4	403.1
17,5°	1274.7	105.1	508.2
20,0°	1107.9	103.9	612.1
22,5°	931.2	97.7	709.8
25,0°	748.7	86.7	796.5
27,5°	554.4	70.2	866.7
30,0°	386.1	52.9	919.6
32,5°	229.0	33.7	953.3
35,0°	104.0	16.3	969.7
37,5°	34.4	5.7	975.4
40,0°	18.5	3.3	978.7
42,5°	13.9	2.6	981.3
45,0°	11.2	2.2	983.4
47,5°	9.3	1.9	985.3
50,0°	8.1	1.7	987.0
52,5°	7.3	1.6	988.6
55,0°	6.6	1.5	990.1
57,5°	6.0	1.4	991.5
60,0°	5.5	1.3	992.8
62,5°	5.1	1.2	994.1
65,0°	4.6	1.1	995.2
67,5°	4.1	1.0	996.2
70,0°	3.6	0.9	997.2
72,5°	3.1	0.8	998.0
75,0°	2.4	0.6	998.6
77,5°	1.9	0.5	999.1
80,0°	1.4	0.4	999.5
82,5°	1.0	0.3	999.8
85,0°	0.6	0.2	999.9
87,5°	0.2	0.1	1000.0
90,0°	0.0	0.0	1000.0

## Photometric test report

Family <b>Spot 21 Performance</b>	Order number: <b>51SD64MB11D3B</b> EAN: <b>4069025539373</b>	LP number <b>59948_9</b>
--------------------------------------	---	-----------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	16.6	17.6	16.9	17.9	18.3	16.6	17.6	16.9	17.9	18.3
	3H	16.6	17.5	17.0	17.9	18.2	16.6	17.5	17.0	17.9	18.2
	4H	16.7	17.5	17.1	17.8	18.2	16.7	17.5	17.1	17.8	18.2
	6H	16.7	17.4	17.1	17.8	18.2	16.7	17.4	17.1	17.8	18.2
	8H	16.8	17.4	17.3	17.7	18.2	16.8	17.4	17.3	17.7	18.2
	12H	16.8	17.3	17.2	17.7	18.1	16.8	17.3	17.2	17.7	18.1
4H	2H	16.4	17.3	16.8	17.6	18.0	16.4	17.3	16.8	17.6	18.0
	3H	16.5	17.2	17.0	17.6	18.0	16.5	17.2	17.0	17.6	18.0
	4H	16.6	17.2	17.0	17.6	18.1	16.6	17.2	17.0	17.6	18.1
	6H	16.6	17.1	17.1	17.6	18.0	16.6	17.1	17.1	17.6	18.0
	8H	16.7	17.1	17.1	17.5	18.0	16.7	17.1	17.1	17.5	18.0
	12H	16.7	17.0	17.2	17.5	18.0	16.7	17.0	17.2	17.5	18.0
8H	4H	16.5	17.0	17.0	17.4	17.9	16.5	17.0	17.0	17.4	17.9
	6H	16.6	17.0	17.1	17.4	18.0	16.6	17.0	17.1	17.4	18.0
	8H	16.6	16.9	17.1	17.4	18.0	16.6	16.9	17.1	17.4	18.0
	12H	16.7	16.9	17.2	17.4	18.0	16.7	16.9	17.2	17.4	18.0
12H	4H	16.6	16.9	17.1	17.3	17.9	16.6	16.9	17.1	17.3	17.9
	6H	16.6	16.9	17.1	17.4	17.9	16.6	16.9	17.1	17.4	17.9
	8H	16.6	16.9	17.2	17.4	17.9	16.6	16.9	17.2	17.4	17.9

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm: D = 82</b>
------------------------	---	---


<b>C-planes</b>	<b>0°</b>
$\gamma$	<b>Luminance in cd/m<sup>2</sup></b>
45,0°	9171.5
50,0°	7296.7
55,0°	6662.7
60,0°	6369.1
65,0°	6302.7
70,0°	6094.2
75,0°	5368.9
80,0°	4669.6
85,0°	3989.2

**Photometric test report**

<b>Family</b> Spot 21 Performance	<b>Order number: 51SD64MB11D3B</b> <b>EAN: 4069025539373</b>	<b>LP number</b> 59948_9
--------------------------------------	---	-----------------------------



**Luminance values in cd/m<sup>2</sup>**      $\gamma$  65°      $\gamma$  70°      $\gamma$  75°      $\gamma$  80°      $\gamma$  85°

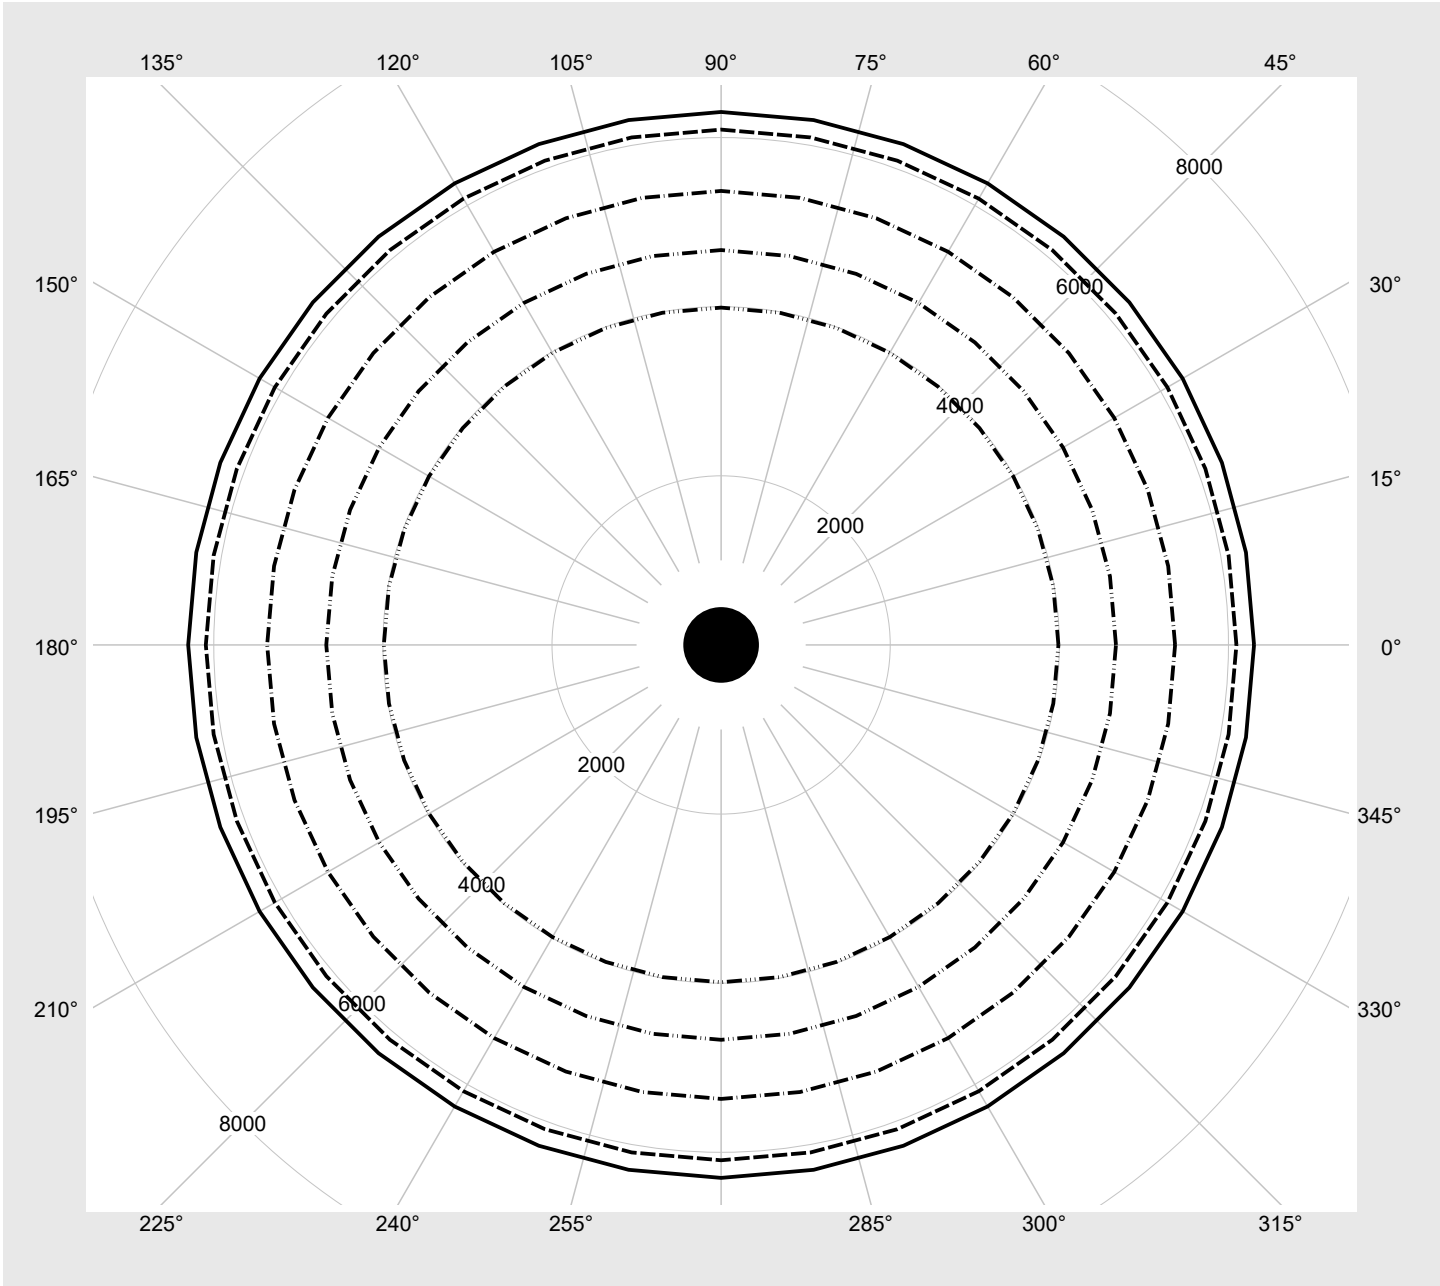

### Photometric test report

<b>Family</b> Spot 21 Performance	<b>Order number: 51SD64MB11D3B</b> <b>EAN: 4069025539373</b>	<b>LP number</b> <b>59948_9</b>
--------------------------------------	---	------------------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	<b>sITeco</b>
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	4190	27.0
1	ON	OFF	OFF	3910	25.0
2	OFF	ON	OFF	3630	23.0
3	ON	ON	OFF	3340	21.0
4	OFF	OFF	ON	3050	19.1
5	ON	OFF	ON	2760	17.1
6	OFF	ON	ON	2470	15.2
7	ON	ON	ON	2160	13.4