




Photometric test report

Family Spot 21 Standard	Order number: 51SE12MA2CC2C EAN: 4069025446862	LP number 59930_11
	Version housing, white, reflector, lens PMMA, medium distribution Lamps LED 3500 K CRI ≥ 90 Controlgear ECG Multilumen Setting factory setting: DIP-Step=6	serial documentation 11.05.2026
	Rated values Net luminous flux = 2190 lm Power consumption = 14.8 W Luminous efficacy = 148 lm/W	

Luminous intensity in cd/klm C180-0 **Imax: 2926 cd/klm**

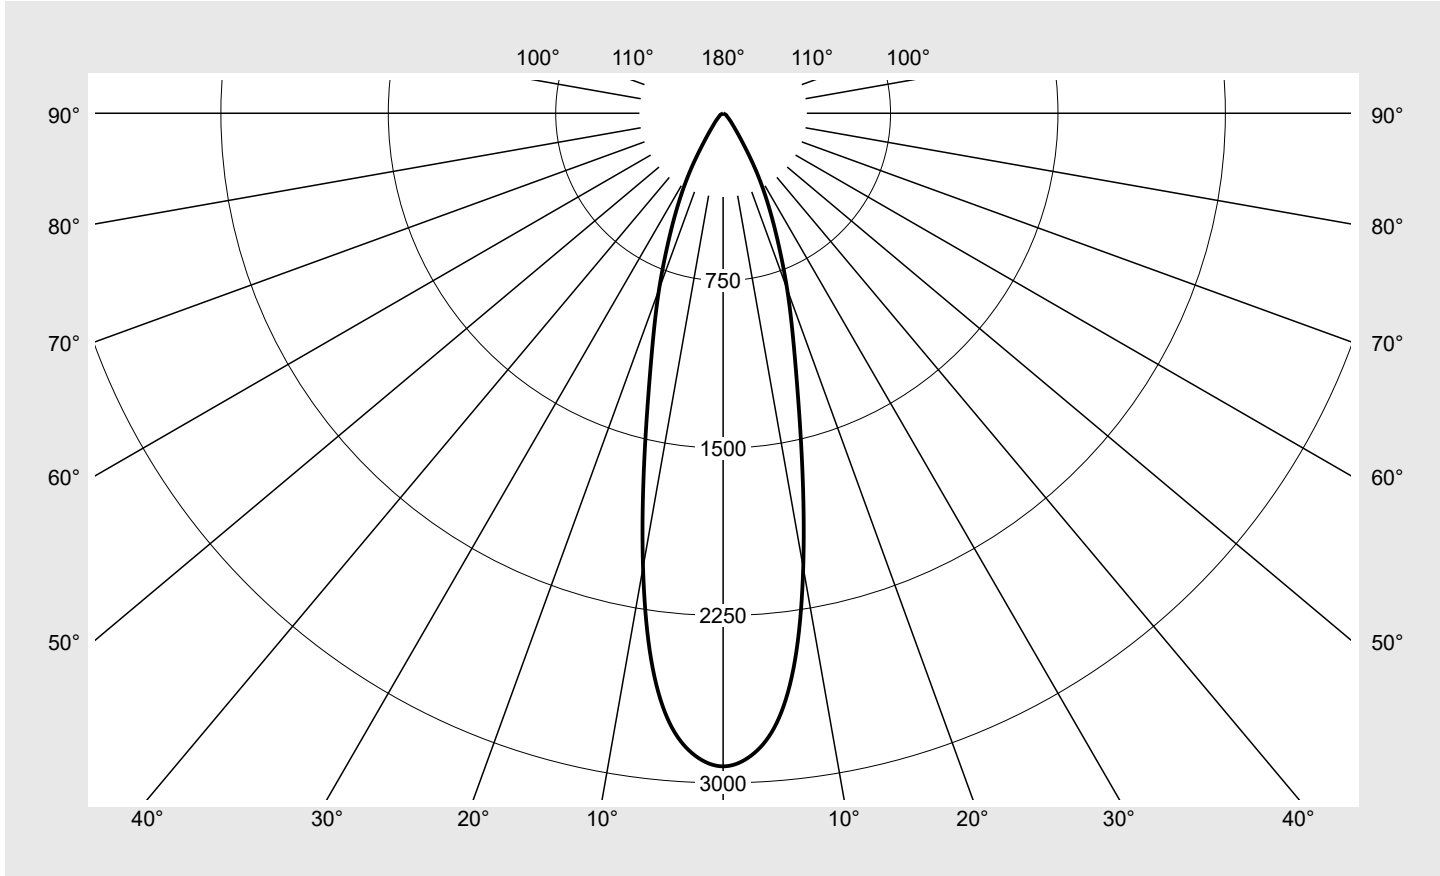

Classifications	
DIN 5040	A 8 0
CIE	N1=94 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Standard	Order number: 51SE12MA2CC2C EAN: 4069025446862	LP number 59930_11
-----------------------------------	---	------------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2925.8	4.4	4.4
2,5°	2880.2	34.4	38.8
5,0°	2743.4	65.5	104.4
7,5°	2469.4	88.4	192.7
10,0°	2066.4	98.4	291.1
12,5°	1641.6	97.4	388.5
15,0°	1288.9	91.5	479.9
17,5°	1036.1	85.4	565.3
20,0°	838.8	78.6	644.0
22,5°	662.8	69.5	713.5
25,0°	519.2	60.2	773.7
27,5°	397.3	50.3	824.0
30,0°	287.9	39.5	863.4
32,5°	189.6	27.9	891.4
35,0°	126.2	19.8	911.2
37,5°	88.2	14.7	925.9
40,0°	65.4	11.5	937.4
42,5°	51.6	9.6	947.0
45,0°	39.6	7.7	954.7
47,5°	31.5	6.4	961.0
50,0°	25.2	5.3	966.3
52,5°	21.1	4.6	970.9
55,0°	19.1	4.3	975.2
57,5°	17.3	4.0	979.2
60,0°	15.4	3.6	982.8
62,5°	13.7	3.3	986.2
65,0°	11.8	2.9	989.1
67,5°	9.9	2.5	991.6
70,0°	8.2	2.1	993.7
72,5°	6.8	1.8	995.5
75,0°	5.5	1.5	997.0
77,5°	4.3	1.2	998.1
80,0°	3.2	0.9	999.0
82,5°	2.1	0.6	999.6
85,0°	1.2	0.3	999.9
87,5°	0.3	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE12MA2CC2C EAN: 4069025446862	LP number 59930_11
----------------------------	---	-----------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	19.3	20.3	19.6	20.6	21.0	19.3	20.3	19.6	20.6	21.0
	3H	19.7	20.7	20.1	21.0	21.4	19.7	20.7	20.1	21.0	21.4
	4H	20.0	20.8	20.4	21.2	21.5	20.0	20.8	20.4	21.2	21.5
	6H	20.1	20.9	20.6	21.2	21.6	20.1	20.9	20.6	21.2	21.6
	8H	20.3	20.8	20.7	21.2	21.6	20.3	20.8	20.7	21.2	21.6
	12H	20.3	20.8	20.7	21.2	21.6	20.3	20.8	20.7	21.2	21.6
4H	2H	19.4	20.2	19.8	20.6	21.0	19.4	20.2	19.8	20.6	21.0
	3H	20.0	20.7	20.5	21.1	21.5	20.0	20.7	20.5	21.1	21.5
	4H	20.3	20.9	20.7	21.3	21.8	20.3	20.9	20.7	21.3	21.8
	6H	20.5	21.0	21.0	21.5	21.9	20.5	21.0	21.0	21.5	21.9
	8H	20.6	21.0	21.1	21.5	22.0	20.6	21.0	21.1	21.5	22.0
	12H	20.7	21.0	21.2	21.5	22.0	20.7	21.0	21.2	21.5	22.0
8H	4H	20.4	20.8	20.9	21.3	21.8	20.4	20.8	20.9	21.3	21.8
	6H	20.6	21.0	21.1	21.5	22.0	20.6	21.0	21.1	21.5	22.0
	8H	20.7	21.1	21.2	21.5	22.1	20.7	21.1	21.2	21.5	22.1
	12H	20.8	21.1	21.4	21.6	22.1	20.8	21.1	21.4	21.6	22.1
12H	4H	20.4	20.7	20.9	21.2	21.7	20.4	20.7	20.9	21.2	21.7
	6H	20.7	20.9	21.2	21.4	22.0	20.7	20.9	21.2	21.4	22.0
	8H	20.8	21.0	21.3	21.5	22.1	20.8	21.0	21.3	21.5	22.1


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 62
------------------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45,0°	40585.9
50,0°	28442.8
55,0°	24127.5
60,0°	22288.3
65,0°	20337.8
70,0°	17463.4
75,0°	15479.2
80,0°	13421.8
85,0°	10029.1

Photometric test report

Family Spot 21 Standard	Order number: 51SE12MA2CC2C EAN: 4069025446862	LP number 59930_11
-----------------------------------	---	------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

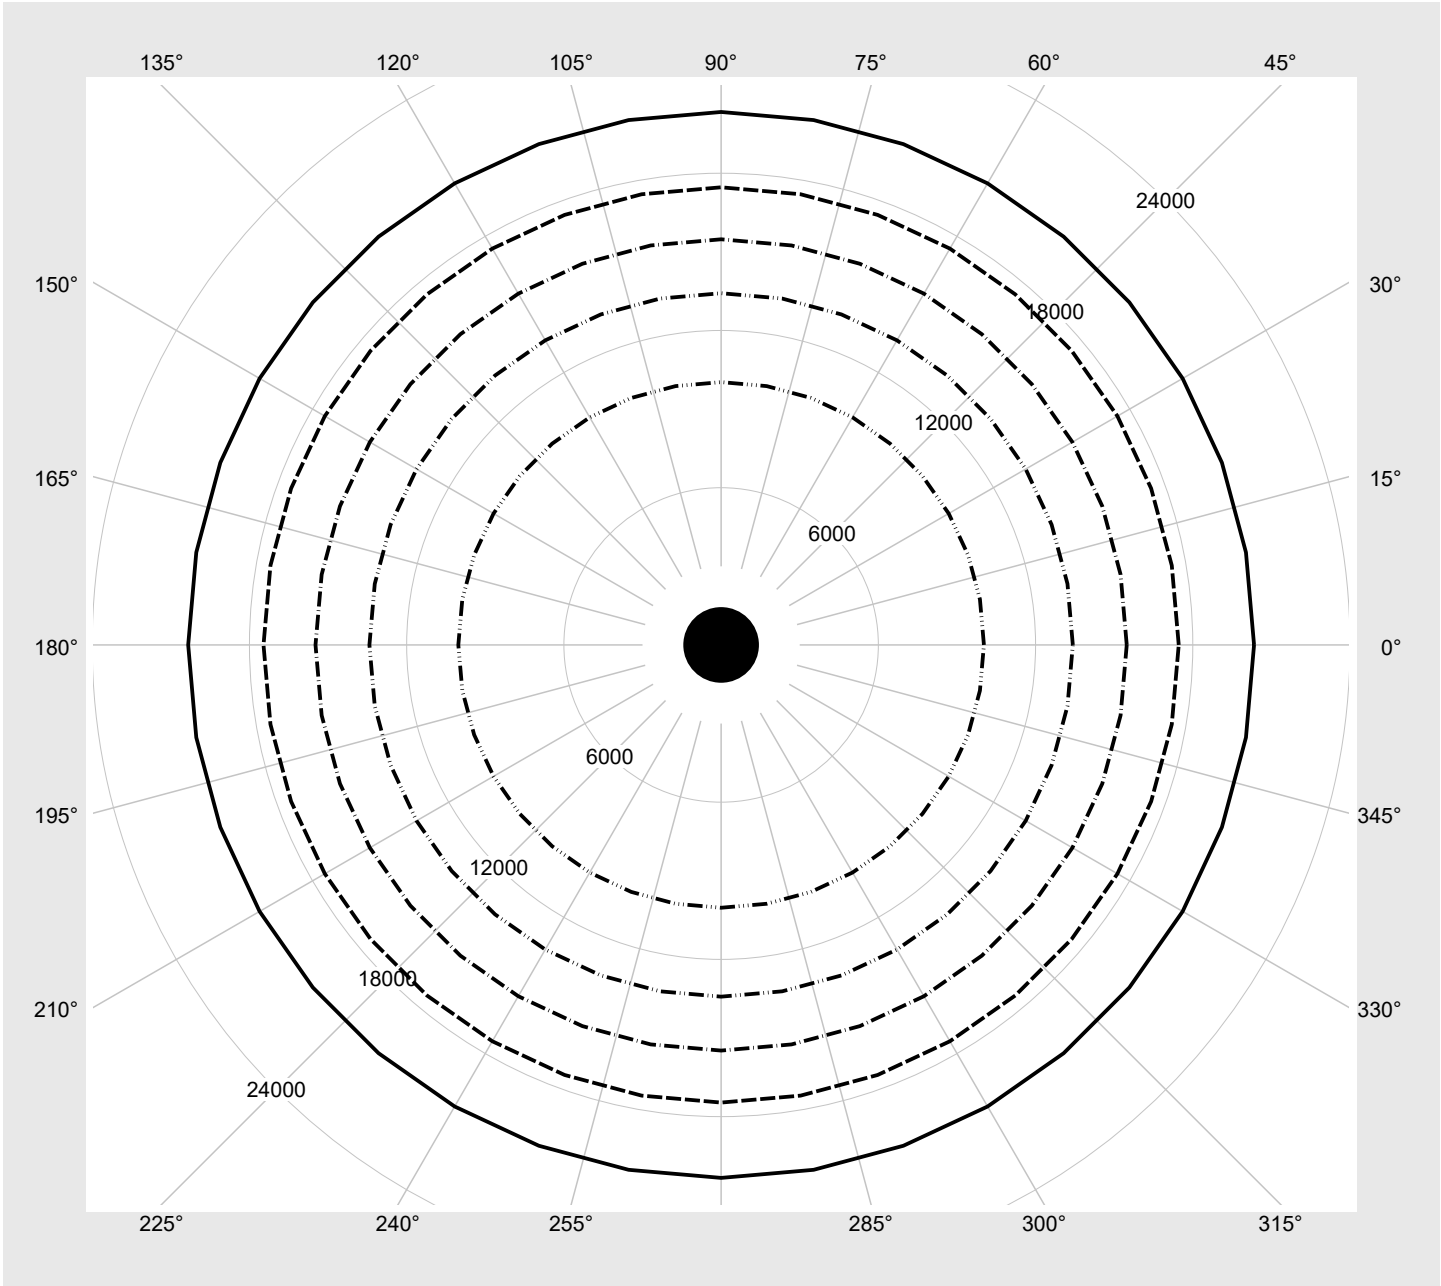

Photometric test report

Family Spot 21 Standard	Order number: 51SE12MA2CC2C EAN: 4069025446862	LP number 59930_11
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	3610	26.5
1	ON	OFF	OFF	3390	24.4
2	OFF	ON	OFF	3160	22.4
3	ON	ON	OFF	2920	20.4
4	OFF	OFF	ON	2680	18.5
5	ON	OFF	ON	2440	16.5
6	OFF	ON	ON	2190	14.8
7	ON	ON	ON	1930	12.8