




Photometric test report

Family Spot 21 Standard	Order number: 51SE13MB11C2C EAN: 4069025447067	LP number 59929_29
	Version housing, white, reflector, cover glass, transparent, medium distribution Lamps LED 3500 K CRI ≥ 90 Controlgear ECG Multilumen	serial documentation 11.05.2026
	Setting factory setting: DIP-Step=4 Rated values Net luminous flux = 3000 lm Power consumption = 18.5 W Luminous efficacy = 162.2 lm/W	

Luminous intensity in cd/klm C180-0 **Imax: 2290 cd/klm**

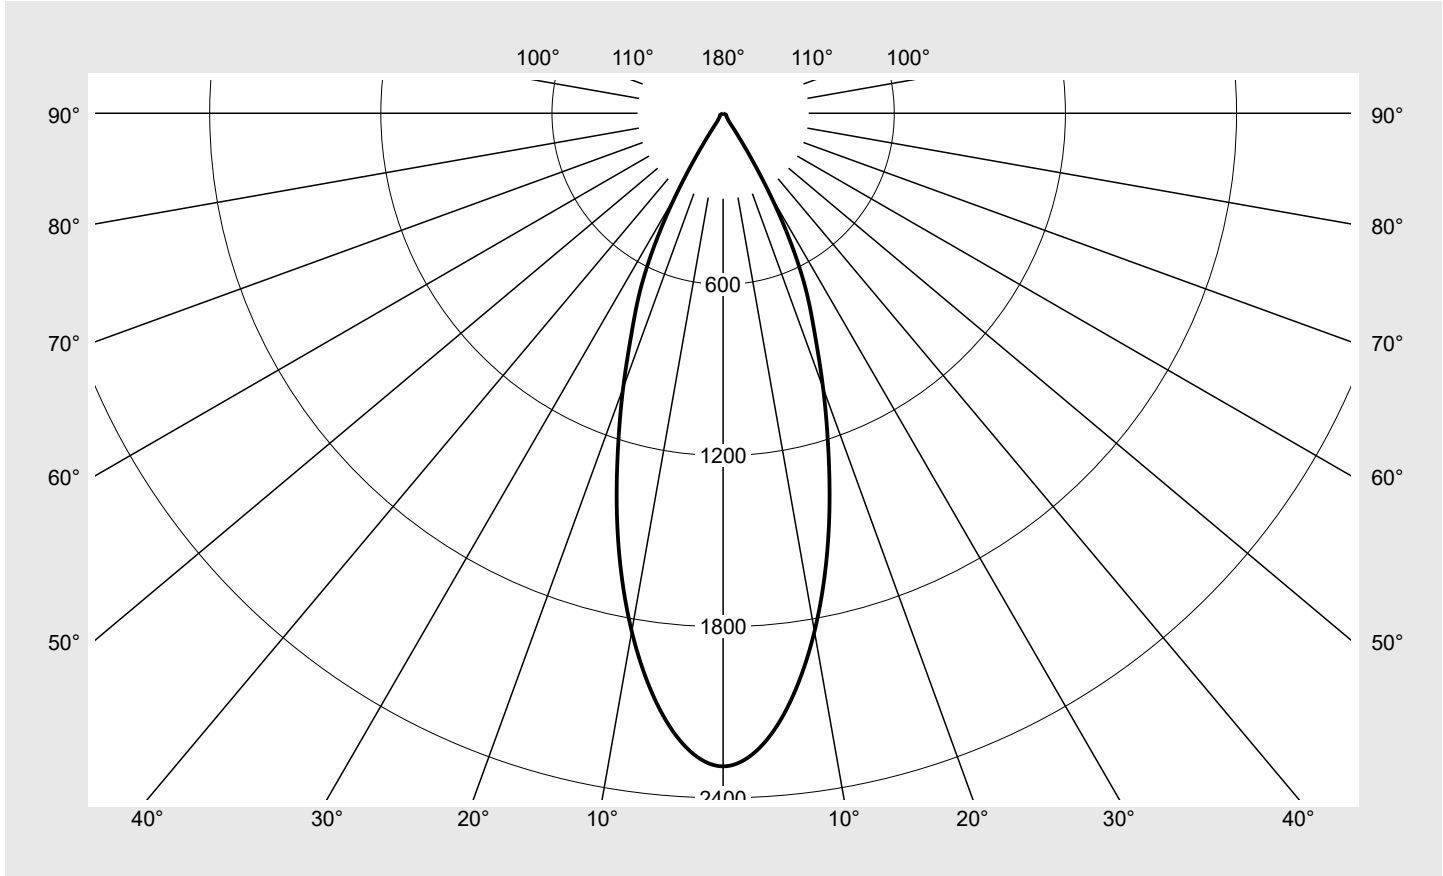

Classifications	
DIN 5040	A 8 0
CIE	N1=96 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Standard	Order number: 51SE13MB11C2C EAN: 4069025447067	LP number 59929_29
-----------------------------------	---	------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes γ	0°	Phi-zone	Total Phi-zone
	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2289.5	3.4	3.4
2,5°	2252.9	26.9	30.4
5,0°	2156.9	51.5	81.9
7,5°	2016.0	72.1	154.0
10,0°	1844.4	87.8	241.8
12,5°	1650.3	97.9	339.8
15,0°	1440.1	102.2	441.9
17,5°	1224.6	100.9	542.9
20,0°	1024.7	96.1	639.0
22,5°	841.7	88.3	727.2
25,0°	691.4	80.1	807.3
27,5°	518.9	65.7	873.0
30,0°	329.4	45.2	918.2
32,5°	151.6	22.3	940.5
35,0°	46.4	7.3	947.8
37,5°	28.4	4.7	952.6
40,0°	23.2	4.1	956.6
42,5°	20.2	3.7	960.4
45,0°	18.0	3.5	963.9
47,5°	16.3	3.3	967.1
50,0°	15.1	3.2	970.3
52,5°	14.3	3.1	973.4
55,0°	13.6	3.1	976.5
57,5°	13.0	3.0	979.5
60,0°	12.3	2.9	982.5
62,5°	11.6	2.8	985.3
65,0°	10.9	2.7	988.0
67,5°	9.9	2.5	990.5
70,0°	8.9	2.3	992.8
72,5°	7.7	2.0	994.8
75,0°	6.2	1.6	996.5
77,5°	4.8	1.3	997.8
80,0°	3.6	1.0	998.7
82,5°	2.5	0.7	999.4
85,0°	1.5	0.4	999.8
87,5°	0.6	0.2	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE13MB11C2C EAN: 4069025447067	LP number 59929_29
----------------------------	---	-----------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	15.7	16.7	16.0	17.0	17.3	15.7	16.7	16.0	17.0	17.3
	3H	16.9	17.8	17.2	18.1	18.5	16.9	17.8	17.2	18.1	18.5
	4H	17.4	18.2	17.8	18.6	19.0	17.4	18.2	17.8	18.6	19.0
	6H	17.7	18.5	18.2	18.9	19.3	17.7	18.5	18.2	18.9	19.3
	8H	18.0	18.6	18.4	19.0	19.4	18.0	18.6	18.4	19.0	19.4
	12H	18.1	18.6	18.5	19.0	19.4	18.1	18.6	18.5	19.0	19.4
4H	2H	16.0	16.9	16.4	17.2	17.6	16.0	16.9	16.4	17.2	17.6
	3H	17.5	18.2	17.9	18.5	19.0	17.5	18.2	17.9	18.5	19.0
	4H	18.1	18.7	18.6	19.1	19.6	18.1	18.7	18.6	19.1	19.6
	6H	18.6	19.1	19.0	19.5	20.0	18.6	19.1	19.0	19.5	20.0
	8H	18.8	19.2	19.2	19.6	20.1	18.8	19.2	19.2	19.6	20.1
	12H	18.9	19.2	19.4	19.7	20.2	18.9	19.2	19.4	19.7	20.2
8H	4H	18.4	18.8	18.8	19.2	19.7	18.4	18.8	18.8	19.2	19.7
	6H	18.9	19.3	19.4	19.8	20.3	18.9	19.3	19.4	19.8	20.3
	8H	19.1	19.4	19.6	19.9	20.5	19.1	19.4	19.6	19.9	20.5
	12H	19.3	19.5	19.8	20.0	20.6	19.3	19.5	19.8	20.0	20.6
12H	4H	18.4	18.7	18.9	19.2	19.7	18.4	18.7	18.9	19.2	19.7
	6H	19.0	19.2	19.5	19.7	20.3	19.0	19.2	19.5	19.7	20.3
	8H	19.2	19.4	19.7	19.9	20.5	19.2	19.4	19.7	19.9	20.5

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
-----------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45,0°	14426.2
50,0°	13387.3
55,0°	13512.1
60,0°	14018.9
65,0°	14698.5
70,0°	14828.8
75,0°	13652.0
80,0°	11813.0
85,0°	9809.4


Photometric test report

Family Spot 21 Standard	Order number: 51SE13MB11C2C EAN: 4069025447067	LP number 59929_29
-----------------------------------	---	------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

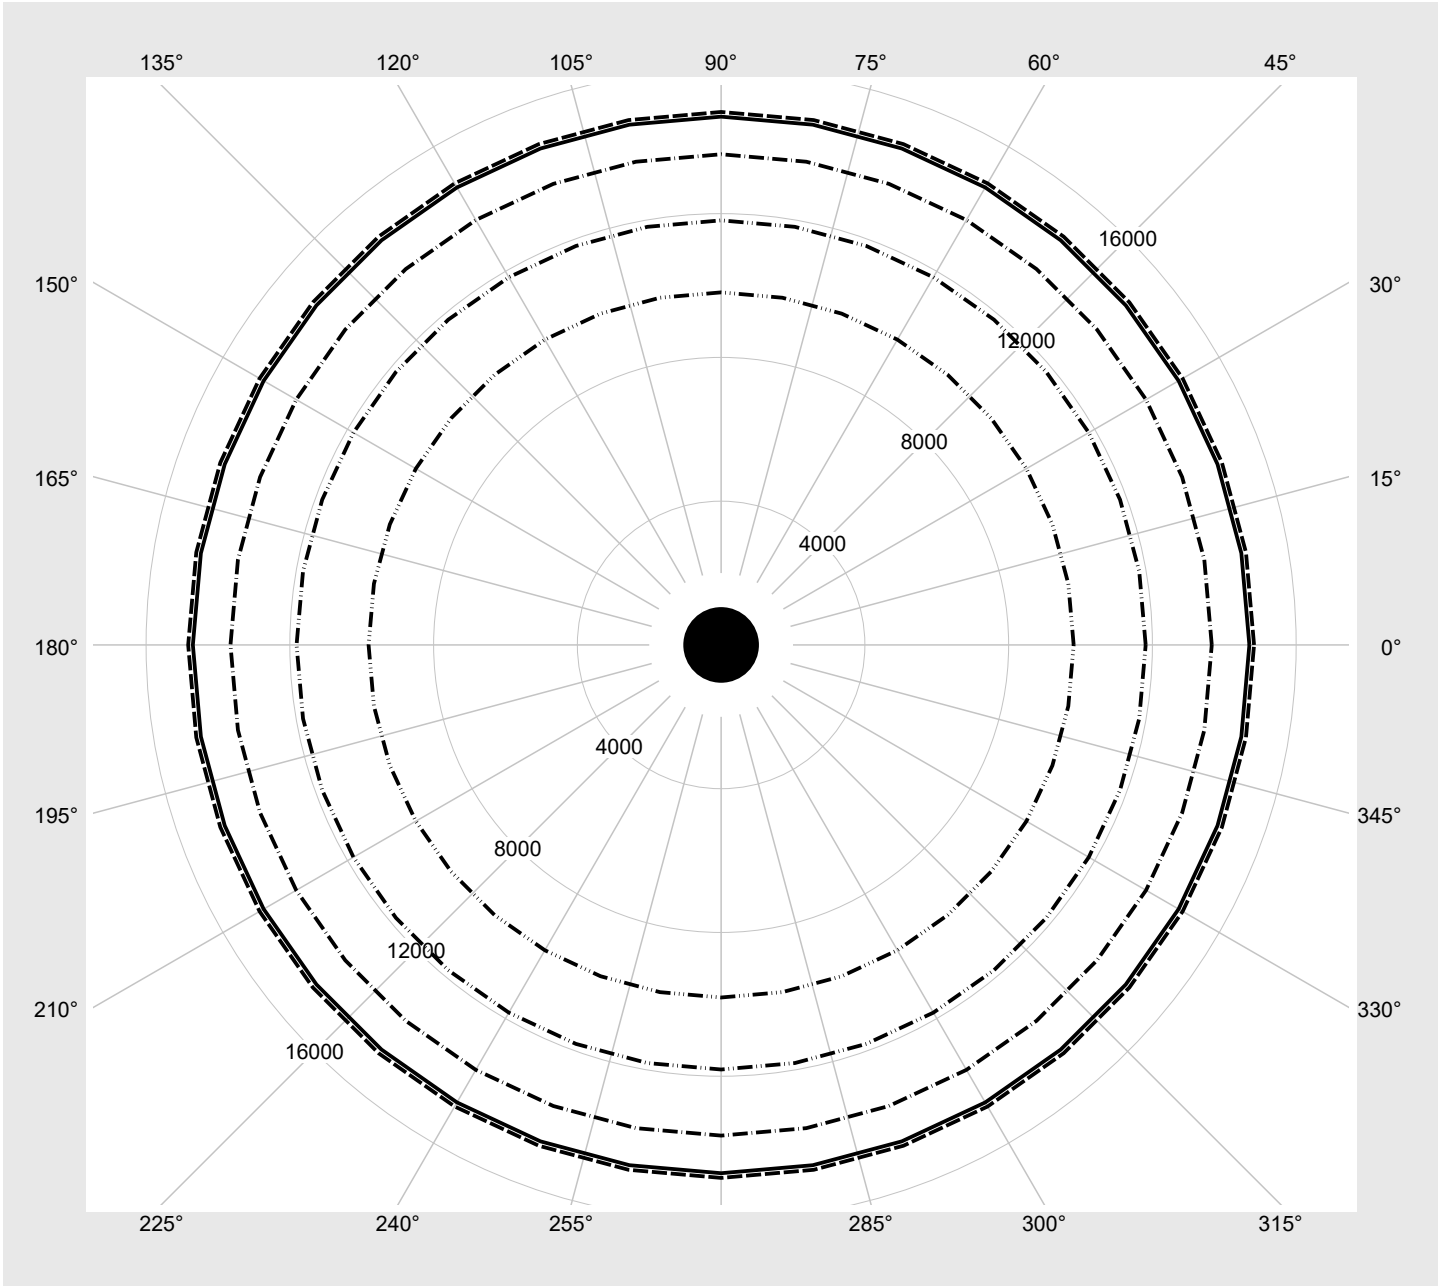

Photometric test report

Family Spot 21 Standard	Order number: 51SE13MB11C2C EAN: 4069025447067	LP number 59929_29
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	4050	26.5
1	ON	OFF	OFF	3800	24.5
2	OFF	ON	OFF	3540	22.5
3	ON	ON	OFF	3270	20.5
4	OFF	OFF	ON	3000	18.5
5	ON	OFF	ON	2730	16.6
6	OFF	ON	ON	2450	14.8
7	ON	ON	ON	2160	12.9