




Photometric test report

Family Spot 21 Standard	Order number: 51SE14MB11C2C EAN: 4069025447159	LP number 59931_29										
	<table border="0"> <tr> <td>Version</td> <td>housing, white, reflector, cover glass, transparent, wide distribution</td> </tr> <tr> <td>Lamps</td> <td>LED 3500 K CRI ≥ 90</td> </tr> <tr> <td>Controlgear</td> <td>ECG Multilumen</td> </tr> <tr> <td>Setting</td> <td>factory setting: DIP-Step=4</td> </tr> <tr> <td>Rated values</td> <td> Net luminous flux = 2940 lm Power consumption = 18.5 W Luminous efficacy = 158.9 lm/W </td> </tr> </table>	Version	housing, white, reflector, cover glass, transparent, wide distribution	Lamps	LED 3500 K CRI ≥ 90	Controlgear	ECG Multilumen	Setting	factory setting: DIP-Step=4	Rated values	Net luminous flux = 2940 lm Power consumption = 18.5 W Luminous efficacy = 158.9 lm/W	serial documentation 11.05.2026 
Version	housing, white, reflector, cover glass, transparent, wide distribution											
Lamps	LED 3500 K CRI ≥ 90											
Controlgear	ECG Multilumen											
Setting	factory setting: DIP-Step=4											
Rated values	Net luminous flux = 2940 lm Power consumption = 18.5 W Luminous efficacy = 158.9 lm/W											

Luminous intensity in cd/klm C180-0 **Imax: 1454 cd/klm**

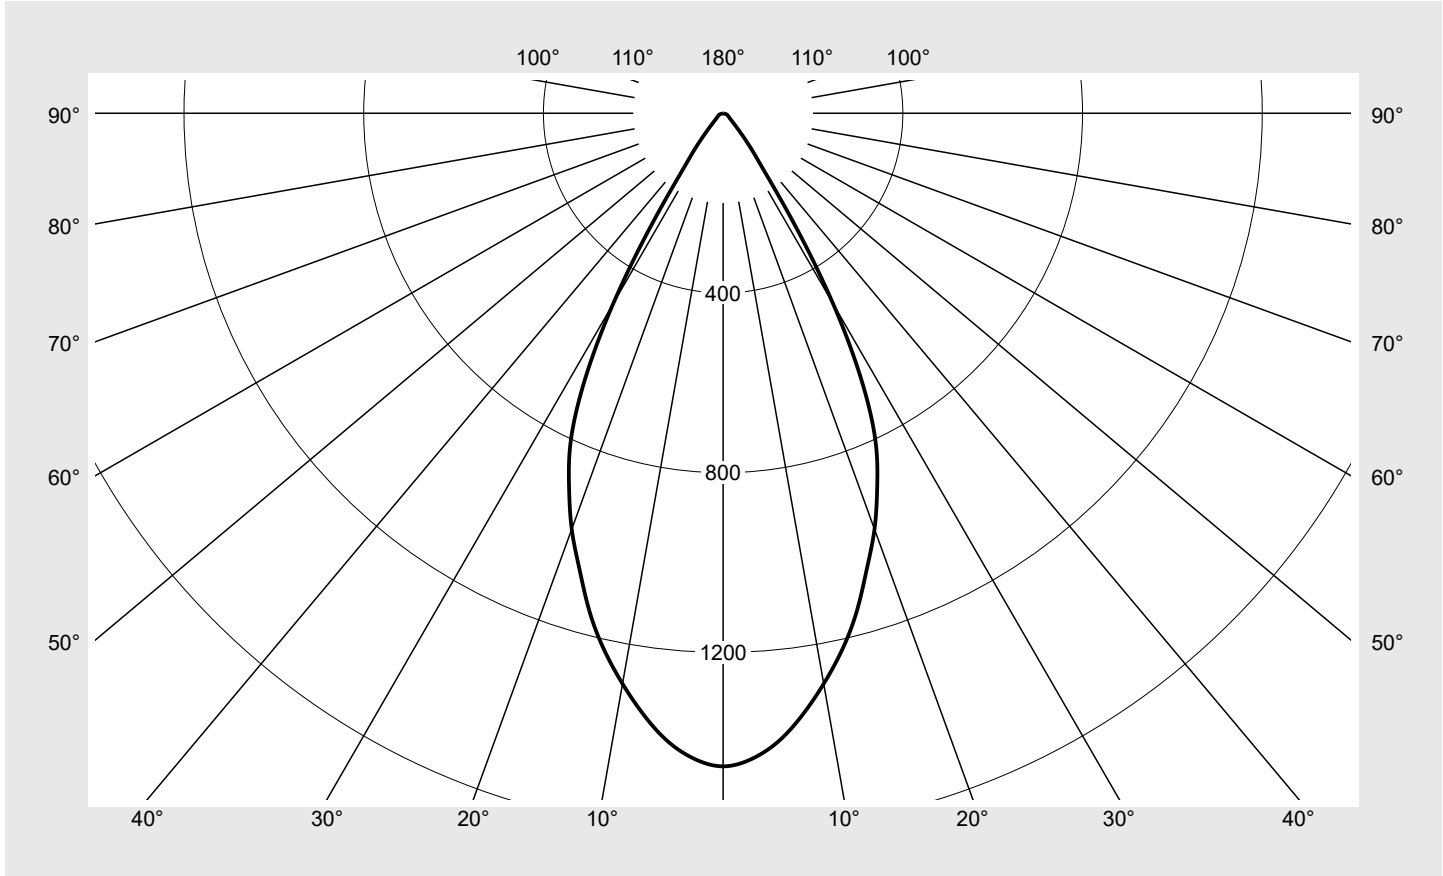

Classifications	
DIN 5040	A 7 0
CIE	N1=94 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Standard	Order number: 51SE14MB11C2C EAN: 4069025447159	LP number 59931_29
-----------------------------------	---	------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	1453.7	2.2	2.2
2,5°	1438.9	17.2	19.4
5,0°	1404.1	33.5	52.9
7,5°	1351.1	48.3	101.3
10,0°	1289.5	61.4	162.7
12,5°	1223.4	72.6	235.2
15,0°	1148.5	81.5	316.7
17,5°	1063.6	87.7	404.4
20,0°	985.2	92.4	496.8
22,5°	896.4	94.0	590.8
25,0°	801.5	92.9	683.7
27,5°	663.4	84.0	767.6
30,0°	489.2	67.1	834.7
32,5°	307.3	45.3	880.0
35,0°	173.2	27.2	907.2
37,5°	114.5	19.1	926.3
40,0°	77.4	13.6	940.0
42,5°	52.8	9.8	949.7
45,0°	37.7	7.3	957.0
47,5°	28.4	5.7	962.8
50,0°	22.7	4.8	967.6
52,5°	19.1	4.2	971.7
55,0°	16.7	3.8	975.5
57,5°	15.0	3.5	978.9
60,0°	13.6	3.2	982.2
62,5°	12.4	3.0	985.2
65,0°	11.2	2.8	988.0
67,5°	10.1	2.6	990.6
70,0°	9.0	2.3	992.9
72,5°	7.7	2.0	994.9
75,0°	6.2	1.6	996.5
77,5°	4.7	1.3	997.8
80,0°	3.6	1.0	998.8
82,5°	2.5	0.7	999.5
85,0°	1.5	0.4	999.9
87,5°	0.5	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE14MB11C2C EAN: 4069025447159	LP number 59931_29
----------------------------	---	-----------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.8	20.9	20.1	21.2	21.5	19.8	20.9	20.1	21.2	21.5
	3H	20.1	21.1	20.5	21.4	21.8	20.1	21.1	20.5	21.4	21.8
	4H	20.2	21.1	20.6	21.5	21.9	20.2	21.1	20.6	21.5	21.9
	6H	20.3	21.2	20.7	21.5	21.9	20.3	21.2	20.7	21.5	21.9
	8H	20.5	21.2	21.0	21.5	22.0	20.5	21.2	21.0	21.5	22.0
	12H	20.5	21.1	21.0	21.5	21.9	20.5	21.1	21.0	21.5	21.9
4H	2H	19.7	20.7	20.1	21.0	21.4	19.7	20.7	20.1	21.0	21.4
	3H	20.2	20.9	20.6	21.3	21.8	20.2	20.9	20.6	21.3	21.8
	4H	20.4	21.1	20.9	21.5	22.0	20.4	21.1	20.9	21.5	22.0
	6H	20.6	21.2	21.1	21.6	22.1	20.6	21.2	21.1	21.6	22.1
	8H	20.7	21.2	21.2	21.6	22.1	20.7	21.2	21.2	21.6	22.1
	12H	20.8	21.2	21.3	21.6	22.1	20.8	21.2	21.3	21.6	22.1
8H	4H	20.5	21.0	21.0	21.4	21.9	20.5	21.0	21.0	21.4	21.9
	6H	20.8	21.1	21.3	21.6	22.1	20.8	21.1	21.3	21.6	22.1
	8H	20.8	21.2	21.3	21.7	22.2	20.8	21.2	21.3	21.7	22.2
	12H	20.9	21.2	21.5	21.7	22.3	20.9	21.2	21.5	21.7	22.3
12H	4H	20.5	20.9	21.0	21.4	21.9	20.5	20.9	21.0	21.4	21.9
	6H	20.8	21.1	21.3	21.6	22.1	20.8	21.1	21.3	21.6	22.1
	8H	20.9	21.1	21.4	21.7	22.2	20.9	21.1	21.4	21.7	22.2


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
-----------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45,0°	29659.5
50,0°	19697.4
55,0°	16240.0
60,0°	15171.5
65,0°	14781.3
70,0°	14677.1
75,0°	13361.8
80,0°	11563.9
85,0°	9600.5

Photometric test report

Family Spot 21 Standard	Order number: 51SE14MB11C2C EAN: 4069025447159	LP number 59931_29
-----------------------------------	---	------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

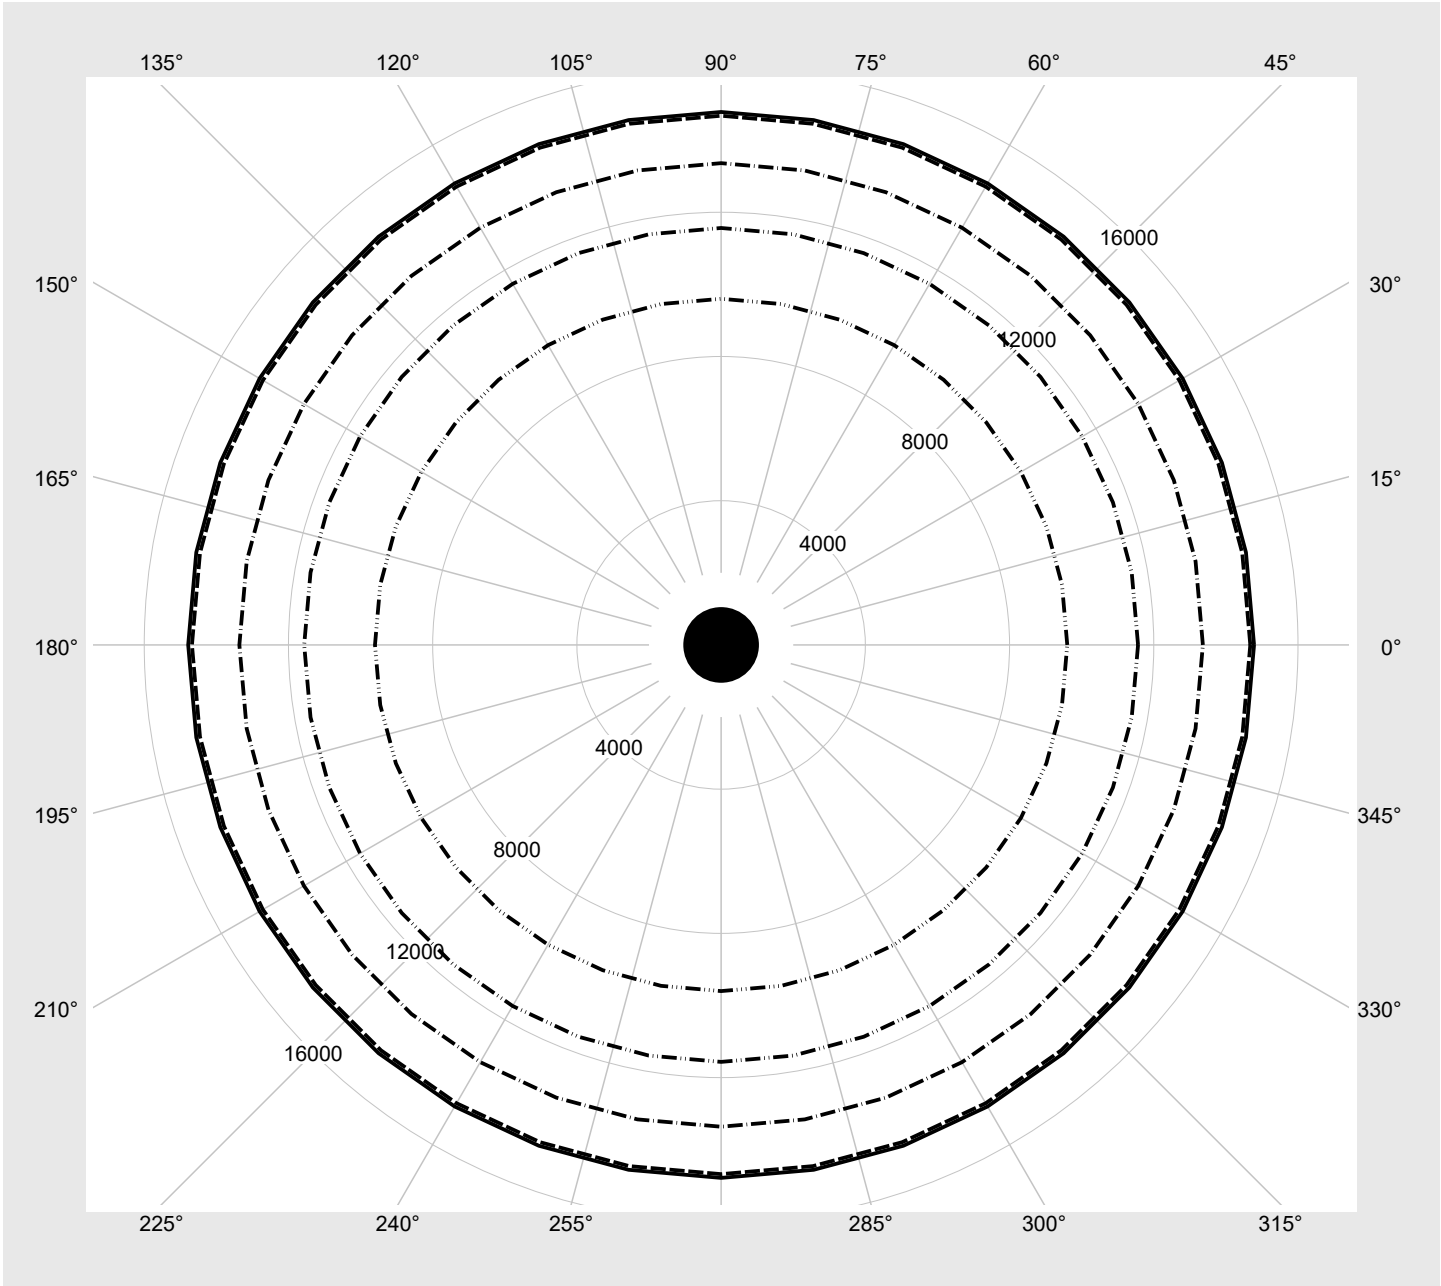

Photometric test report

Family Spot 21 Standard	Order number: 51SE14MB11C2C EAN: 4069025447159	LP number 59931_29
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	3960	26.5
1	ON	OFF	OFF	3710	24.5
2	OFF	ON	OFF	3460	22.5
3	ON	ON	OFF	3200	20.5
4	OFF	OFF	ON	2940	18.5
5	ON	OFF	ON	2670	16.6
6	OFF	ON	ON	2390	14.8
7	ON	ON	ON	2110	12.9