




Photometric test report

Family Spot 21 Standard	Order number: 51SE33DA2DC2C EAN: 4069025447432	LP number 59940_15
	Version housing, black, reflector, lens PMMA, wide distribution Lamps LED 3500 K CRI ≥ 90 Controlgear ECG-DALI-Multilumen Setting factory setting: DIP-Step=5	serial documentation 11.05.2026
	Rated values Net luminous flux = 2150 lm Power consumption = 15.6 W Luminous efficacy = 137.8 lm/W	

Luminous intensity in cd/klm C180-0 **Imax: 2638 cd/klm**

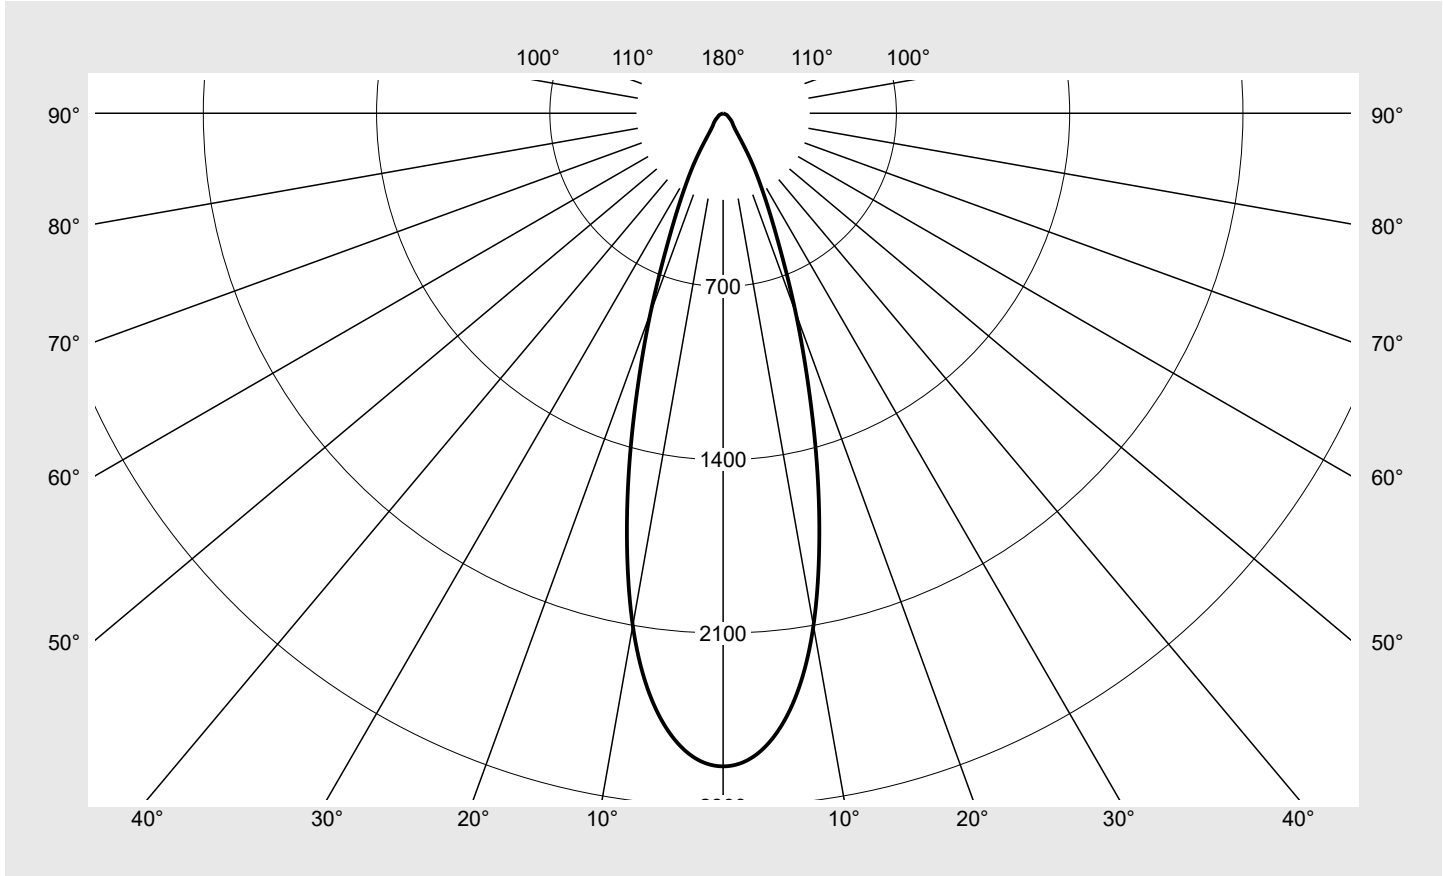

Classifications	
DIN 5040	A 8 0
CIE	N1=92 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Standard	Order number: 51SE33DA2DC2C EAN: 4069025447432	LP number 59940_15
-----------------------------------	---	------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2638.3	3.9	3.9
2,5°	2607.2	31.2	35.1
5,0°	2509.4	60.0	95.1
7,5°	2342.7	83.8	178.9
10,0°	2101.4	100.0	278.9
12,5°	1793.5	106.4	385.4
15,0°	1462.2	103.7	489.1
17,5°	1137.7	93.8	582.9
20,0°	857.0	80.4	663.2
22,5°	616.7	64.7	727.9
25,0°	449.1	52.0	780.0
27,5°	328.3	41.6	821.5
30,0°	236.7	32.4	854.0
32,5°	154.3	22.7	876.7
35,0°	101.7	16.0	892.7
37,5°	76.7	12.8	905.5
40,0°	64.2	11.3	916.8
42,5°	57.3	10.6	927.4
45,0°	51.1	9.9	937.3
47,5°	44.6	9.0	946.3
50,0°	37.9	8.0	954.3
52,5°	31.6	6.9	961.2
55,0°	26.8	6.0	967.2
57,5°	24.1	5.6	972.7
60,0°	21.5	5.1	977.8
62,5°	18.8	4.6	982.4
65,0°	15.7	3.9	986.3
67,5°	12.6	3.2	989.5
70,0°	10.1	2.6	992.1
72,5°	8.3	2.2	994.3
75,0°	6.8	1.8	996.1
77,5°	5.4	1.5	997.5
80,0°	4.1	1.1	998.7
82,5°	2.8	0.8	999.4
85,0°	1.6	0.4	999.9
87,5°	0.5	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE33DA2DC2C EAN: 4069025447432	LP number 59940_15
-----------------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.1	21.2	20.4	21.5	21.8	20.1	21.2	20.4	21.5	21.8
	3H	20.7	21.6	21.1	22.0	22.3	20.7	21.6	21.1	22.0	22.3
	4H	20.9	21.8	21.3	22.1	22.5	20.9	21.8	21.3	22.1	22.5
	6H	21.1	21.9	21.6	22.3	22.7	21.1	21.9	21.6	22.3	22.7
	8H	21.3	21.9	21.7	22.3	22.7	21.3	21.9	21.7	22.3	22.7
	12H	21.3	21.9	21.7	22.3	22.7	21.3	21.9	21.7	22.3	22.7
4H	2H	20.4	21.2	20.8	21.6	21.9	20.4	21.2	20.8	21.6	21.9
	3H	21.1	21.8	21.5	22.2	22.6	21.1	21.8	21.5	22.2	22.6
	4H	21.4	22.0	21.9	22.4	22.9	21.4	22.0	21.9	22.4	22.9
	6H	21.7	22.2	22.1	22.6	23.1	21.7	22.2	22.1	22.6	23.1
	8H	21.8	22.2	22.3	22.7	23.2	21.8	22.2	22.3	22.7	23.2
	12H	21.8	22.2	22.3	22.7	23.2	21.8	22.2	22.3	22.7	23.2
8H	4H	21.5	22.0	22.0	22.4	22.9	21.5	22.0	22.0	22.4	22.9
	6H	21.8	22.2	22.4	22.7	23.2	21.8	22.2	22.4	22.7	23.2
	8H	22.0	22.3	22.5	22.8	23.3	22.0	22.3	22.5	22.8	23.3
	12H	22.1	22.3	22.6	22.8	23.4	22.1	22.3	22.6	22.8	23.4
12H	4H	21.5	21.9	22.0	22.3	22.8	21.5	21.9	22.0	22.3	22.8
	6H	21.9	22.2	22.4	22.6	23.2	21.9	22.2	22.4	22.6	23.2
	8H	22.0	22.3	22.5	22.8	23.3	22.0	22.3	22.5	22.8	23.3

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 62
------------------------	---	---

C-planes	0°
γ	Luminance in cd/m²
45,0°	51454.6
50,0°	42034.6
55,0°	33274.3
60,0°	30593.5
65,0°	26386.4
70,0°	21108.9
75,0°	18779.0
80,0°	16875.8
85,0°	13122.4

Photometric test report


Family
Spot 21 Standard

Order number: 51SE33DA2DC2C
EAN: 4069025447432

LP number
59940_15

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

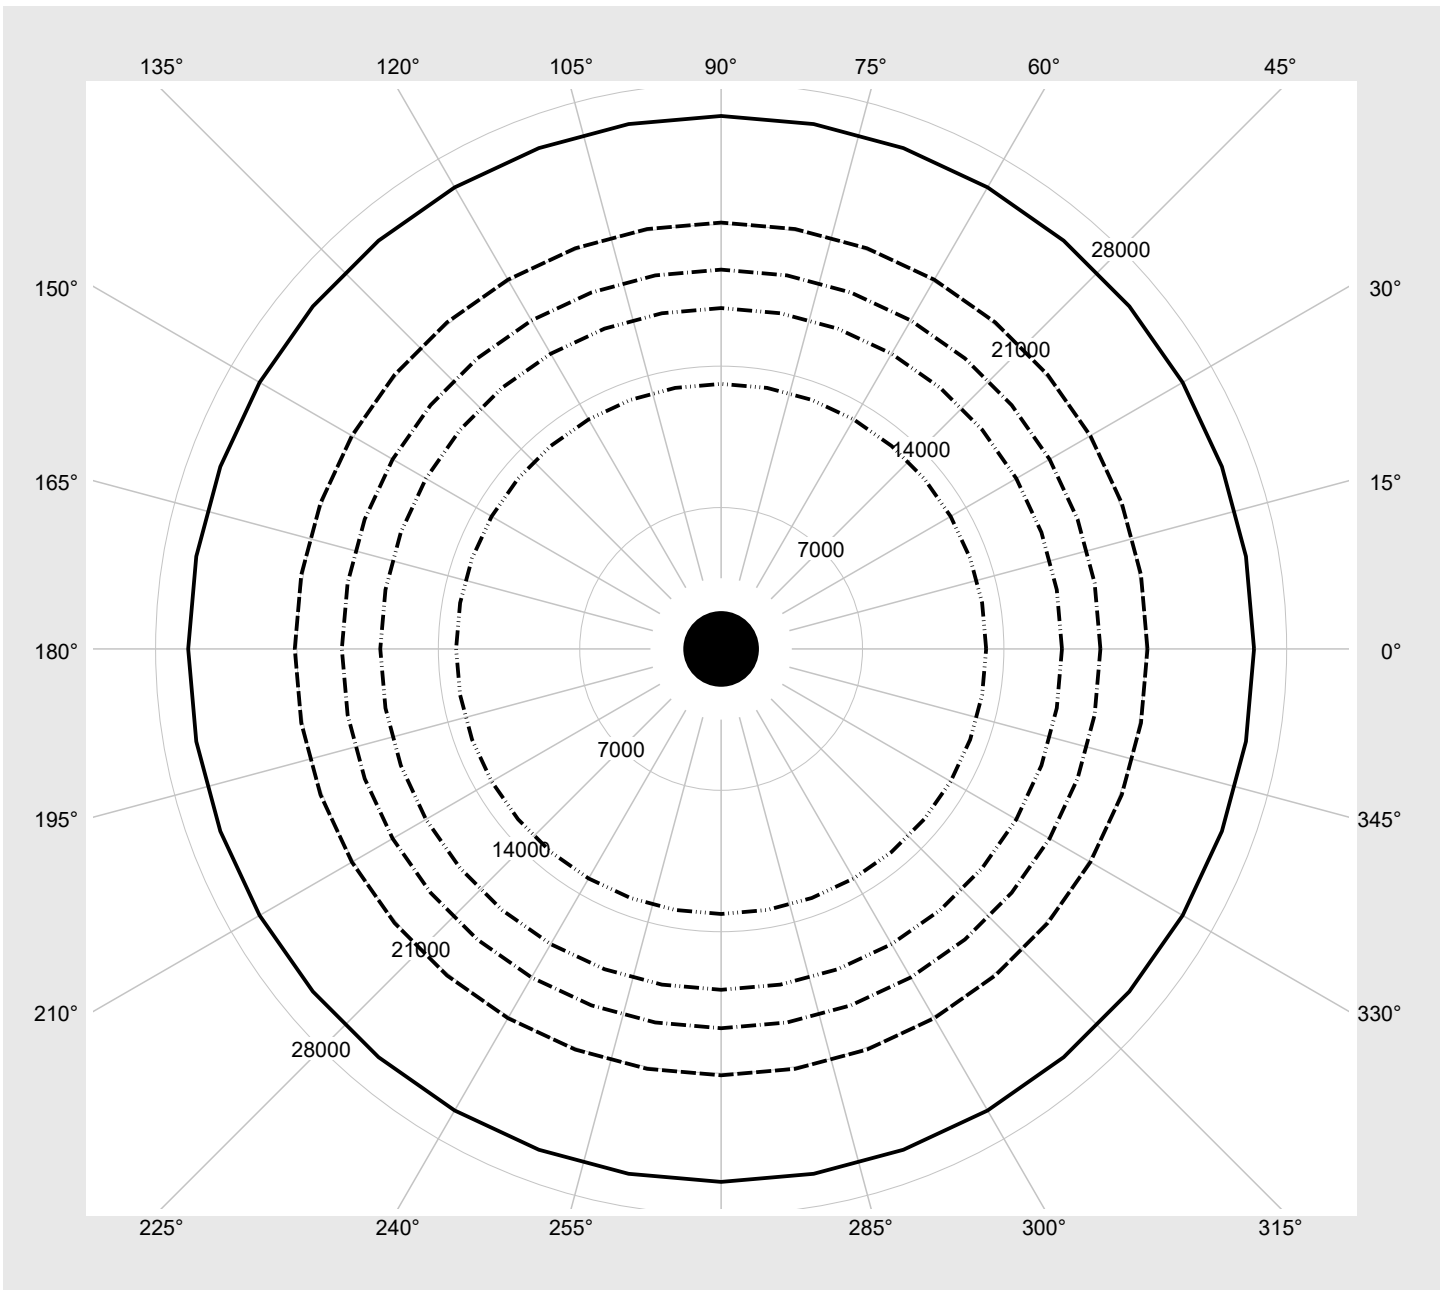

Photometric test report

Family Spot 21 Standard	Order number: 51SE33DA2DC2C EAN: 4069025447432	LP number 59940_15
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
11	ON	OFF	ON	ON	3550	28.0
10	ON	OFF	ON	OFF	3330	25.8
9	ON	OFF	OFF	ON	3110	23.7
8	ON	OFF	OFF	OFF	2870	21.6
7	OFF	ON	ON	ON	2640	19.8
6	OFF	ON	ON	OFF	2400	17.7
5	OFF	ON	OFF	ON	2150	15.6
4	OFF	ON	OFF	OFF	1900	13.8
3	OFF	OFF	ON	ON	1640	11.7
2	OFF	OFF	ON	OFF	1380	9.9
1	OFF	OFF	OFF	ON	1110	8.0
0	OFF	OFF	OFF	OFF	830	6.2