




Photometric test report

Family Spot 21 Standard	Order number: 51SE34DB11D2C EAN: 4069025447616	LP number 59934_34										
	<table border="0"> <tr> <td>Version</td> <td>housing, black, reflector, cover glass, transparent, wide distribution</td> </tr> <tr> <td>Lamps</td> <td>LED 4000 K CRI ≥ 90</td> </tr> <tr> <td>Controlgear</td> <td>ECG-DALI-Multilumen</td> </tr> <tr> <td>Setting</td> <td>factory setting: DIP-Step=7</td> </tr> <tr> <td>Rated values</td> <td> Net luminous flux = 2810 lm Power consumption = 19.8 W Luminous efficacy = 141.9 lm/W </td> </tr> </table>	Version	housing, black, reflector, cover glass, transparent, wide distribution	Lamps	LED 4000 K CRI ≥ 90	Controlgear	ECG-DALI-Multilumen	Setting	factory setting: DIP-Step=7	Rated values	Net luminous flux = 2810 lm Power consumption = 19.8 W Luminous efficacy = 141.9 lm/W	serial documentation 11.05.2026 
Version	housing, black, reflector, cover glass, transparent, wide distribution											
Lamps	LED 4000 K CRI ≥ 90											
Controlgear	ECG-DALI-Multilumen											
Setting	factory setting: DIP-Step=7											
Rated values	Net luminous flux = 2810 lm Power consumption = 19.8 W Luminous efficacy = 141.9 lm/W											

Luminous intensity in cd/klm C180-0 **Imax: 1518 cd/klm**

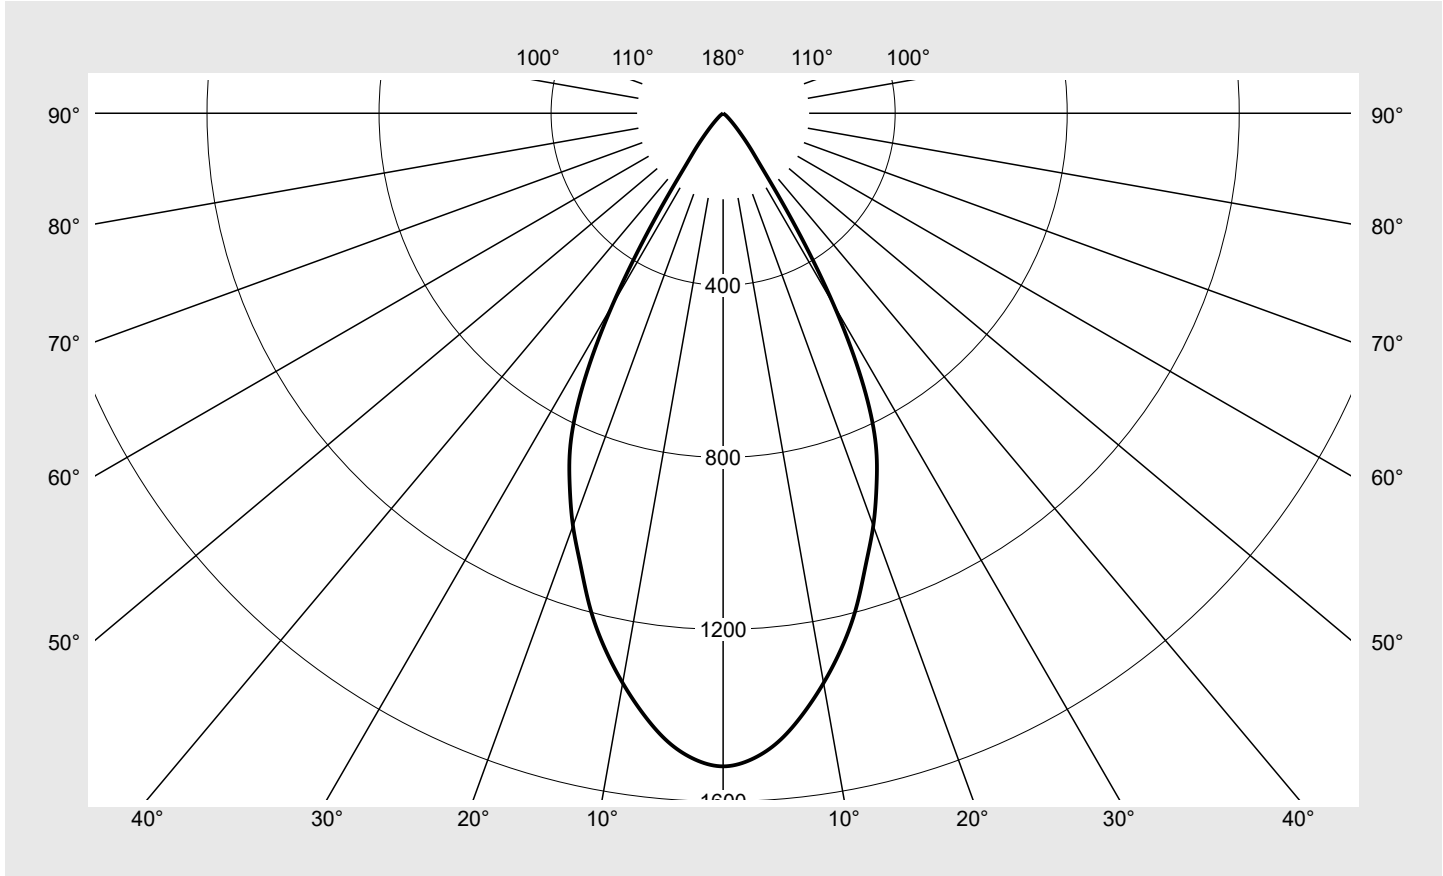

Classifications	
DIN 5040	A 8 0
CIE	N1=98 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Standard	Order number: 51SE34DB11D2C EAN: 4069025447616	LP number 59934_34
-----------------------------------	---	------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	1518.5	2.3	2.3
2,5°	1503.9	18.0	20.3
5,0°	1467.3	35.1	55.3
7,5°	1410.8	50.5	105.8
10,0°	1345.0	64.0	169.8
12,5°	1273.2	75.5	245.4
15,0°	1192.8	84.6	330.0
17,5°	1102.1	90.9	420.8
20,0°	1020.8	95.7	516.6
22,5°	932.5	97.8	614.4
25,0°	836.7	96.9	711.3
27,5°	696.4	88.2	799.5
30,0°	514.1	70.5	869.9
32,5°	318.7	46.9	916.9
35,0°	172.5	27.1	944.0
37,5°	109.8	18.3	962.3
40,0°	70.5	12.4	974.8
42,5°	44.6	8.3	983.0
45,0°	28.1	5.4	988.5
47,5°	17.7	3.6	992.0
50,0°	11.6	2.4	994.5
52,5°	7.9	1.7	996.2
55,0°	5.3	1.2	997.4
57,5°	3.6	0.8	998.2
60,0°	2.5	0.6	998.8
62,5°	1.8	0.4	999.3
65,0°	1.2	0.3	999.6
67,5°	0.8	0.2	999.8
70,0°	0.5	0.1	999.9
72,5°	0.3	0.1	1000.0
75,0°	0.1	0.0	1000.0
77,5°	0.0	0.0	1000.0
80,0°	0.0	0.0	1000.0
82,5°	0.0	0.0	1000.0
85,0°	0.0	0.0	1000.0
87,5°	0.0	0.0	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE34DB11D2C EAN: 4069025447616	LP number 59934_34
----------------------------	---	-----------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	19.0	20.1	19.3	20.4	20.7	19.0	20.1	19.3	20.4	20.7
	3H	18.8	19.8	19.2	20.1	20.5	18.8	19.8	19.2	20.1	20.5
	4H	18.8	19.6	19.2	20.0	20.3	18.8	19.6	19.2	20.0	20.3
	6H	18.7	19.4	19.1	19.8	20.2	18.7	19.4	19.1	19.8	20.2
	8H	18.8	19.4	19.2	19.8	20.2	18.8	19.4	19.2	19.8	20.2
	12H	18.7	19.3	19.2	19.7	20.1	18.7	19.3	19.2	19.7	20.1
4H	2H	18.8	19.6	19.2	20.0	20.4	18.8	19.6	19.2	20.0	20.4
	3H	18.6	19.3	19.0	19.7	20.1	18.6	19.3	19.0	19.7	20.1
	4H	18.5	19.1	18.9	19.5	19.9	18.5	19.1	18.9	19.5	19.9
	6H	18.3	18.9	18.8	19.3	19.8	18.3	18.9	18.8	19.3	19.8
	8H	18.3	18.8	18.8	19.2	19.7	18.3	18.8	18.8	19.2	19.7
	12H	18.3	18.7	18.8	19.1	19.6	18.3	18.7	18.8	19.1	19.6
8H	4H	18.3	18.8	18.8	19.2	19.7	18.3	18.8	18.8	19.2	19.7
	6H	18.2	18.6	18.7	19.0	19.6	18.2	18.6	18.7	19.0	19.6
	8H	18.1	18.4	18.6	18.9	19.5	18.1	18.4	18.6	18.9	19.5
	12H	18.1	18.3	18.6	18.8	19.4	18.1	18.3	18.6	18.8	19.4
12H	4H	18.3	18.7	18.8	19.1	19.6	18.3	18.7	18.8	19.1	19.6
	6H	18.2	18.4	18.7	18.9	19.5	18.2	18.4	18.7	18.9	19.5
	8H	18.1	18.3	18.6	18.8	19.4	18.1	18.3	18.6	18.8	19.4


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
------------------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45,0°	21112.8
50,0°	9622.3
55,0°	4926.9
60,0°	2665.8
65,0°	1513.4
70,0°	779.4
75,0°	205.6
80,0°	0.0
85,0°	0.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE34DB11D2C EAN: 4069025447616	LP number 59934_34
-----------------------------------	---	------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

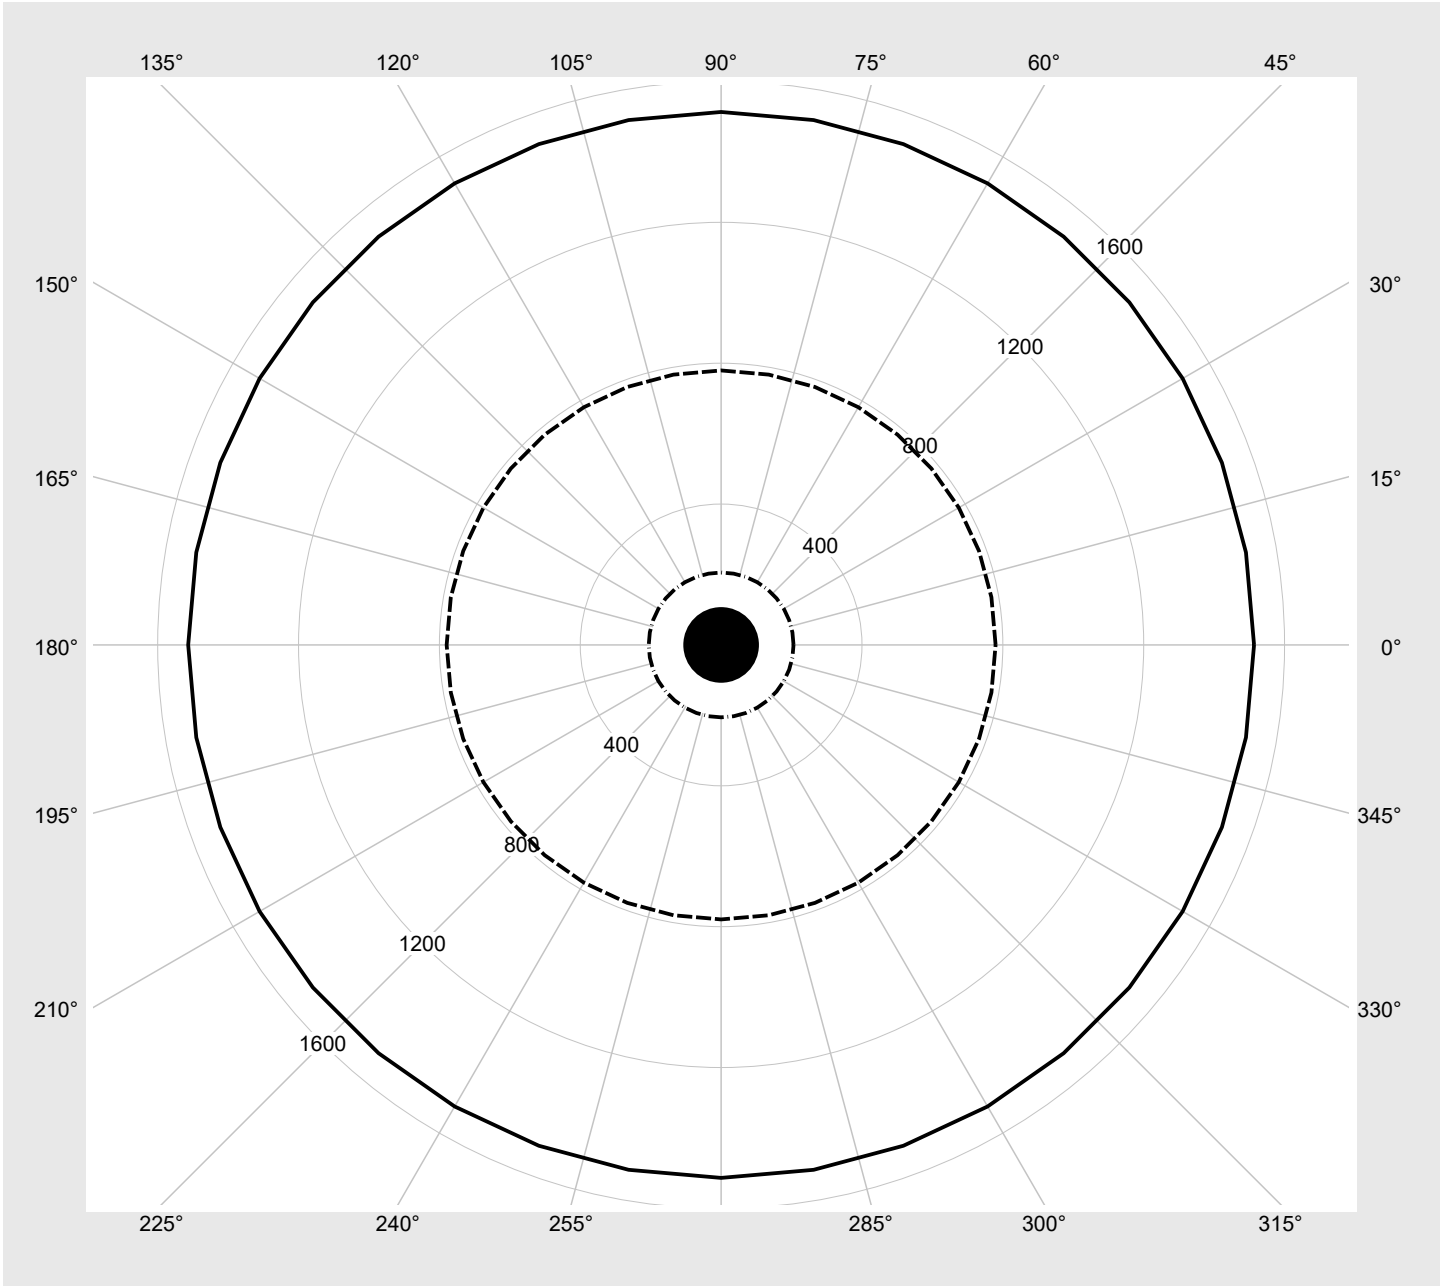

Photometric test report

Family Spot 21 Standard	Order number: 51SE34DB11D2C EAN: 4069025447616	LP number 59934_34
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
11	ON	OFF	ON	ON	3790	28.1
10	ON	OFF	ON	OFF	3550	25.9
9	ON	OFF	OFF	ON	3310	23.8
8	ON	OFF	OFF	OFF	3070	21.7
7	OFF	ON	ON	ON	2810	19.8
6	OFF	ON	ON	OFF	2550	17.7
5	OFF	ON	OFF	ON	2290	15.7
4	OFF	ON	OFF	OFF	2020	13.8
3	OFF	OFF	ON	ON	1750	11.7
2	OFF	OFF	ON	OFF	1470	9.9
1	OFF	OFF	OFF	ON	1180	8.1
0	OFF	OFF	OFF	OFF	880	6.2