




Photometric test report

Family Spot 21 Standard	Order number: 51SE34MB11B2C EAN: 4069025447630	LP number 59934_28										
	<table border="0"> <tr> <td>Version</td> <td>housing, black, reflector, cover glass, transparent, wide distribution</td> </tr> <tr> <td>Lamps</td> <td>LED 3000 K CRI ≥ 90</td> </tr> <tr> <td>Controlgear</td> <td>ECG Multilumen</td> </tr> <tr> <td>Setting</td> <td>factory setting: DIP-Step=4</td> </tr> <tr> <td>Rated values</td> <td>Net luminous flux = 2720 lm Power consumption = 18.5 W Luminous efficacy = 147 lm/W</td> </tr> </table>	Version	housing, black, reflector, cover glass, transparent, wide distribution	Lamps	LED 3000 K CRI ≥ 90	Controlgear	ECG Multilumen	Setting	factory setting: DIP-Step=4	Rated values	Net luminous flux = 2720 lm Power consumption = 18.5 W Luminous efficacy = 147 lm/W	serial documentation 11.05.2026 
Version	housing, black, reflector, cover glass, transparent, wide distribution											
Lamps	LED 3000 K CRI ≥ 90											
Controlgear	ECG Multilumen											
Setting	factory setting: DIP-Step=4											
Rated values	Net luminous flux = 2720 lm Power consumption = 18.5 W Luminous efficacy = 147 lm/W											



Classifications	
DIN 5040	A 8 0
CIE	N1=98 N2=100 N3=100 N4=100 N5=100

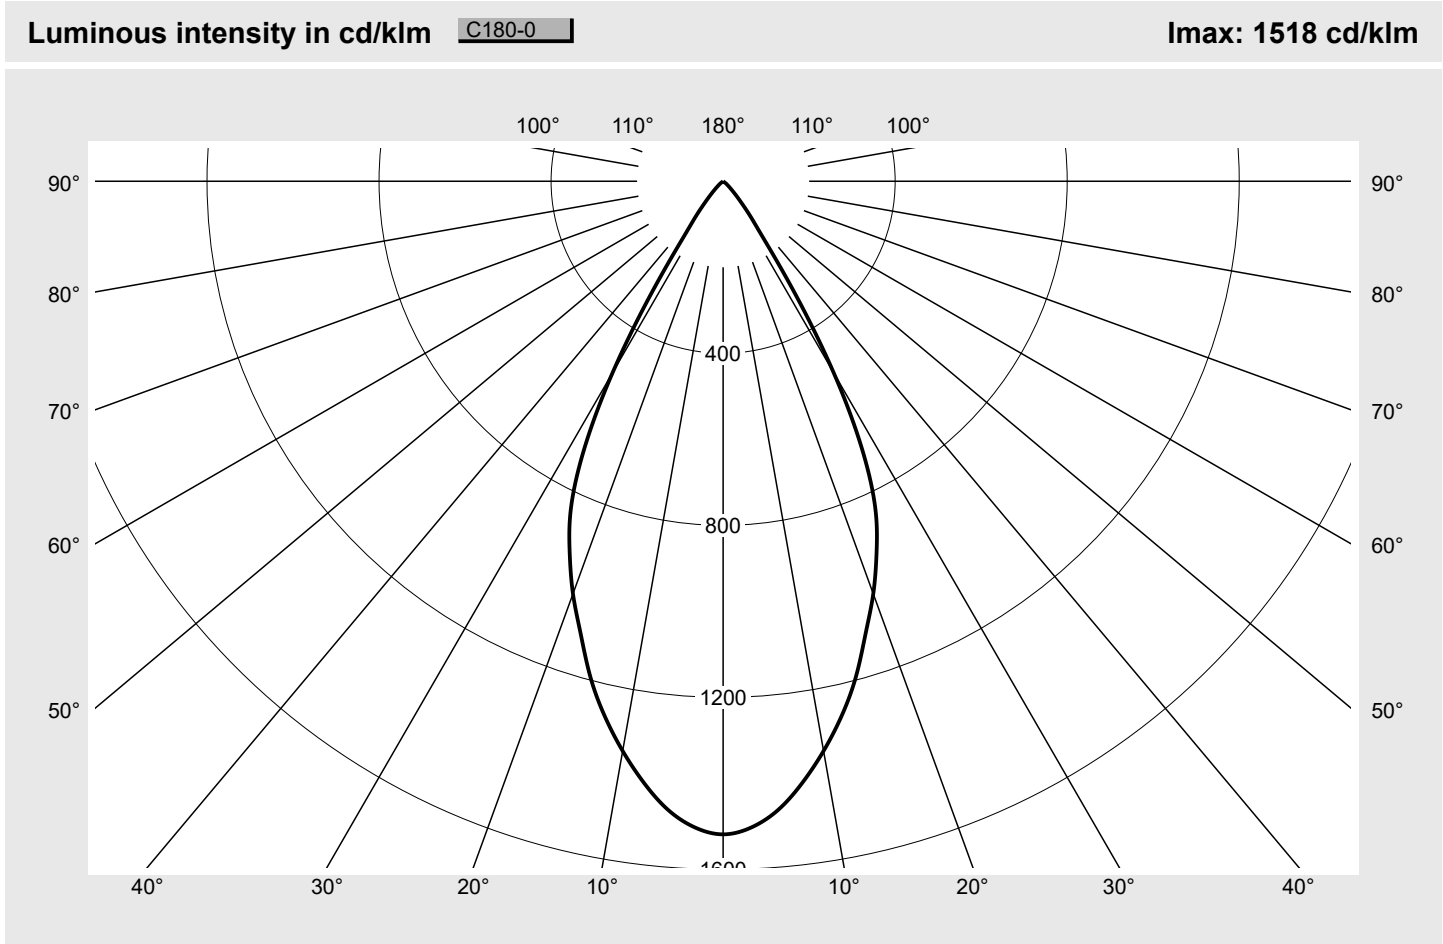Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Standard	Order number: 51SE34MB11B2C EAN: 4069025447630	LP number 59934_28
-----------------------------------	---	------------------------------

Table of values for luminous intensities	Maximum luminous intensity	sITeco
---	-----------------------------------	---------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0,0°	1518.5	2.3	2.3
2,5°	1503.9	18.0	20.3
5,0°	1467.3	35.1	55.3
7,5°	1410.8	50.5	105.8
10,0°	1345.0	64.0	169.8
12,5°	1273.2	75.5	245.4
15,0°	1192.8	84.6	330.0
17,5°	1102.1	90.9	420.8
20,0°	1020.8	95.7	516.6
22,5°	932.5	97.8	614.4
25,0°	836.7	96.9	711.3
27,5°	696.4	88.2	799.5
30,0°	514.1	70.5	869.9
32,5°	318.7	46.9	916.9
35,0°	172.5	27.1	944.0
37,5°	109.8	18.3	962.3
40,0°	70.5	12.4	974.8
42,5°	44.6	8.3	983.0
45,0°	28.1	5.4	988.5
47,5°	17.7	3.6	992.0
50,0°	11.6	2.4	994.5
52,5°	7.9	1.7	996.2
55,0°	5.3	1.2	997.4
57,5°	3.6	0.8	998.2
60,0°	2.5	0.6	998.8
62,5°	1.8	0.4	999.3
65,0°	1.2	0.3	999.6
67,5°	0.8	0.2	999.8
70,0°	0.5	0.1	999.9
72,5°	0.3	0.1	1000.0
75,0°	0.1	0.0	1000.0
77,5°	0.0	0.0	1000.0
80,0°	0.0	0.0	1000.0
82,5°	0.0	0.0	1000.0
85,0°	0.0	0.0	1000.0
87,5°	0.0	0.0	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE34MB11B2C EAN: 4069025447630	LP number 59934_28
----------------------------	---	-----------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.9	20.0	19.2	20.3	20.6	18.9	20.0	19.2	20.3	20.6
	3H	18.7	19.7	19.1	20.0	20.4	18.7	19.7	19.1	20.0	20.4
	4H	18.6	19.5	19.0	19.9	20.2	18.6	19.5	19.0	19.9	20.2
	6H	18.5	19.3	19.0	19.7	20.1	18.5	19.3	19.0	19.7	20.1
	8H	18.7	19.3	19.1	19.6	20.0	18.7	19.3	19.1	19.6	20.0
	12H	18.6	19.2	19.1	19.5	20.0	18.6	19.2	19.1	19.5	20.0
4H	2H	18.6	19.5	19.0	19.9	20.2	18.6	19.5	19.0	19.9	20.2
	3H	18.5	19.2	18.9	19.6	20.0	18.5	19.2	18.9	19.6	20.0
	4H	18.3	19.0	18.8	19.4	19.8	18.3	19.0	18.8	19.4	19.8
	6H	18.2	18.8	18.7	19.2	19.7	18.2	18.8	18.7	19.2	19.7
	8H	18.2	18.7	18.7	19.1	19.6	18.2	18.7	18.7	19.1	19.6
	12H	18.2	18.6	18.7	19.0	19.5	18.2	18.6	18.7	19.0	19.5
8H	4H	18.2	18.7	18.7	19.1	19.6	18.2	18.7	18.7	19.1	19.6
	6H	18.1	18.5	18.6	18.9	19.4	18.1	18.5	18.6	18.9	19.4
	8H	18.0	18.3	18.5	18.8	19.4	18.0	18.3	18.5	18.8	19.4
	12H	18.0	18.2	18.5	18.7	19.3	18.0	18.2	18.5	18.7	19.3
12H	4H	18.2	18.6	18.7	19.0	19.5	18.2	18.6	18.7	19.0	19.5
	6H	18.0	18.3	18.6	18.8	19.4	18.0	18.3	18.6	18.8	19.4
	8H	18.0	18.2	18.5	18.7	19.3	18.0	18.2	18.5	18.7	19.3


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
------------------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45,0°	20436.5
50,0°	9314.1
55,0°	4769.1
60,0°	2580.4
65,0°	1464.9
70,0°	754.5
75,0°	199.0
80,0°	0.0
85,0°	0.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE34MB11B2C EAN: 4069025447630	LP number 59934_28
-----------------------------------	---	------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

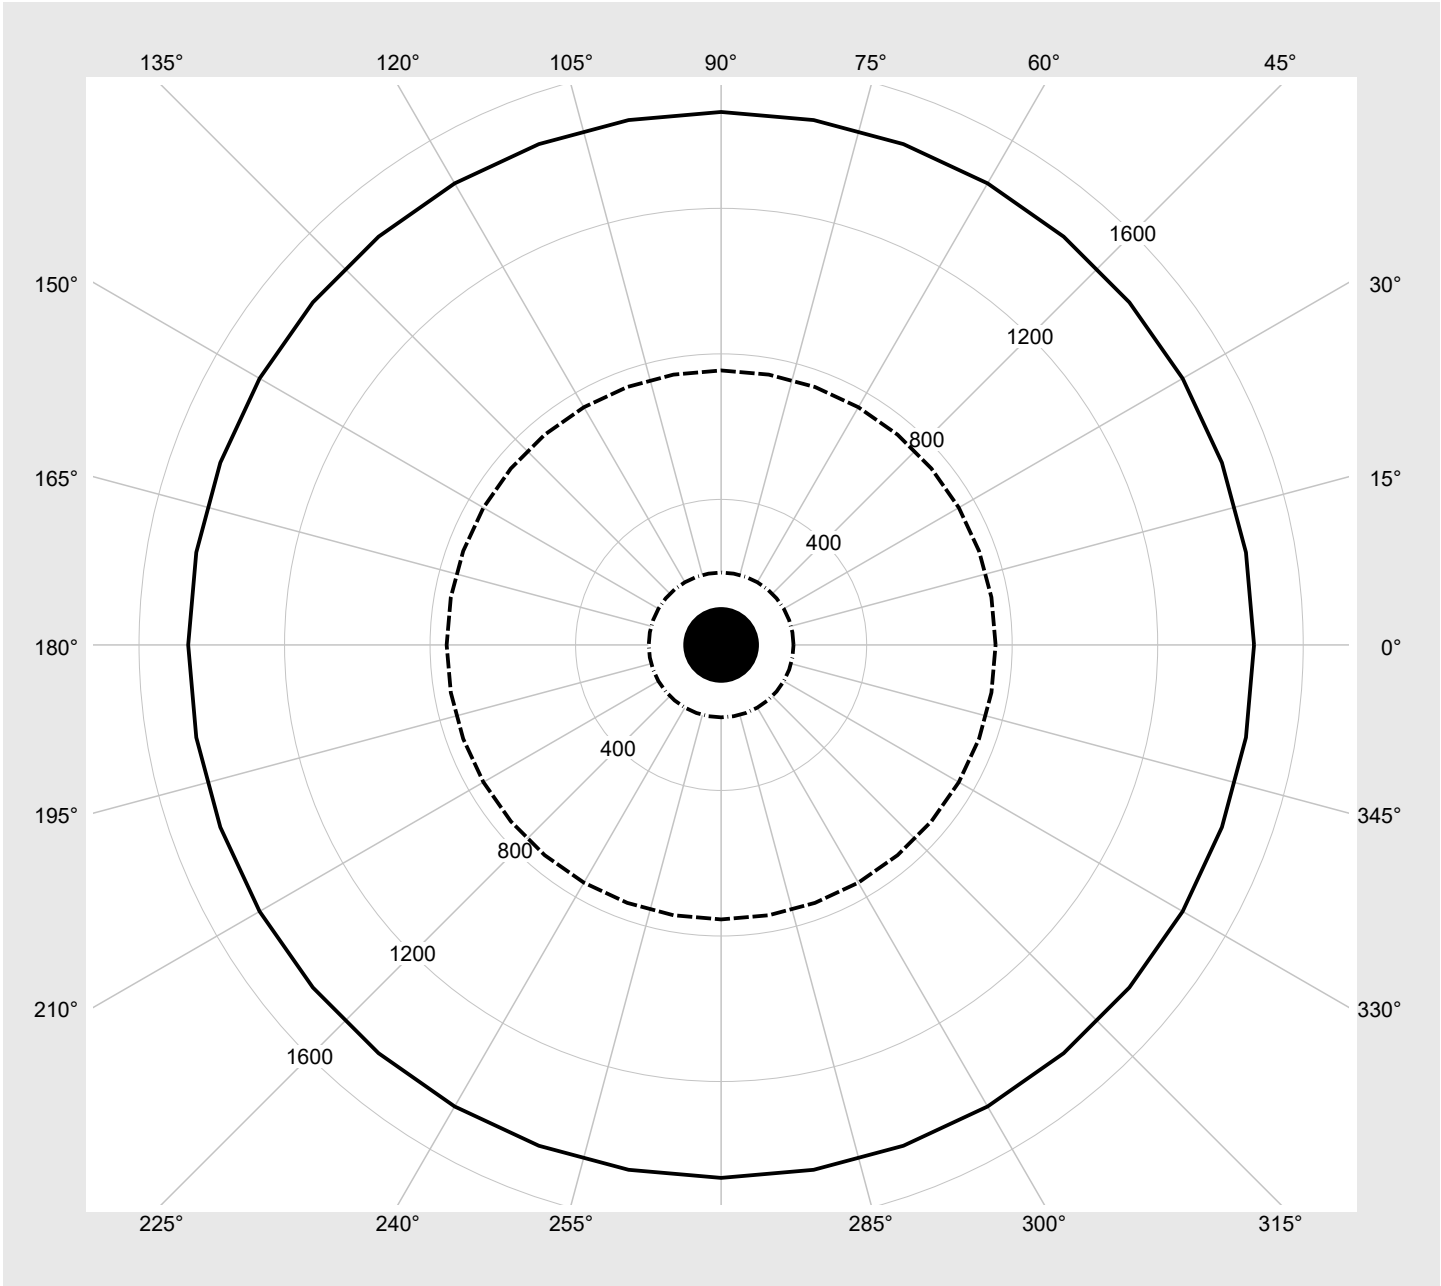

Photometric test report

Family Spot 21 Standard	Order number: 51SE34MB11B2C EAN: 4069025447630	LP number 59934_28
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	3660	26.5
1	ON	OFF	OFF	3430	24.5
2	OFF	ON	OFF	3200	22.5
3	ON	ON	OFF	2960	20.5
4	OFF	OFF	ON	2720	18.5
5	ON	OFF	ON	2470	16.6
6	OFF	ON	ON	2210	14.8
7	ON	ON	ON	1950	12.9