




Photometric test report

Family Spot 21 Standard	Order number: 51SE62DA2ED2C EAN: 4069025447777	LP number 59941_16										
	<table border="0"> <tr> <td>Version</td> <td>housing, white aluminium, reflector, lens PMMA, medium distribution</td> </tr> <tr> <td>Lamps</td> <td>LED 4000 K CRI ≥ 90</td> </tr> <tr> <td>Controlgear</td> <td>ECG-DALI-Multilumen</td> </tr> <tr> <td>Setting</td> <td>factory setting: DIP-Step=5</td> </tr> <tr> <td>Rated values</td> <td>Net luminous flux = 2210 lm Power consumption = 15.6 W Luminous efficacy = 141.7 lm/W</td> </tr> </table>	Version	housing, white aluminium, reflector, lens PMMA, medium distribution	Lamps	LED 4000 K CRI ≥ 90	Controlgear	ECG-DALI-Multilumen	Setting	factory setting: DIP-Step=5	Rated values	Net luminous flux = 2210 lm Power consumption = 15.6 W Luminous efficacy = 141.7 lm/W	serial documentation 11.05.2026 
Version	housing, white aluminium, reflector, lens PMMA, medium distribution											
Lamps	LED 4000 K CRI ≥ 90											
Controlgear	ECG-DALI-Multilumen											
Setting	factory setting: DIP-Step=5											
Rated values	Net luminous flux = 2210 lm Power consumption = 15.6 W Luminous efficacy = 141.7 lm/W											

Luminous intensity in cd/klm C180-0 **Imax: 3026 cd/klm**

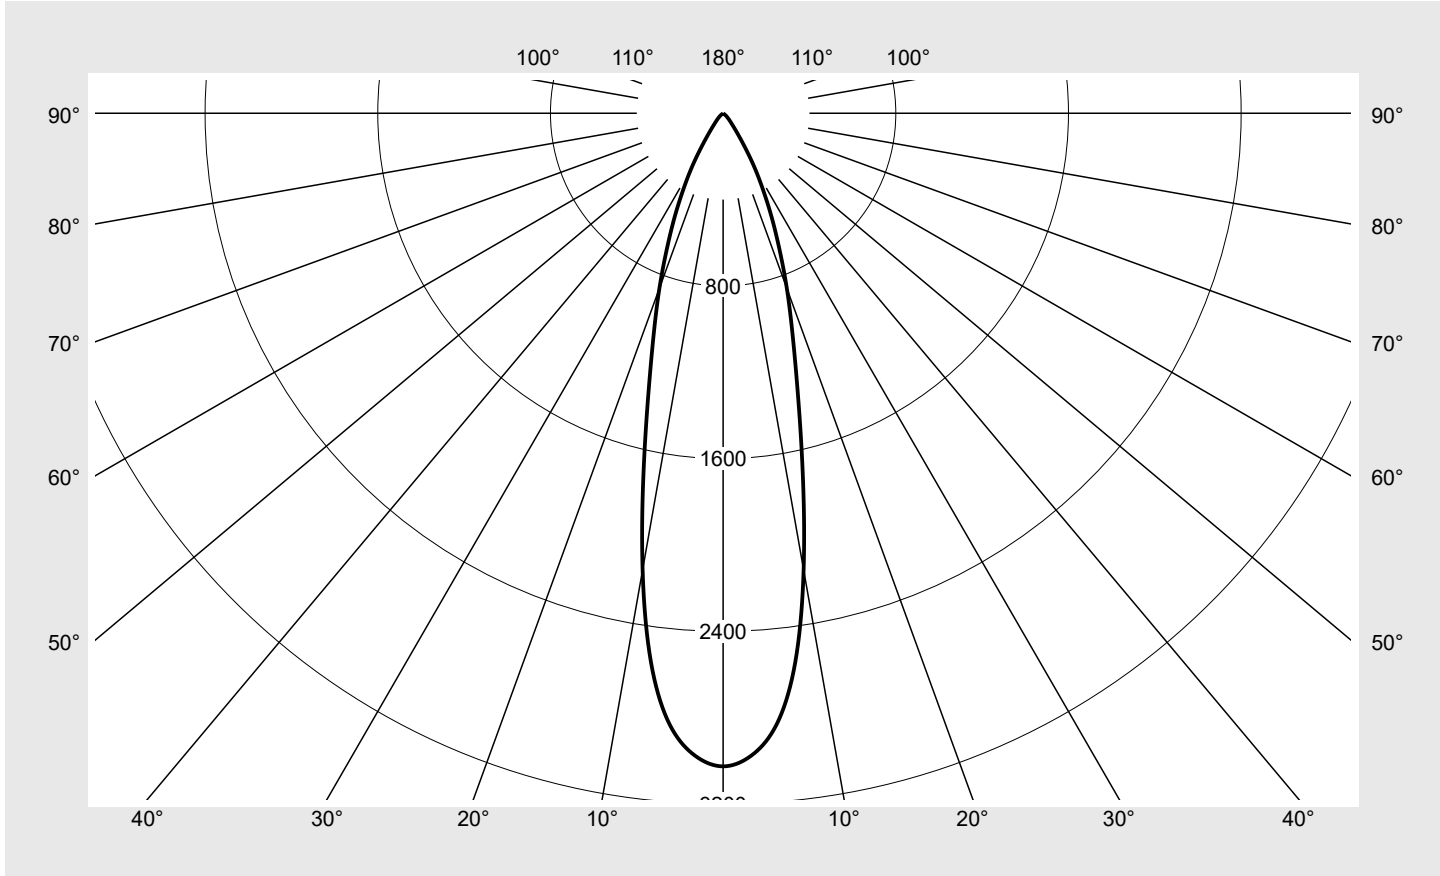

Classifications	
DIN 5040	A 8 0
CIE	N1=96 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Standard	Order number: 51SE62DA2ED2C EAN: 4069025447777	LP number 59941_16
-----------------------------------	---	------------------------------

sitEco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	3025.7	4.5	4.5
2,5°	2979.2	35.6	40.1
5,0°	2842.5	67.9	108.1
7,5°	2563.3	91.7	199.8
10,0°	2148.0	102.2	302.0
12,5°	1703.6	101.1	403.1
15,0°	1334.8	94.7	497.8
17,5°	1067.8	88.0	585.8
20,0°	862.9	80.9	666.7
22,5°	681.8	71.5	738.3
25,0°	533.0	61.7	800.0
27,5°	402.1	50.9	850.9
30,0°	293.4	40.2	891.1
32,5°	193.5	28.5	919.6
35,0°	123.6	19.4	939.1
37,5°	81.8	13.6	952.7
40,0°	57.0	10.1	962.8
42,5°	42.5	7.9	970.6
45,0°	31.1	6.0	976.7
47,5°	23.0	4.6	981.3
50,0°	16.9	3.5	984.9
52,5°	12.1	2.6	987.5
55,0°	10.0	2.3	989.7
57,5°	8.6	2.0	991.7
60,0°	7.2	1.7	993.4
62,5°	5.9	1.4	994.9
65,0°	4.7	1.2	996.1
67,5°	3.6	0.9	997.0
70,0°	2.8	0.7	997.7
72,5°	2.4	0.6	998.3
75,0°	2.0	0.5	998.9
77,5°	1.5	0.4	999.3
80,0°	1.2	0.3	999.6
82,5°	0.8	0.2	999.8
85,0°	0.5	0.1	999.9
87,5°	0.2	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE62DA2ED2C EAN: 4069025447777	LP number 59941_16
----------------------------	---	-----------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.0	19.0	18.4	19.3	19.6	18.0	19.0	18.4	19.3	19.6
	3H	17.9	18.8	18.3	19.2	19.5	17.9	18.8	18.3	19.2	19.5
	4H	17.9	18.7	18.3	19.1	19.5	17.9	18.7	18.3	19.1	19.5
	6H	18.0	18.6	18.4	19.0	19.4	18.0	18.6	18.4	19.0	19.4
	8H	18.0	18.6	18.5	19.0	19.4	18.0	18.6	18.5	19.0	19.4
	12H	18.0	18.5	18.4	18.9	19.3	18.0	18.5	18.4	18.9	19.3
4H	2H	17.9	18.7	18.3	19.0	19.4	17.9	18.7	18.3	19.0	19.4
	3H	17.8	18.5	18.3	18.9	19.3	17.8	18.5	18.3	18.9	19.3
	4H	17.8	18.4	18.3	18.8	19.3	17.8	18.4	18.3	18.8	19.3
	6H	17.8	18.3	18.3	18.7	19.2	17.8	18.3	18.3	18.7	19.2
	8H	17.8	18.2	18.3	18.7	19.2	17.8	18.2	18.3	18.7	19.2
	12H	17.8	18.1	18.3	18.6	19.1	17.8	18.1	18.3	18.6	19.1
8H	4H	17.7	18.1	18.2	18.6	19.1	17.7	18.1	18.2	18.6	19.1
	6H	17.7	18.0	18.2	18.5	19.0	17.7	18.0	18.2	18.5	19.0
	8H	17.7	18.0	18.2	18.5	19.0	17.7	18.0	18.2	18.5	19.0
	12H	17.7	17.9	18.3	18.4	19.0	17.7	17.9	18.3	18.4	19.0
12H	4H	17.7	18.0	18.2	18.5	19.0	17.7	18.0	18.2	18.5	19.0
	6H	17.7	18.0	18.2	18.4	19.0	17.7	18.0	18.2	18.4	19.0
	8H	17.7	17.9	18.2	18.4	19.0	17.7	17.9	18.2	18.4	19.0

siteco

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 62
------------------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45,0°	32229.6
50,0°	19214.0
55,0°	12817.1
60,0°	10586.4
65,0°	8175.5
70,0°	6018.4
75,0°	5682.0
80,0°	5079.7
85,0°	4216.3


Photometric test report

Family Spot 21 Standard	Order number: 51SE62DA2ED2C EAN: 4069025447777	LP number 59941_16
-----------------------------------	---	------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

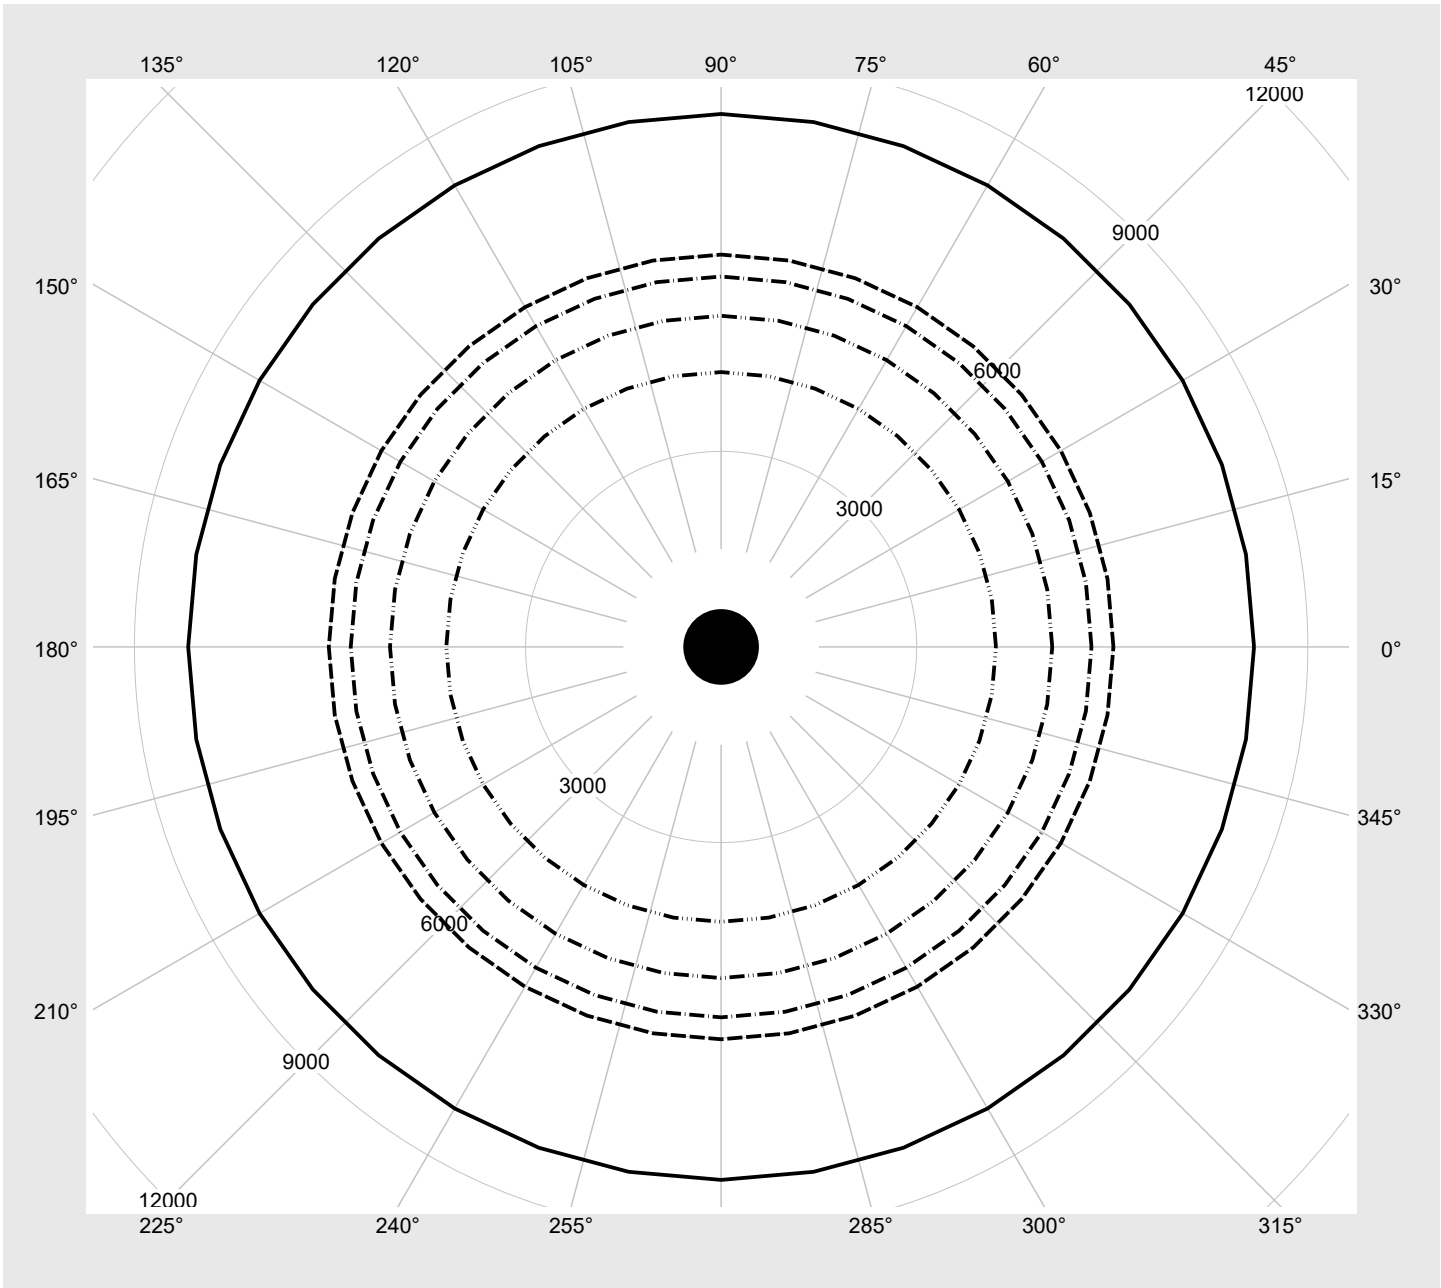

Photometric test report

Family Spot 21 Standard	Order number: 51SE62DA2ED2C EAN: 4069025447777	LP number 59941_16
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
11	ON	OFF	ON	ON	3650	28.0
10	ON	OFF	ON	OFF	3420	25.8
9	ON	OFF	OFF	ON	3190	23.7
8	ON	OFF	OFF	OFF	2950	21.6
7	OFF	ON	ON	ON	2710	19.8
6	OFF	ON	ON	OFF	2460	17.7
5	OFF	ON	OFF	ON	2210	15.6
4	OFF	ON	OFF	OFF	1950	13.8
3	OFF	OFF	ON	ON	1690	11.7
2	OFF	OFF	ON	OFF	1420	9.9
1	OFF	OFF	OFF	ON	1140	8.0
0	OFF	OFF	OFF	OFF	860	6.2