




Photometric test report

Family Spot 21 Standard	Order number: 51SE62MA2EB2C EAN: 4069025447838	LP number 59941_10										
	<table border="0"> <tr> <td>Version</td> <td>housing, white aluminium, reflector, lens PMMA, medium distribution</td> </tr> <tr> <td>Lamps</td> <td>LED 3000 K CRI ≥ 90</td> </tr> <tr> <td>Controlgear</td> <td>ECG Multilumen</td> </tr> <tr> <td>Setting</td> <td>factory setting: DIP-Step=6</td> </tr> <tr> <td>Rated values</td> <td>Net luminous flux = 2130 lm Power consumption = 14.8 W Luminous efficacy = 143.9 lm/W</td> </tr> </table>	Version	housing, white aluminium, reflector, lens PMMA, medium distribution	Lamps	LED 3000 K CRI ≥ 90	Controlgear	ECG Multilumen	Setting	factory setting: DIP-Step=6	Rated values	Net luminous flux = 2130 lm Power consumption = 14.8 W Luminous efficacy = 143.9 lm/W	serial documentation 11.05.2026 
Version	housing, white aluminium, reflector, lens PMMA, medium distribution											
Lamps	LED 3000 K CRI ≥ 90											
Controlgear	ECG Multilumen											
Setting	factory setting: DIP-Step=6											
Rated values	Net luminous flux = 2130 lm Power consumption = 14.8 W Luminous efficacy = 143.9 lm/W											



Classifications	
DIN 5040	A 8 0
CIE	N1=96 N2=99 N3=100 N4=100 N5=100

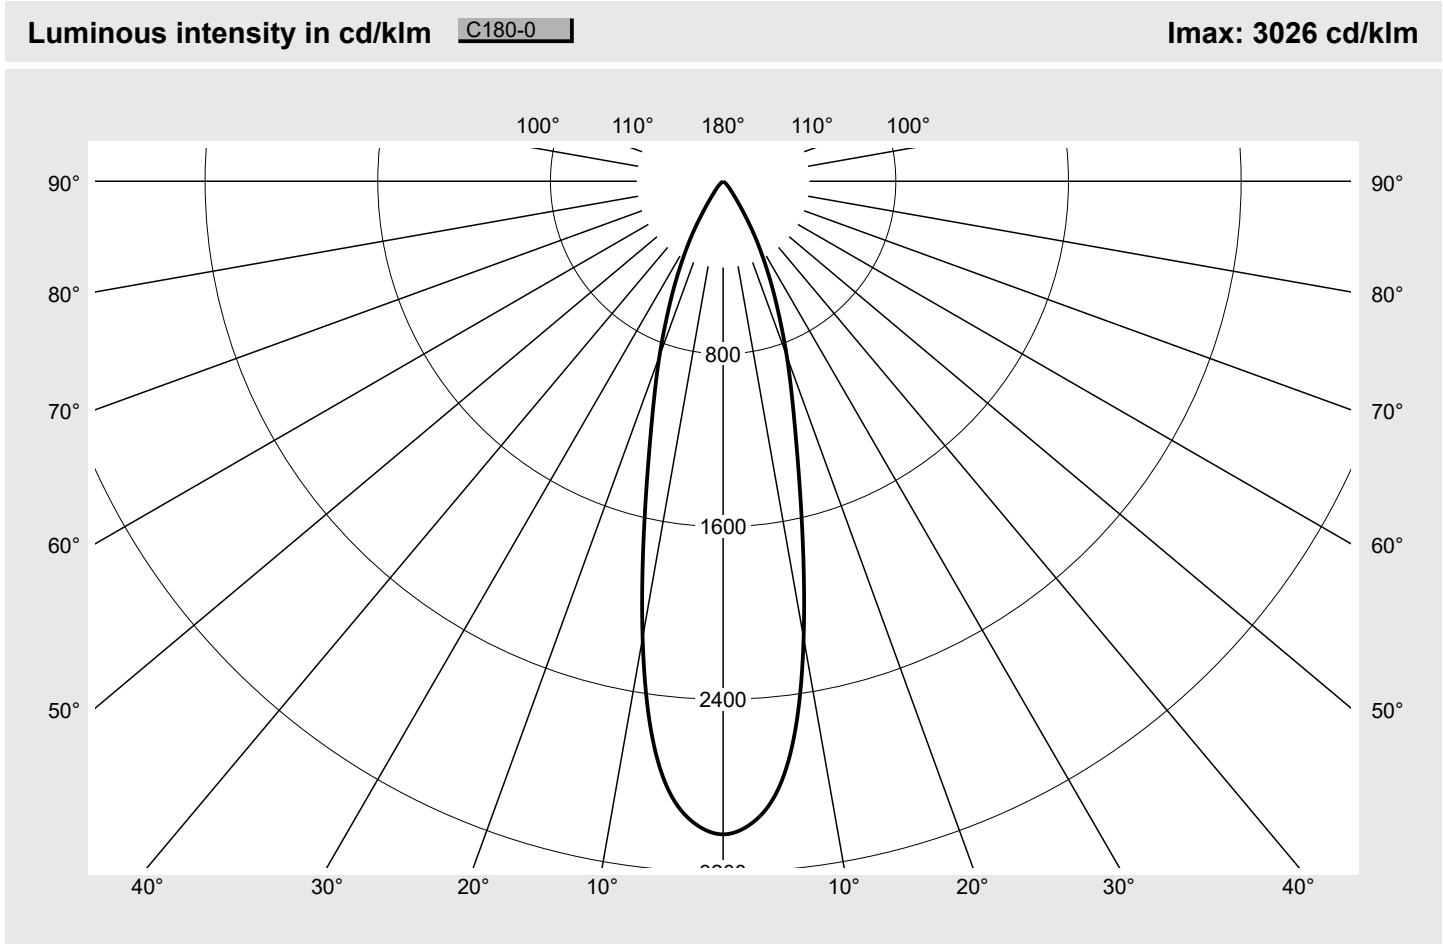Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Standard	Order number: 51SE62MA2EB2C EAN: 4069025447838	LP number 59941_10
-----------------------------------	---	------------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	3025.7	4.5	4.5
2,5°	2979.2	35.6	40.1
5,0°	2842.5	67.9	108.1
7,5°	2563.3	91.7	199.8
10,0°	2148.0	102.2	302.0
12,5°	1703.6	101.1	403.1
15,0°	1334.8	94.7	497.8
17,5°	1067.8	88.0	585.8
20,0°	862.9	80.9	666.7
22,5°	681.8	71.5	738.3
25,0°	533.0	61.7	800.0
27,5°	402.1	50.9	850.9
30,0°	293.4	40.2	891.1
32,5°	193.5	28.5	919.6
35,0°	123.6	19.4	939.1
37,5°	81.8	13.6	952.7
40,0°	57.0	10.1	962.8
42,5°	42.5	7.9	970.6
45,0°	31.1	6.0	976.7
47,5°	23.0	4.6	981.3
50,0°	16.9	3.5	984.9
52,5°	12.1	2.6	987.5
55,0°	10.0	2.3	989.7
57,5°	8.6	2.0	991.7
60,0°	7.2	1.7	993.4
62,5°	5.9	1.4	994.9
65,0°	4.7	1.2	996.1
67,5°	3.6	0.9	997.0
70,0°	2.8	0.7	997.7
72,5°	2.4	0.6	998.3
75,0°	2.0	0.5	998.9
77,5°	1.5	0.4	999.3
80,0°	1.2	0.3	999.6
82,5°	0.8	0.2	999.8
85,0°	0.5	0.1	999.9
87,5°	0.2	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE62MA2EB2C EAN: 4069025447838	LP number 59941_10
----------------------------	---	-----------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	17.9	18.9	18.2	19.2	19.5	17.9	18.9	18.2	19.2	19.5
	3H	17.8	18.7	18.2	19.0	19.4	17.8	18.7	18.2	19.0	19.4
	4H	17.8	18.6	18.2	19.0	19.3	17.8	18.6	18.2	19.0	19.3
	6H	17.8	18.5	18.2	18.9	19.3	17.8	18.5	18.2	18.9	19.3
	8H	17.9	18.4	18.3	18.8	19.2	17.9	18.4	18.3	18.8	19.2
	12H	17.9	18.4	18.3	18.7	19.2	17.9	18.4	18.3	18.7	19.2
4H	2H	17.7	18.5	18.1	18.9	19.3	17.7	18.5	18.1	18.9	19.3
	3H	17.7	18.4	18.1	18.8	19.2	17.7	18.4	18.1	18.8	19.2
	4H	17.7	18.3	18.1	18.7	19.1	17.7	18.3	18.1	18.7	19.1
	6H	17.7	18.2	18.2	18.6	19.1	17.7	18.2	18.2	18.6	19.1
	8H	17.7	18.1	18.1	18.5	19.0	17.7	18.1	18.1	18.5	19.0
	12H	17.7	18.0	18.2	18.5	19.0	17.7	18.0	18.2	18.5	19.0
8H	4H	17.6	18.0	18.1	18.5	19.0	17.6	18.0	18.1	18.5	19.0
	6H	17.6	17.9	18.1	18.4	18.9	17.6	17.9	18.1	18.4	18.9
	8H	17.6	17.9	18.1	18.4	18.9	17.6	17.9	18.1	18.4	18.9
	12H	17.6	17.8	18.1	18.3	18.9	17.6	17.8	18.1	18.3	18.9
12H	4H	17.6	17.9	18.1	18.4	18.9	17.6	17.9	18.1	18.4	18.9
	6H	17.6	17.8	18.1	18.3	18.9	17.6	17.8	18.1	18.3	18.9
	8H	17.6	17.8	18.1	18.3	18.8	17.6	17.8	18.1	18.3	18.8


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 62
-----------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45,0°	31062.9
50,0°	18518.5
55,0°	12353.2
60,0°	10203.2
65,0°	7879.5
70,0°	5800.6
75,0°	5476.3
80,0°	4895.8
85,0°	4063.6

Photometric test report

Family Spot 21 Standard	Order number: 51SE62MA2EB2C EAN: 4069025447838	LP number 59941_10
-----------------------------------	---	------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

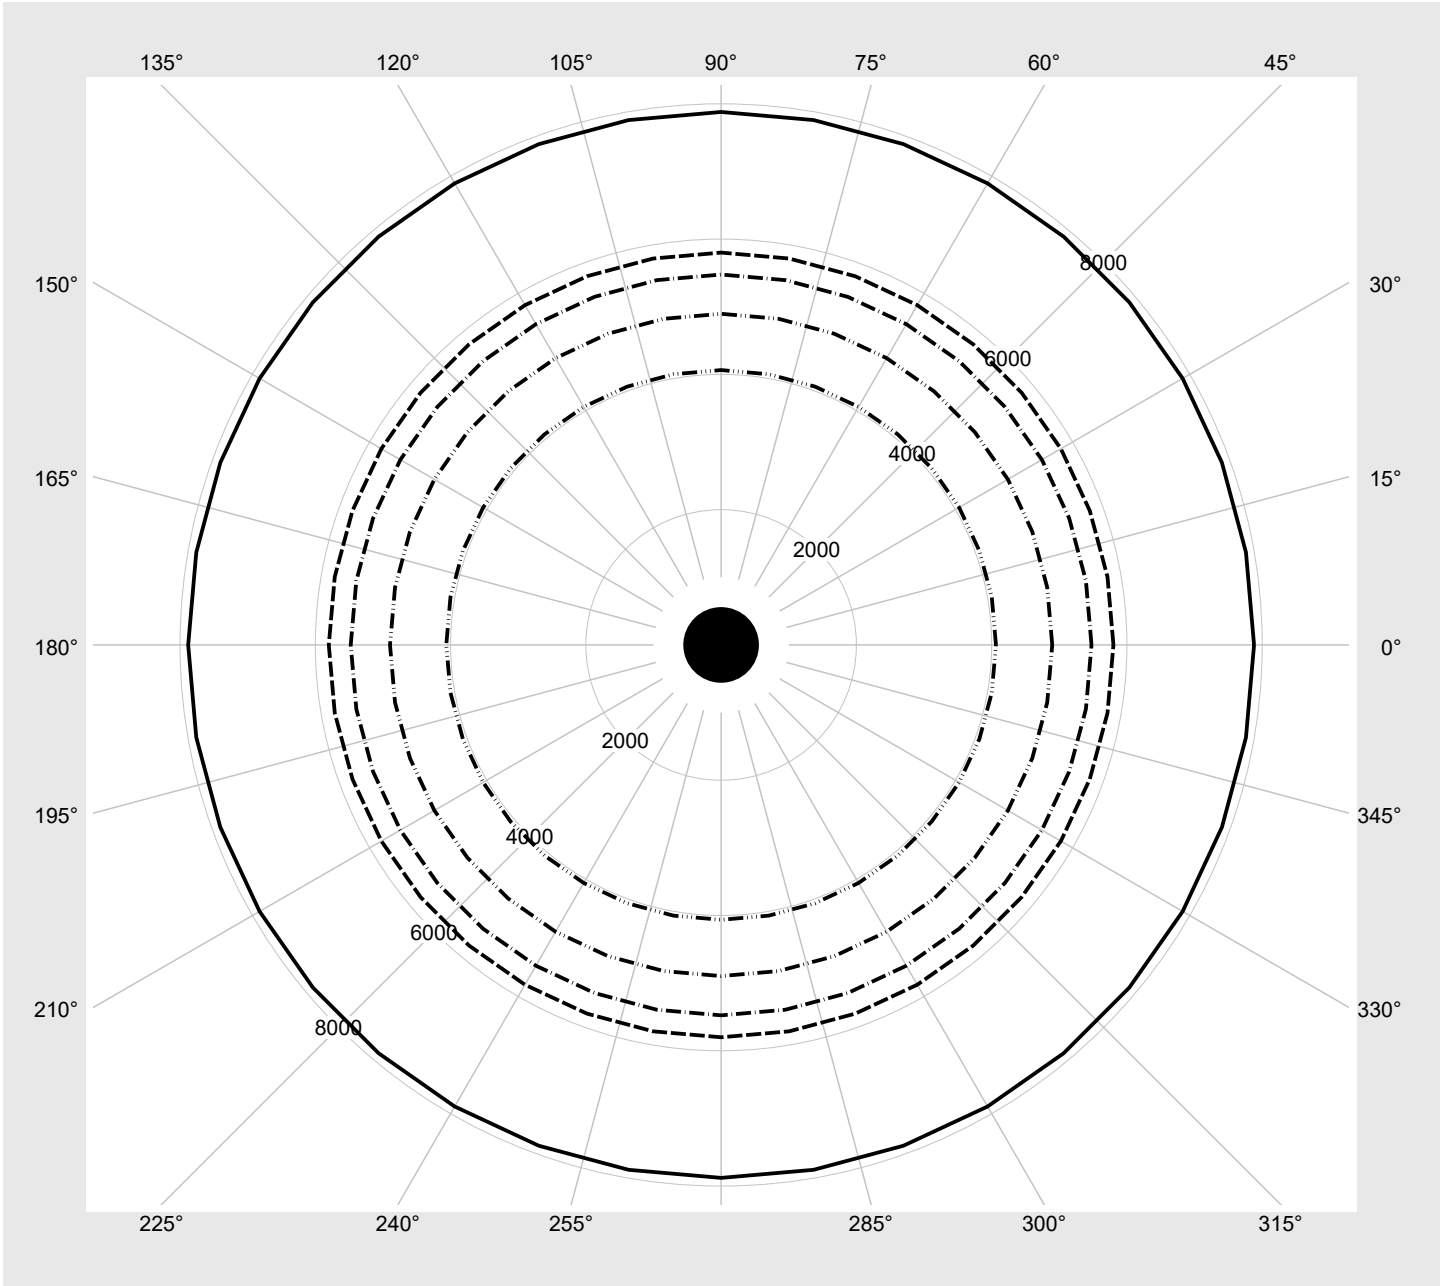

Photometric test report

Family Spot 21 Standard	Order number: 51SE62MA2EB2C EAN: 4069025447838	LP number 59941_10
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	3520	26.5
1	ON	OFF	OFF	3300	24.4
2	OFF	ON	OFF	3080	22.4
3	ON	ON	OFF	2850	20.4
4	OFF	OFF	ON	2620	18.5
5	ON	OFF	ON	2380	16.5
6	OFF	ON	ON	2130	14.8
7	ON	ON	ON	1880	12.8