




Photometric test report

Family Spot 21 Standard	Order number: 51SE62MA2ED2C EAN: 4069025447852	LP number 59941_12
	Version housing, white aluminium, reflector, lens PMMA, medium distribution	serial documentation 11.05.2026
	Lamps LED 4000 K CRI ≥ 90 Controlgear ECG Multilumen Setting factory setting: DIP-Step=6 Rated values Net luminous flux = 2210 lm Power consumption = 14.8 W Luminous efficacy = 149.3 lm/W	
		

Luminous intensity in cd/klm C180-0 **Imax: 3026 cd/klm**

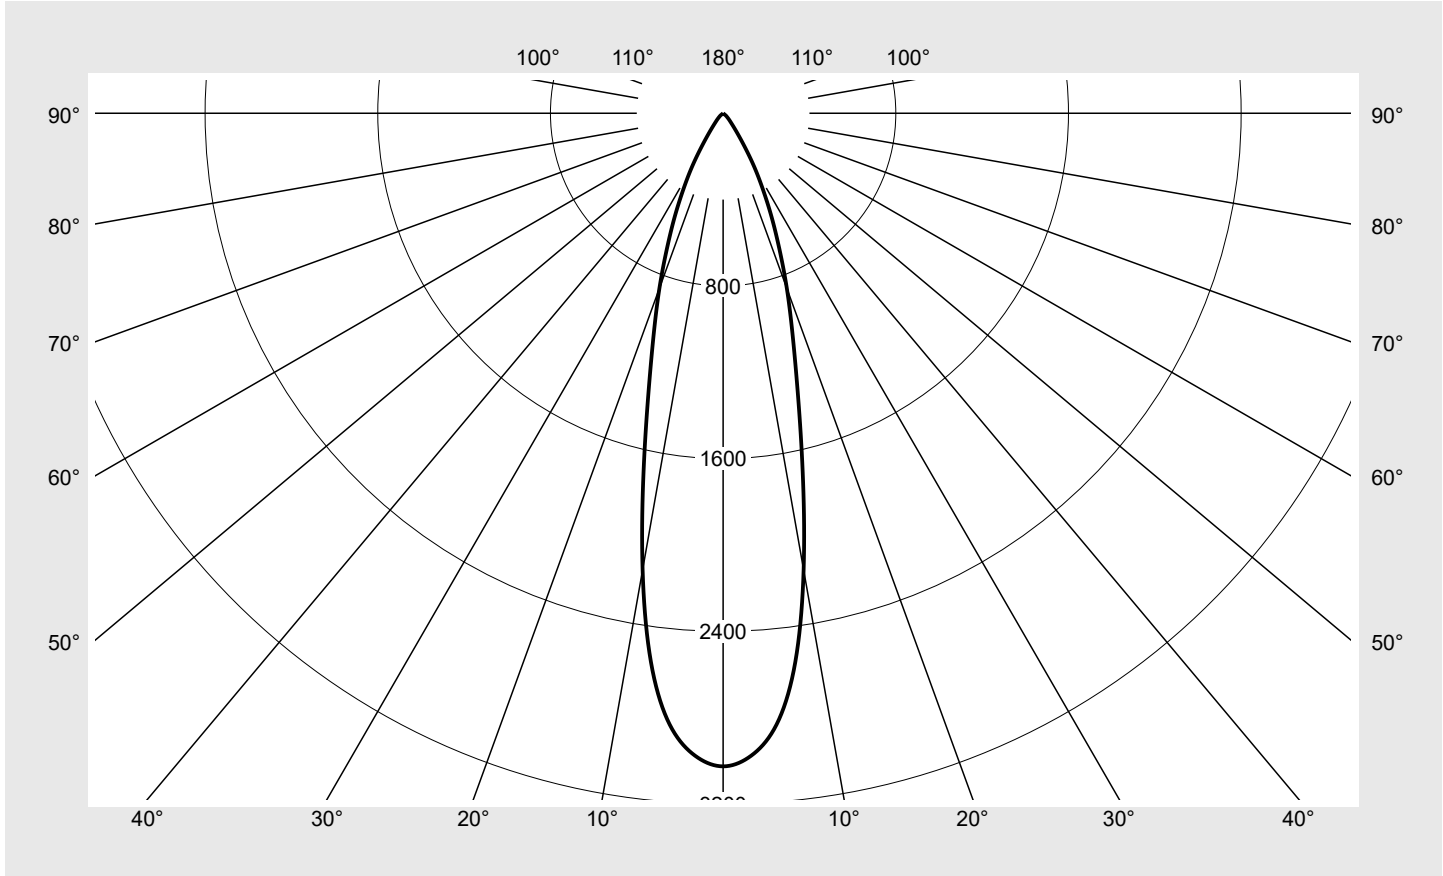

Classifications	
DIN 5040	A 8 0
CIE	N1=96 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Standard	Order number: 51SE62MA2ED2C EAN: 4069025447852	LP number 59941_12
-----------------------------------	---	------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	3025.7	4.5	4.5
2,5°	2979.2	35.6	40.1
5,0°	2842.5	67.9	108.1
7,5°	2563.3	91.7	199.8
10,0°	2148.0	102.2	302.0
12,5°	1703.6	101.1	403.1
15,0°	1334.8	94.7	497.8
17,5°	1067.8	88.0	585.8
20,0°	862.9	80.9	666.7
22,5°	681.8	71.5	738.3
25,0°	533.0	61.7	800.0
27,5°	402.1	50.9	850.9
30,0°	293.4	40.2	891.1
32,5°	193.5	28.5	919.6
35,0°	123.6	19.4	939.1
37,5°	81.8	13.6	952.7
40,0°	57.0	10.1	962.8
42,5°	42.5	7.9	970.6
45,0°	31.1	6.0	976.7
47,5°	23.0	4.6	981.3
50,0°	16.9	3.5	984.9
52,5°	12.1	2.6	987.5
55,0°	10.0	2.3	989.7
57,5°	8.6	2.0	991.7
60,0°	7.2	1.7	993.4
62,5°	5.9	1.4	994.9
65,0°	4.7	1.2	996.1
67,5°	3.6	0.9	997.0
70,0°	2.8	0.7	997.7
72,5°	2.4	0.6	998.3
75,0°	2.0	0.5	998.9
77,5°	1.5	0.4	999.3
80,0°	1.2	0.3	999.6
82,5°	0.8	0.2	999.8
85,0°	0.5	0.1	999.9
87,5°	0.2	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE62MA2ED2C EAN: 4069025447852	LP number 59941_12
----------------------------	---	-----------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.0	19.0	18.4	19.3	19.6	18.0	19.0	18.4	19.3	19.6
	3H	17.9	18.8	18.3	19.2	19.5	17.9	18.8	18.3	19.2	19.5
	4H	17.9	18.7	18.3	19.1	19.5	17.9	18.7	18.3	19.1	19.5
	6H	18.0	18.6	18.4	19.0	19.4	18.0	18.6	18.4	19.0	19.4
	8H	18.0	18.6	18.5	19.0	19.4	18.0	18.6	18.5	19.0	19.4
	12H	18.0	18.5	18.4	18.9	19.3	18.0	18.5	18.4	18.9	19.3
4H	2H	17.9	18.7	18.3	19.0	19.4	17.9	18.7	18.3	19.0	19.4
	3H	17.8	18.5	18.3	18.9	19.3	17.8	18.5	18.3	18.9	19.3
	4H	17.8	18.4	18.3	18.8	19.3	17.8	18.4	18.3	18.8	19.3
	6H	17.8	18.3	18.3	18.7	19.2	17.8	18.3	18.3	18.7	19.2
	8H	17.8	18.2	18.3	18.7	19.2	17.8	18.2	18.3	18.7	19.2
	12H	17.8	18.1	18.3	18.6	19.1	17.8	18.1	18.3	18.6	19.1
8H	4H	17.7	18.1	18.2	18.6	19.1	17.7	18.1	18.2	18.6	19.1
	6H	17.7	18.0	18.2	18.5	19.0	17.7	18.0	18.2	18.5	19.0
	8H	17.7	18.0	18.2	18.5	19.0	17.7	18.0	18.2	18.5	19.0
	12H	17.7	17.9	18.3	18.4	19.0	17.7	17.9	18.3	18.4	19.0
12H	4H	17.7	18.0	18.2	18.5	19.0	17.7	18.0	18.2	18.5	19.0
	6H	17.7	18.0	18.2	18.4	19.0	17.7	18.0	18.2	18.4	19.0
	8H	17.7	17.9	18.2	18.4	19.0	17.7	17.9	18.2	18.4	19.0

siteco


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 62
------------------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45,0°	32229.6
50,0°	19214.0
55,0°	12817.1
60,0°	10586.4
65,0°	8175.5
70,0°	6018.4
75,0°	5682.0
80,0°	5079.7
85,0°	4216.3

Photometric test report

Family Spot 21 Standard	Order number: 51SE62MA2ED2C EAN: 4069025447852	LP number 59941_12
-----------------------------------	---	------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

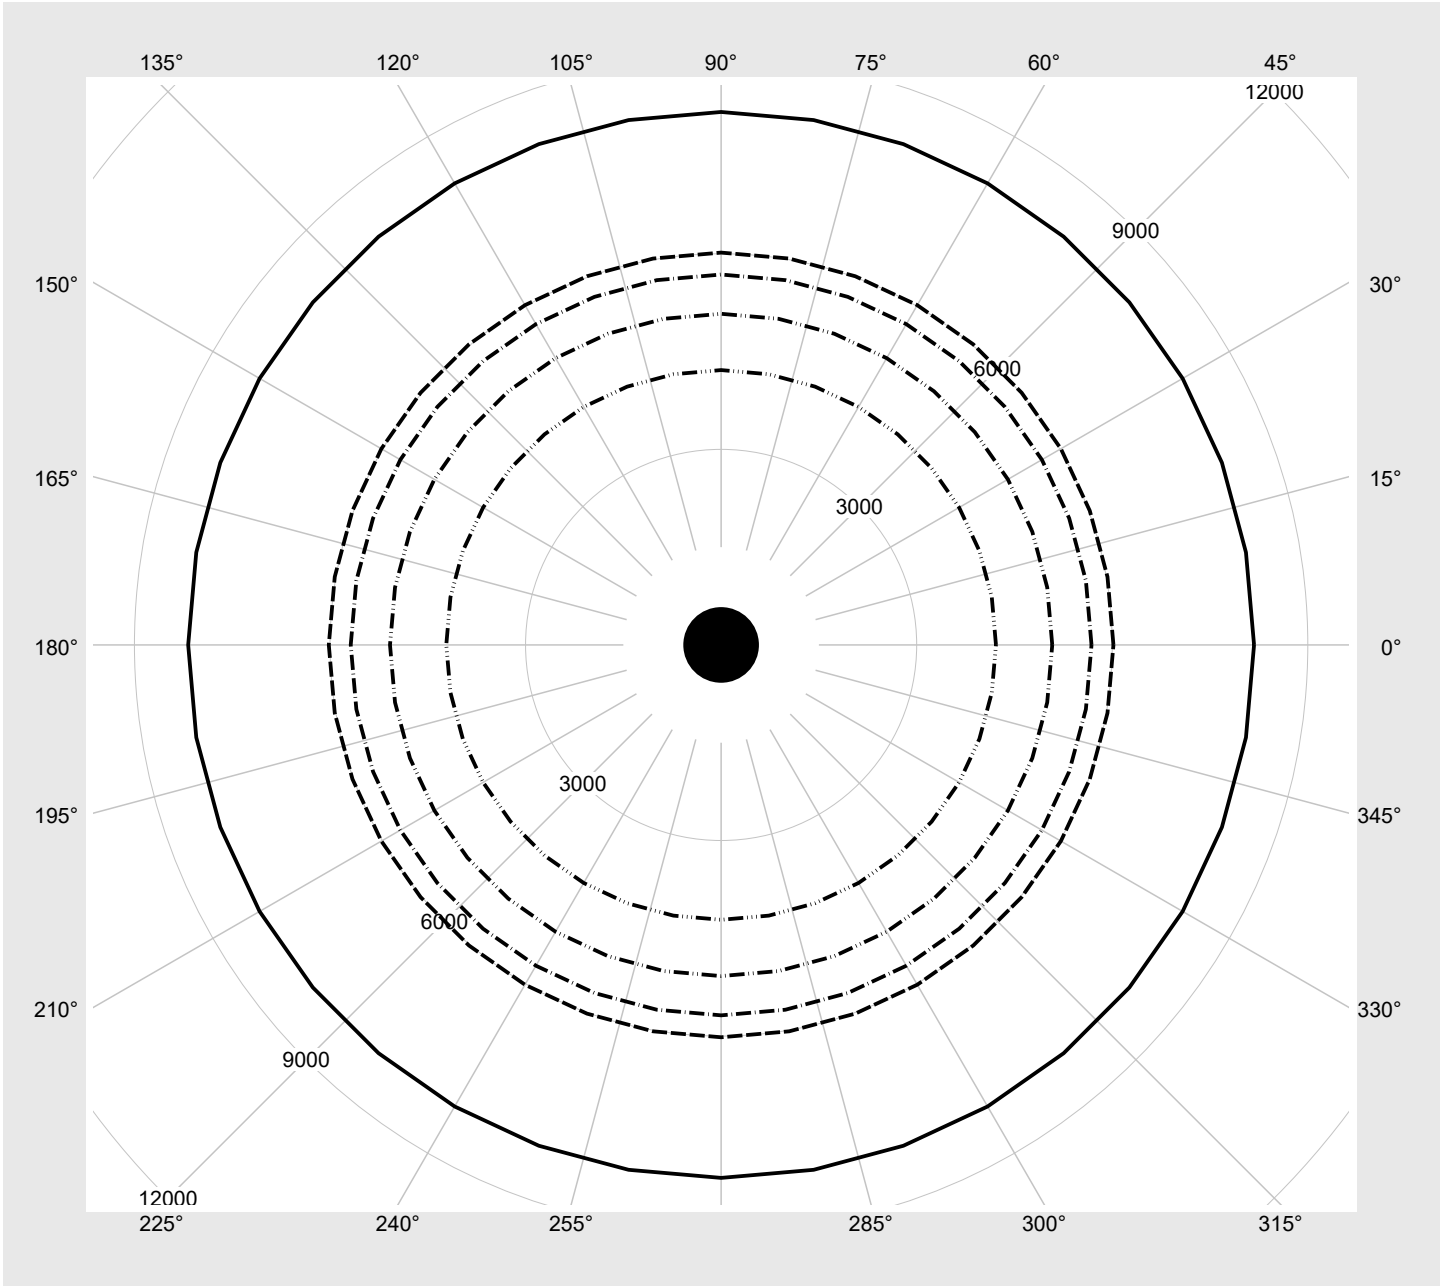

Photometric test report

Family Spot 21 Standard	Order number: 51SE62MA2ED2C EAN: 4069025447852	LP number 59941_12
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	3650	26.5
1	ON	OFF	OFF	3420	24.4
2	OFF	ON	OFF	3190	22.4
3	ON	ON	OFF	2950	20.4
4	OFF	OFF	ON	2710	18.5
5	ON	OFF	ON	2460	16.5
6	OFF	ON	ON	2210	14.8
7	ON	ON	ON	1950	12.8