




Photometric test report

Family Spot 21 Standard	Order number: 51SE62MB11B2C EAN: 4069025447876	LP number 59935_27										
	<table border="0"> <tr> <td>Version</td> <td>housing, white aluminium, reflector, cover glass, transparent, narrow distribution</td> </tr> <tr> <td>Lamps</td> <td>LED 3000 K CRI ≥ 90</td> </tr> <tr> <td>Controlgear</td> <td>ECG Multilumen</td> </tr> <tr> <td>Setting</td> <td>factory setting: DIP-Step=4</td> </tr> <tr> <td>Rated values</td> <td> Net luminous flux = 2810 lm Power consumption = 18.5 W Luminous efficacy = 151.9 lm/W </td> </tr> </table>	Version	housing, white aluminium, reflector, cover glass, transparent, narrow distribution	Lamps	LED 3000 K CRI ≥ 90	Controlgear	ECG Multilumen	Setting	factory setting: DIP-Step=4	Rated values	Net luminous flux = 2810 lm Power consumption = 18.5 W Luminous efficacy = 151.9 lm/W	serial documentation 11.05.2026 
Version	housing, white aluminium, reflector, cover glass, transparent, narrow distribution											
Lamps	LED 3000 K CRI ≥ 90											
Controlgear	ECG Multilumen											
Setting	factory setting: DIP-Step=4											
Rated values	Net luminous flux = 2810 lm Power consumption = 18.5 W Luminous efficacy = 151.9 lm/W											

Luminous intensity in cd/klm C180-0 **Imax: 4553 cd/klm**

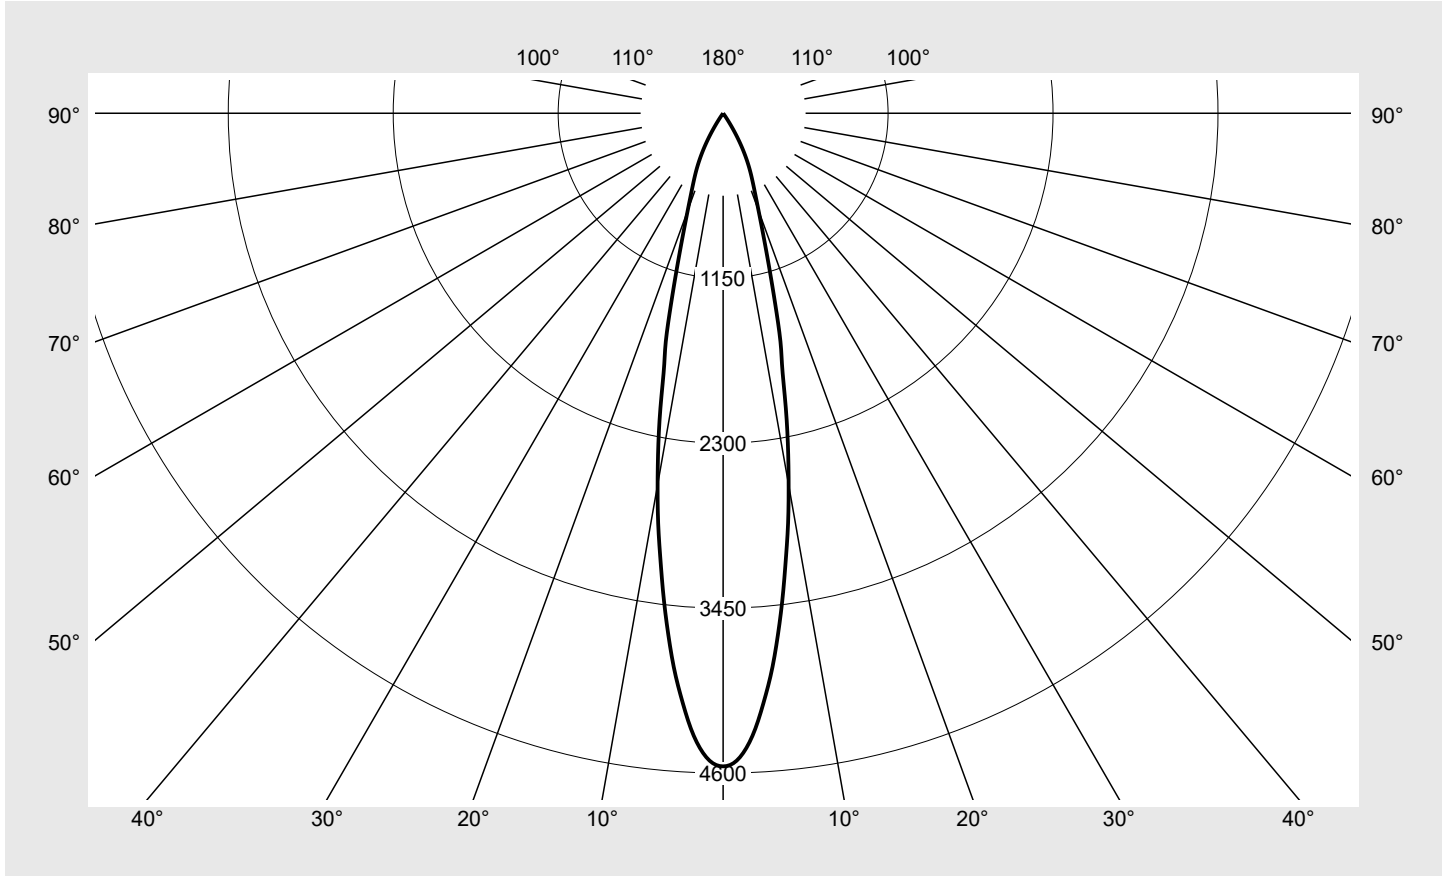

Classifications	
DIN 5040	A 8 0
CIE	N1=98 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Standard	Order number: 51SE62MB11B2C EAN: 4069025447876	LP number 59935_27
-----------------------------------	---	------------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0°	4553.1	1.1	1.1
1°	4526.9	8.7	9.8
2°	4439.5	17.0	26.7
3°	4295.7	24.7	51.4
4°	4103.9	31.4	82.8
5°	3897.2	37.2	120.0
6°	3655.5	41.9	161.9
7°	3402.4	45.5	207.4
8°	3140.8	47.9	255.3
9°	2894.7	49.7	305.0
10°	2630.2	50.1	355.1
11°	2369.8	49.6	404.7
12°	2103.0	47.9	452.6
13°	1837.1	45.3	497.9
14°	1659.8	44.0	542.0
15°	1439.9	130.6	672.5
20°	722.5	135.4	808.0
25°	446.5	103.4	911.4
30°	219.4	60.1	971.5
35°	25.7	8.1	979.6
40°	11.4	4.0	983.6
45°	7.9	3.0	986.7
50°	6.2	2.6	989.3
55°	5.3	2.4	991.7
60°	4.7	2.3	993.9
65°	4.1	2.1	996.0
70°	3.3	1.7	997.7
75°	2.3	1.2	998.9
80°	1.4	0.8	999.7
85°	0.6	0.3	1000.0
90°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE62MB11B2C EAN: 4069025447876	LP number 59935_27
----------------------------	---	-----------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	11.2	12.1	11.5	12.4	12.8	11.2	12.1	11.5	12.4	12.8
	3H	11.8	12.6	12.1	12.9	13.3	11.8	12.6	12.1	12.9	13.3
	4H	12.0	12.8	12.4	13.1	13.5	12.0	12.8	12.4	13.1	13.5
	6H	12.2	12.9	12.6	13.3	13.7	12.2	12.9	12.6	13.3	13.7
	8H	12.4	12.9	12.8	13.3	13.7	12.4	12.9	12.8	13.3	13.7
	12H	12.4	12.9	12.8	13.3	13.7	12.4	12.9	12.8	13.3	13.7
4H	2H	11.2	12.0	11.6	12.3	12.7	11.2	12.0	11.6	12.3	12.7
	3H	12.0	12.6	12.4	13.0	13.4	12.0	12.6	12.4	13.0	13.4
	4H	12.3	12.9	12.8	13.3	13.8	12.3	12.9	12.8	13.3	13.8
	6H	12.6	13.1	13.1	13.6	14.1	12.6	13.1	13.1	13.6	14.1
	8H	12.8	13.2	13.3	13.7	14.1	12.8	13.2	13.3	13.7	14.1
	12H	12.8	13.2	13.3	13.7	14.2	12.8	13.2	13.3	13.7	14.2
8H	4H	12.5	12.9	12.9	13.3	13.8	12.5	12.9	12.9	13.3	13.8
	6H	12.9	13.2	13.4	13.7	14.2	12.9	13.2	13.4	13.7	14.2
	8H	13.0	13.3	13.5	13.8	14.3	13.0	13.3	13.5	13.8	14.3
	12H	13.1	13.4	13.6	13.9	14.4	13.1	13.4	13.6	13.9	14.4
12H	4H	12.4	12.8	12.9	13.3	13.8	12.4	12.8	12.9	13.3	13.8
	6H	12.8	13.2	13.4	13.6	14.2	12.8	13.2	13.4	13.6	14.2
	8H	13.0	13.3	13.5	13.8	14.4	13.0	13.3	13.5	13.8	14.4

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
------------------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m^2
45°	5919.9
50°	5092.6
55°	4959.4
60°	5044.3
65°	5206.1
70°	5177.5
75°	4769.6
80°	4326.7
85°	3693.6


Photometric test report

Family Spot 21 Standard	Order number: 51SE62MB11B2C EAN: 4069025447876	LP number 59935_27
-----------------------------------	---	------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

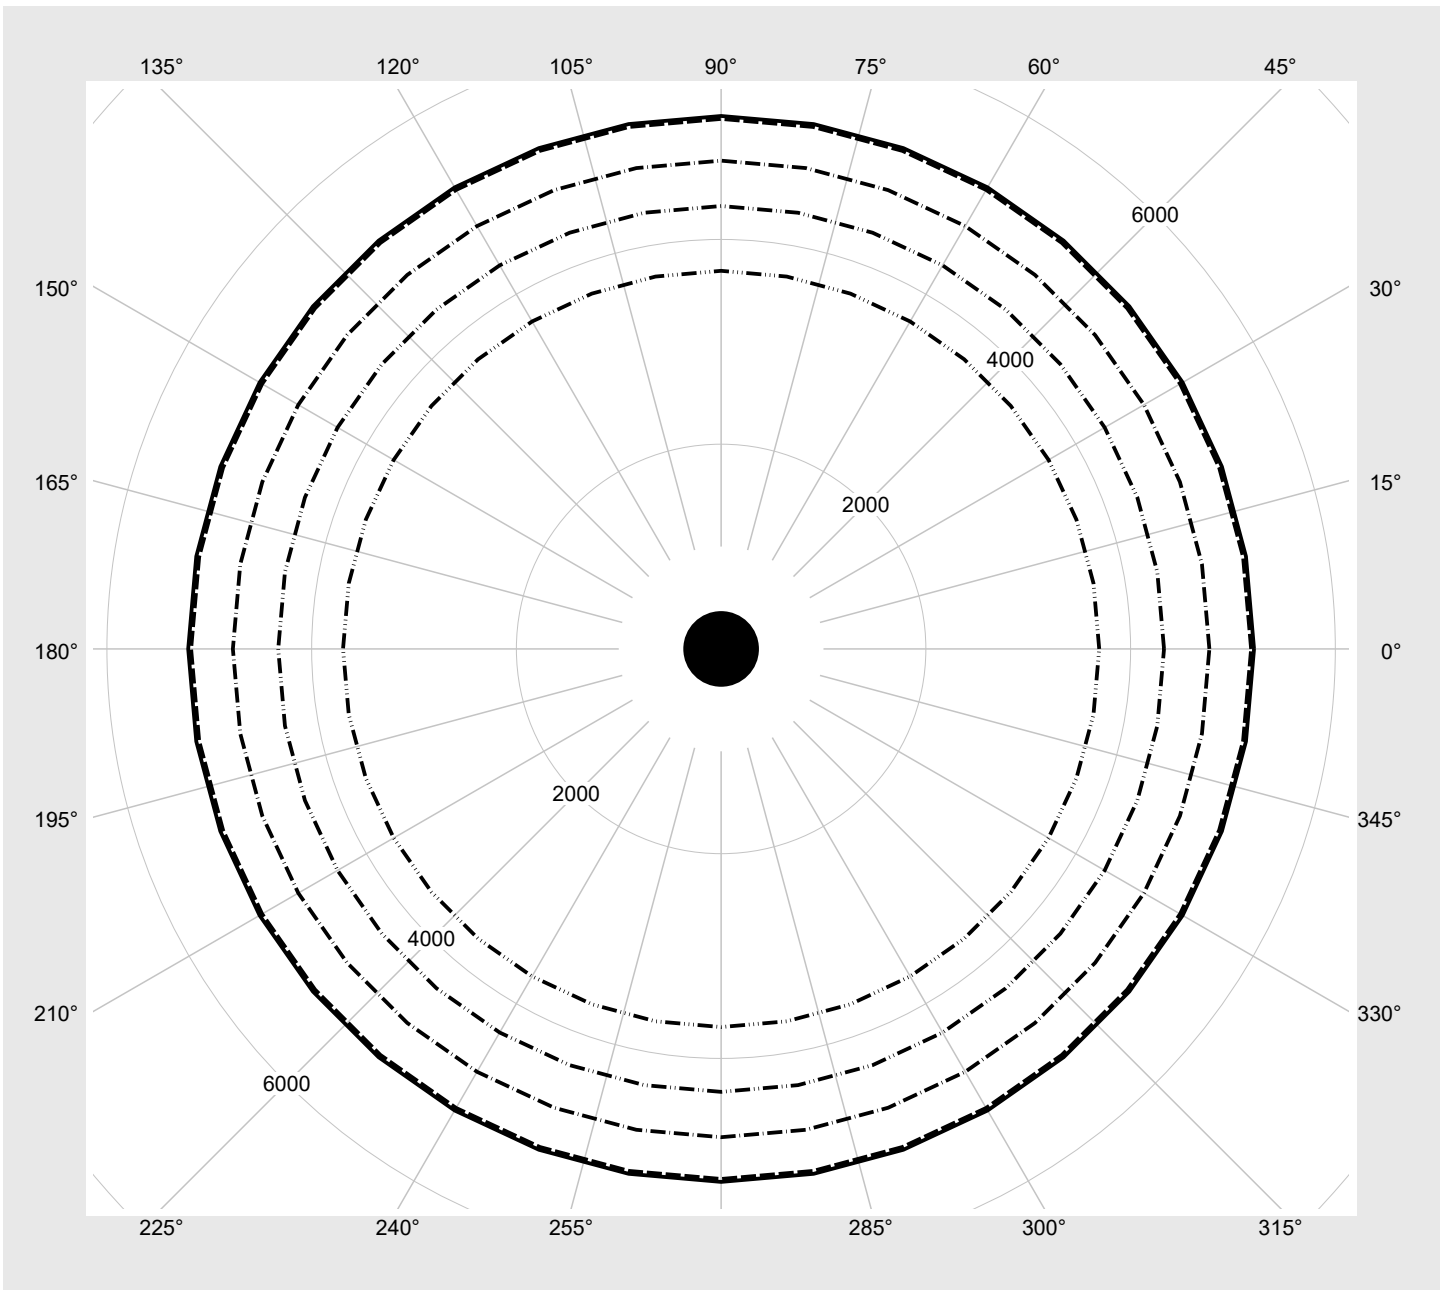

Photometric test report

Family Spot 21 Standard	Order number: 51SE62MB11B2C EAN: 4069025447876	LP number 59935_27
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	3790	26.5
1	ON	OFF	OFF	3550	24.5
2	OFF	ON	OFF	3310	22.5
3	ON	ON	OFF	3070	20.5
4	OFF	OFF	ON	2810	18.5
5	ON	OFF	ON	2560	16.6
6	OFF	ON	ON	2290	14.8
7	ON	ON	ON	2020	12.9