




Photometric test report

Family Spot 21 Standard	Order number: 51SE63DA2EA2C EAN: 4069025447906	LP number 59942_13										
	<table border="0"> <tr> <td>Version</td> <td>housing, white aluminium, reflector, lens PMMA, wide distribution</td> </tr> <tr> <td>Lamps</td> <td>LED 2700 K CRI ≥ 90</td> </tr> <tr> <td>Controlgear</td> <td>ECG-DALI-Multilumen</td> </tr> <tr> <td>Setting</td> <td>factory setting: DIP-Step=5</td> </tr> <tr> <td>Rated values</td> <td>Net luminous flux = 2110 lm Power consumption = 15.6 W Luminous efficacy = 135.3 lm/W</td> </tr> </table>	Version	housing, white aluminium, reflector, lens PMMA, wide distribution	Lamps	LED 2700 K CRI ≥ 90	Controlgear	ECG-DALI-Multilumen	Setting	factory setting: DIP-Step=5	Rated values	Net luminous flux = 2110 lm Power consumption = 15.6 W Luminous efficacy = 135.3 lm/W	serial documentation 11.05.2026 
Version	housing, white aluminium, reflector, lens PMMA, wide distribution											
Lamps	LED 2700 K CRI ≥ 90											
Controlgear	ECG-DALI-Multilumen											
Setting	factory setting: DIP-Step=5											
Rated values	Net luminous flux = 2110 lm Power consumption = 15.6 W Luminous efficacy = 135.3 lm/W											



Classifications	
DIN 5040	A 8 0
CIE	N1=92 N2=98 N3=100 N4=100 N5=100

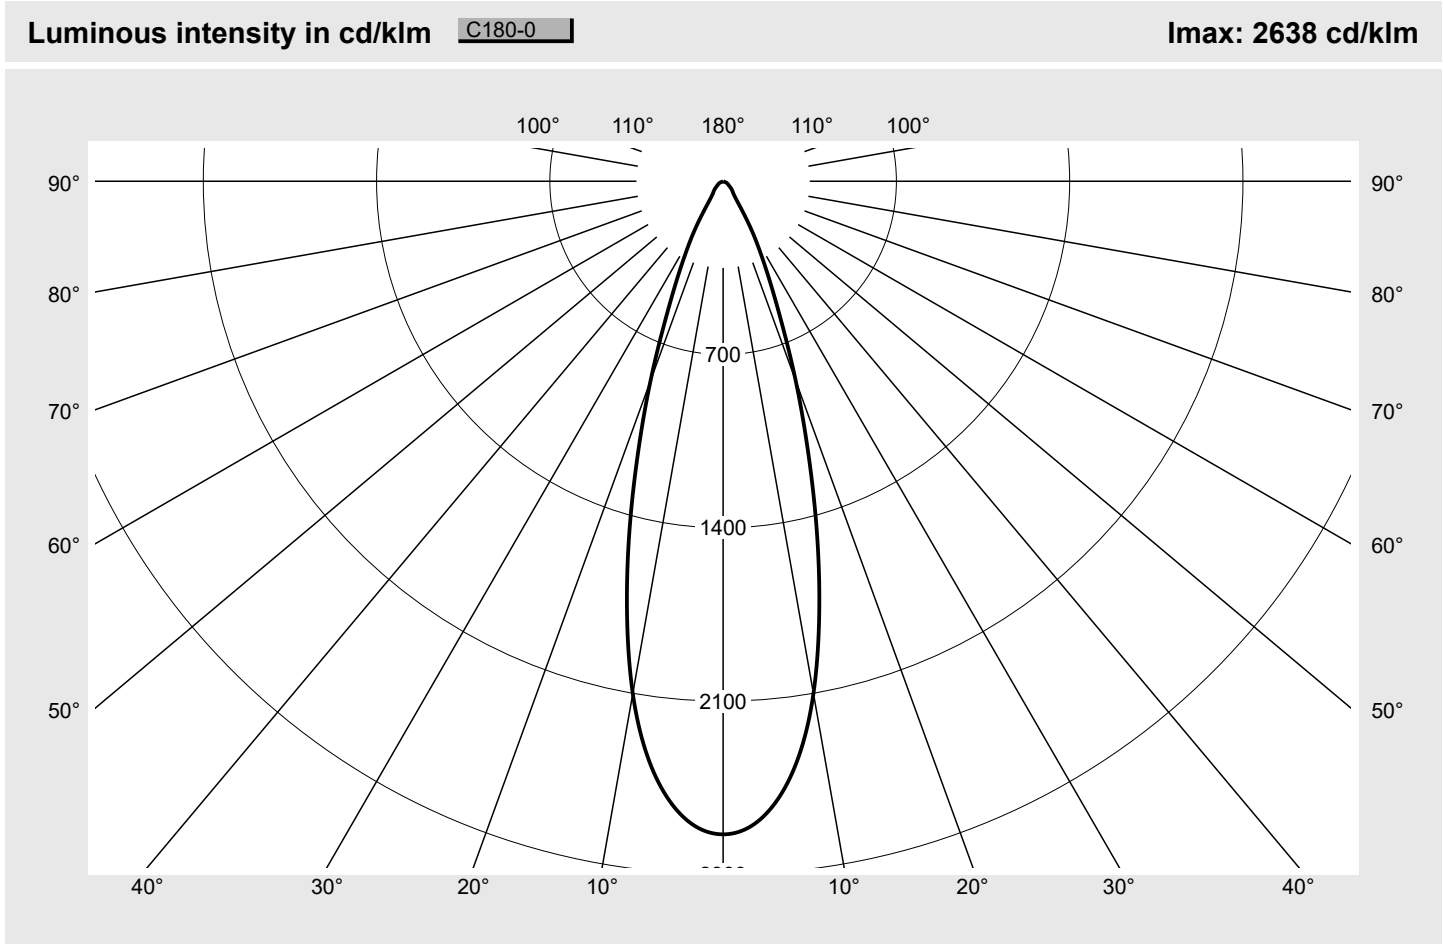Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Standard	Order number: 51SE63DA2EA2C EAN: 4069025447906	LP number 59942_13
-----------------------------------	---	------------------------------

siteco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2638.3	3.9	3.9
2,5°	2607.2	31.2	35.1
5,0°	2509.4	60.0	95.1
7,5°	2342.7	83.8	178.9
10,0°	2101.4	100.0	278.9
12,5°	1793.5	106.4	385.4
15,0°	1462.2	103.7	489.1
17,5°	1137.7	93.8	582.9
20,0°	857.0	80.4	663.2
22,5°	616.7	64.7	727.9
25,0°	449.1	52.0	780.0
27,5°	328.3	41.6	821.5
30,0°	236.7	32.4	854.0
32,5°	154.3	22.7	876.7
35,0°	101.7	16.0	892.7
37,5°	76.7	12.8	905.5
40,0°	64.2	11.3	916.8
42,5°	57.3	10.6	927.4
45,0°	51.1	9.9	937.3
47,5°	44.6	9.0	946.3
50,0°	37.9	8.0	954.3
52,5°	31.6	6.9	961.2
55,0°	26.8	6.0	967.2
57,5°	24.1	5.6	972.7
60,0°	21.5	5.1	977.8
62,5°	18.8	4.6	982.4
65,0°	15.7	3.9	986.3
67,5°	12.6	3.2	989.5
70,0°	10.1	2.6	992.1
72,5°	8.3	2.2	994.3
75,0°	6.8	1.8	996.1
77,5°	5.4	1.5	997.5
80,0°	4.1	1.1	998.7
82,5°	2.8	0.8	999.4
85,0°	1.6	0.4	999.9
87,5°	0.5	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE63DA2EA2C EAN: 4069025447906	LP number 59942_13
-----------------------------------	---	------------------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	20.0	21.1	20.4	21.4	21.7	20.0	21.1	20.4	21.4	21.7
	3H	20.6	21.6	21.0	21.9	22.3	20.6	21.6	21.0	21.9	22.3
	4H	20.9	21.7	21.3	22.1	22.5	20.9	21.7	21.3	22.1	22.5
	6H	21.1	21.8	21.5	22.2	22.6	21.1	21.8	21.5	22.2	22.6
	8H	21.2	21.8	21.7	22.2	22.6	21.2	21.8	21.7	22.2	22.6
	12H	21.2	21.8	21.7	22.2	22.6	21.2	21.8	21.7	22.2	22.6
4H	2H	20.3	21.1	20.7	21.5	21.9	20.3	21.1	20.7	21.5	21.9
	3H	21.0	21.7	21.5	22.1	22.6	21.0	21.7	21.5	22.1	22.6
	4H	21.3	22.0	21.8	22.4	22.8	21.3	22.0	21.8	22.4	22.8
	6H	21.6	22.1	22.1	22.6	23.0	21.6	22.1	22.1	22.6	23.0
	8H	21.7	22.2	22.2	22.6	23.1	21.7	22.2	22.2	22.6	23.1
	12H	21.8	22.1	22.3	22.6	23.1	21.8	22.1	22.3	22.6	23.1
8H	4H	21.4	21.9	21.9	22.3	22.8	21.4	21.9	21.9	22.3	22.8
	6H	21.8	22.1	22.3	22.6	23.1	21.8	22.1	22.3	22.6	23.1
	8H	21.9	22.2	22.4	22.7	23.2	21.9	22.2	22.4	22.7	23.2
	12H	22.0	22.2	22.5	22.7	23.3	22.0	22.2	22.5	22.7	23.3
12H	4H	21.4	21.8	21.9	22.3	22.8	21.4	21.8	21.9	22.3	22.8
	6H	21.8	22.1	22.3	22.6	23.1	21.8	22.1	22.3	22.6	23.1
	8H	21.9	22.2	22.5	22.7	23.2	21.9	22.2	22.5	22.7	23.2

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 62
------------------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45,0°	50497.4
50,0°	41252.5
55,0°	32655.2
60,0°	30024.3
65,0°	25895.5
70,0°	20716.2
75,0°	18429.6
80,0°	16561.8
85,0°	12878.3


Photometric test report

Family Spot 21 Standard	Order number: 51SE63DA2EA2C EAN: 4069025447906	LP number 59942_13
-----------------------------------	---	------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

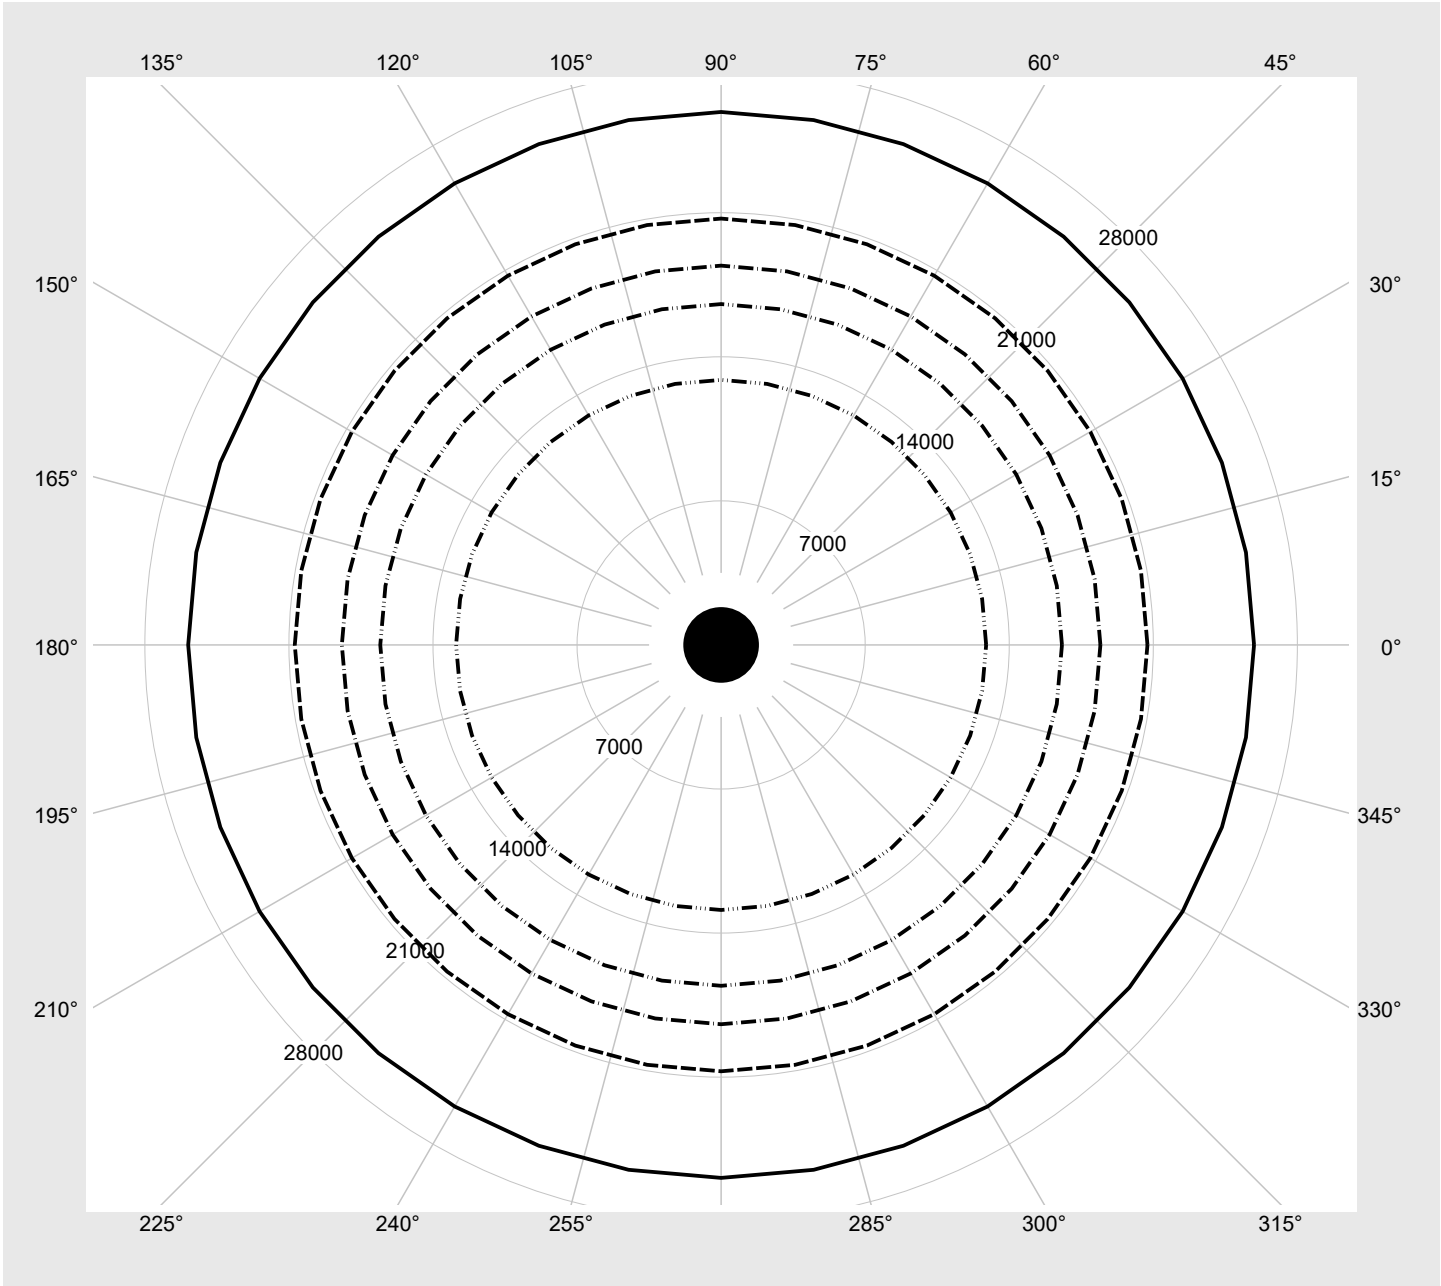

Photometric test report

Family Spot 21 Standard	Order number: 51SE63DA2EA2C EAN: 4069025447906	LP number 59942_13
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
11	ON	OFF	ON	ON	3480	28.0
10	ON	OFF	ON	OFF	3260	25.8
9	ON	OFF	OFF	ON	3040	23.7
8	ON	OFF	OFF	OFF	2820	21.6
7	OFF	ON	ON	ON	2590	19.8
6	OFF	ON	ON	OFF	2350	17.7
5	OFF	ON	OFF	ON	2110	15.6
4	OFF	ON	OFF	OFF	1860	13.8
3	OFF	OFF	ON	ON	1610	11.7
2	OFF	OFF	ON	OFF	1350	9.9
1	OFF	OFF	OFF	ON	1090	8.0
0	OFF	OFF	OFF	OFF	820	6.2