




Photometric test report

Family Spot 21 Standard	Order number: 51SE63MB11A2C EAN: 4069025448026	LP number 59936_25										
	<table border="0"> <tr> <td>Version</td> <td>housing, white aluminium, reflector, cover glass, transparent, medium distribution</td> </tr> <tr> <td>Lamps</td> <td>LED 2700 K CRI ≥ 90</td> </tr> <tr> <td>Controlgear</td> <td>ECG Multilumen</td> </tr> <tr> <td>Setting</td> <td>factory setting: DIP-Step=4</td> </tr> <tr> <td>Rated values</td> <td> Net luminous flux = 2670 lm Power consumption = 18.5 W Luminous efficacy = 144.3 lm/W </td> </tr> </table>	Version	housing, white aluminium, reflector, cover glass, transparent, medium distribution	Lamps	LED 2700 K CRI ≥ 90	Controlgear	ECG Multilumen	Setting	factory setting: DIP-Step=4	Rated values	Net luminous flux = 2670 lm Power consumption = 18.5 W Luminous efficacy = 144.3 lm/W	serial documentation 11.05.2026 
Version	housing, white aluminium, reflector, cover glass, transparent, medium distribution											
Lamps	LED 2700 K CRI ≥ 90											
Controlgear	ECG Multilumen											
Setting	factory setting: DIP-Step=4											
Rated values	Net luminous flux = 2670 lm Power consumption = 18.5 W Luminous efficacy = 144.3 lm/W											



Classifications	
DIN 5040	A 8 0
CIE	N1=98 N2=99 N3=100 N4=100 N5=100

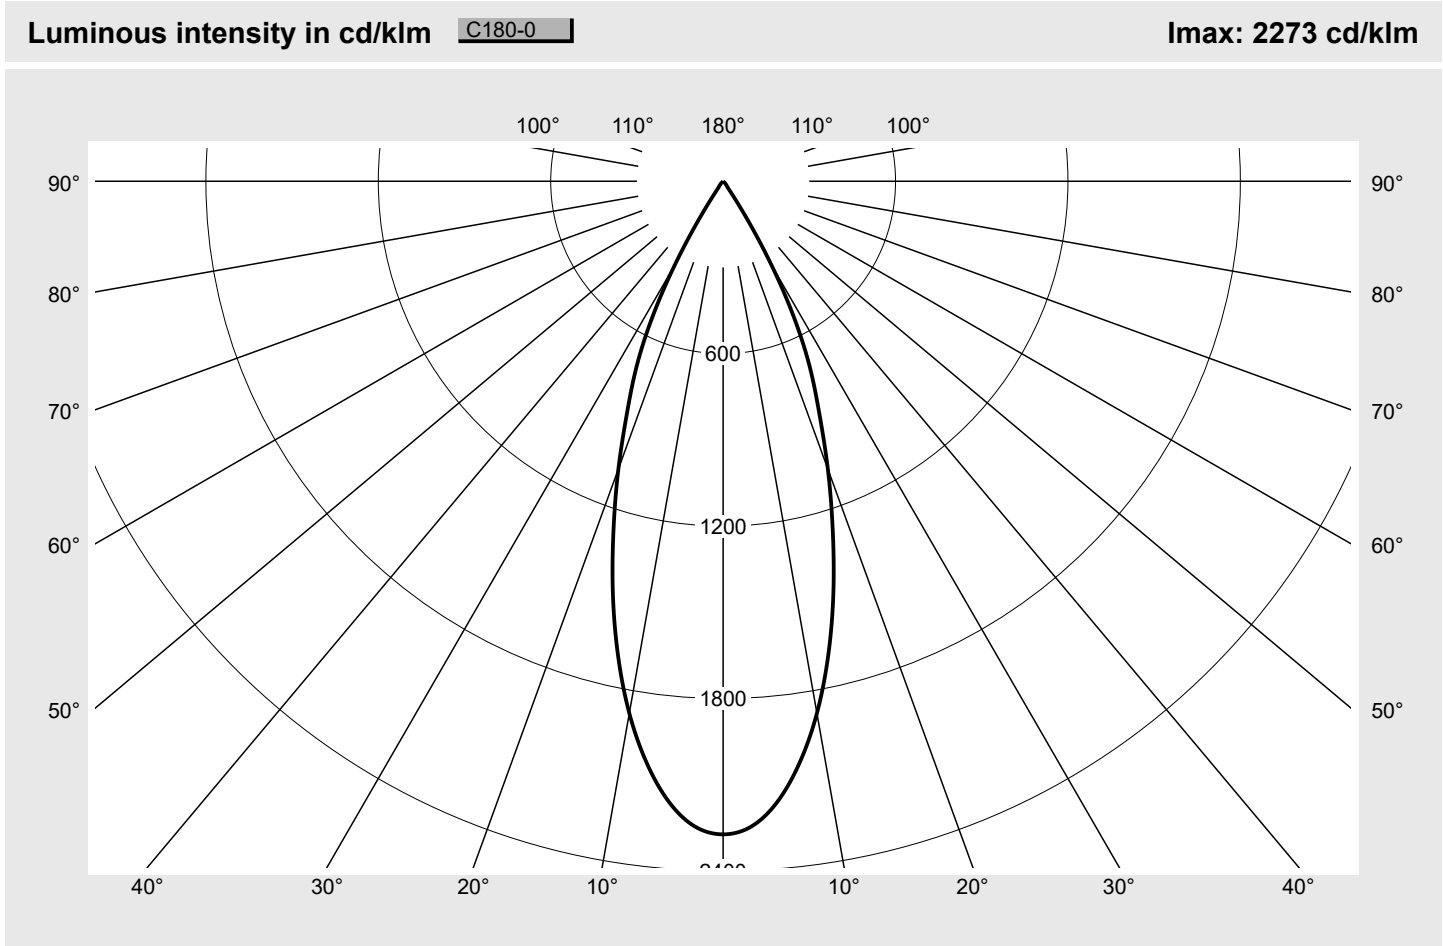Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Standard	Order number: 51SE63MB11A2C EAN: 4069025448026	LP number 59936_25
-----------------------------------	---	------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2272.8	3.4	3.4
2,5°	2247.7	26.9	30.3
5,0°	2167.7	51.8	82.1
7,5°	2040.8	73.0	155.1
10,0°	1880.0	89.5	244.6
12,5°	1690.1	100.3	344.9
15,0°	1482.7	105.2	450.1
17,5°	1267.9	104.5	554.6
20,0°	1065.6	99.9	654.5
22,5°	874.9	91.8	746.3
25,0°	714.3	82.8	829.0
27,5°	533.8	67.6	896.6
30,0°	335.3	46.0	942.6
32,5°	151.5	22.3	964.9
35,0°	44.0	6.9	971.8
37,5°	23.3	3.9	975.7
40,0°	17.4	3.1	978.7
42,5°	13.8	2.6	981.3
45,0°	11.3	2.2	983.5
47,5°	9.4	1.9	985.4
50,0°	8.2	1.7	987.1
52,5°	7.3	1.6	988.7
55,0°	6.6	1.5	990.2
57,5°	6.0	1.4	991.6
60,0°	5.5	1.3	992.9
62,5°	5.0	1.2	994.1
65,0°	4.6	1.1	995.3
67,5°	4.1	1.0	996.3
70,0°	3.6	0.9	997.2
72,5°	3.0	0.8	998.0
75,0°	2.3	0.6	998.6
77,5°	1.8	0.5	999.1
80,0°	1.4	0.4	999.5
82,5°	1.0	0.3	999.8
85,0°	0.6	0.2	999.9
87,5°	0.2	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE63MB11A2C EAN: 4069025448026	LP number 59936_25
----------------------------	---	-----------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	13.5	14.6	13.9	14.9	15.2	13.5	14.6	13.9	14.9	15.2
	3H	13.8	14.7	14.2	15.0	15.4	13.8	14.7	14.2	15.0	15.4
	4H	13.9	14.7	14.3	15.1	15.5	13.9	14.7	14.3	15.1	15.5
	6H	14.0	14.7	14.4	15.1	15.5	14.0	14.7	14.4	15.1	15.5
	8H	14.2	14.7	14.6	15.1	15.5	14.2	14.7	14.6	15.1	15.5
	12H	14.2	14.6	14.6	15.0	15.5	14.2	14.6	14.6	15.0	15.5
4H	2H	13.5	14.3	13.9	14.6	15.0	13.5	14.3	13.9	14.6	15.0
	3H	13.9	14.5	14.3	14.9	15.3	13.9	14.5	14.3	14.9	15.3
	4H	14.0	14.6	14.5	15.0	15.5	14.0	14.6	14.5	15.0	15.5
	6H	14.2	14.7	14.6	15.1	15.6	14.2	14.7	14.6	15.1	15.6
	8H	14.3	14.7	14.7	15.1	15.6	14.3	14.7	14.7	15.1	15.6
	12H	14.3	14.6	14.8	15.1	15.6	14.3	14.6	14.8	15.1	15.6
8H	4H	14.1	14.5	14.5	14.9	15.4	14.1	14.5	14.5	14.9	15.4
	6H	14.3	14.6	14.8	15.1	15.6	14.3	14.6	14.8	15.1	15.6
	8H	14.3	14.6	14.8	15.1	15.7	14.3	14.6	14.8	15.1	15.7
	12H	14.4	14.6	14.9	15.1	15.7	14.4	14.6	14.9	15.1	15.7
12H	4H	14.1	14.4	14.6	14.9	15.4	14.1	14.4	14.6	14.9	15.4
	6H	14.3	14.5	14.8	15.0	15.6	14.3	14.5	14.8	15.0	15.6
	8H	14.3	14.6	14.9	15.1	15.6	14.3	14.6	14.9	15.1	15.6


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
-----------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45,0°	8104.6
50,0°	6469.4
55,0°	5835.3
60,0°	5578.6
65,0°	5519.8
70,0°	5337.9
75,0°	4506.6
80,0°	4087.8
85,0°	3492.2

Photometric test report

Family Spot 21 Standard	Order number: 51SE63MB11A2C EAN: 4069025448026	LP number 59936_25
-----------------------------------	---	------------------------------

Luminance values in cd/m²
γ 65°
γ 70°
γ 75°
γ 80°
γ 85°
siteco

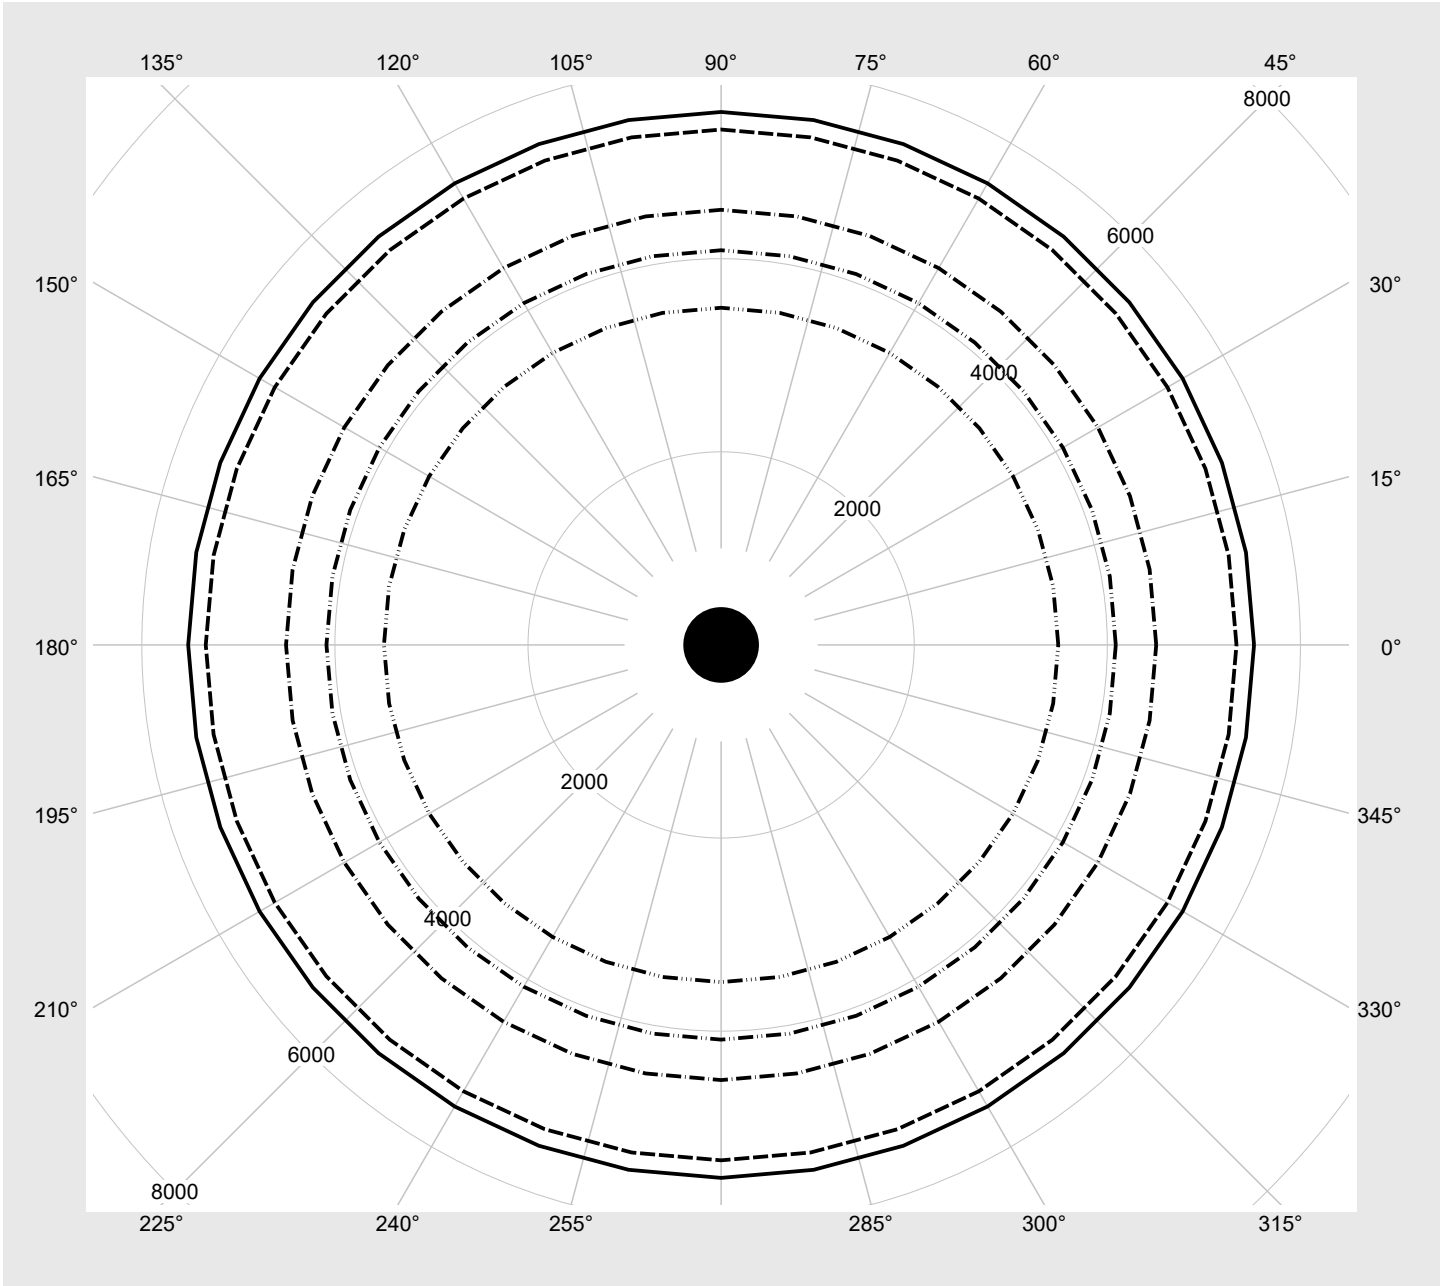

Photometric test report

Family Spot 21 Standard	Order number: 51SE63MB11A2C EAN: 4069025448026	LP number 59936_25
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	3590	26.5
1	ON	OFF	OFF	3370	24.5
2	OFF	ON	OFF	3140	22.5
3	ON	ON	OFF	2900	20.5
4	OFF	OFF	ON	2670	18.5
5	ON	OFF	ON	2420	16.6
6	OFF	ON	ON	2170	14.8
7	ON	ON	ON	1920	12.9