

Photometric test report

Family Spot 21 Standard



Order number: 51SE64DB11C2C
EAN: 4069025448095

**LP number
59937_31**

Version	housing, white aluminium, reflector, cover glass, transparent, wide distribution
Lamps	LED 3500 K CRI ≥ 90
Controlgear	ECG-DALI-Multilumen
Setting	factory setting: DIP-Step=7
Rated values	Net luminous flux = 2820 lm Power consumption = 19.8 W Luminous efficacy = 142.4 lm/W


**serial
documentation
11.05.2026**

sitEco

Luminous intensity in cd/klm

C180-0

Imax: 1410 cd/klm

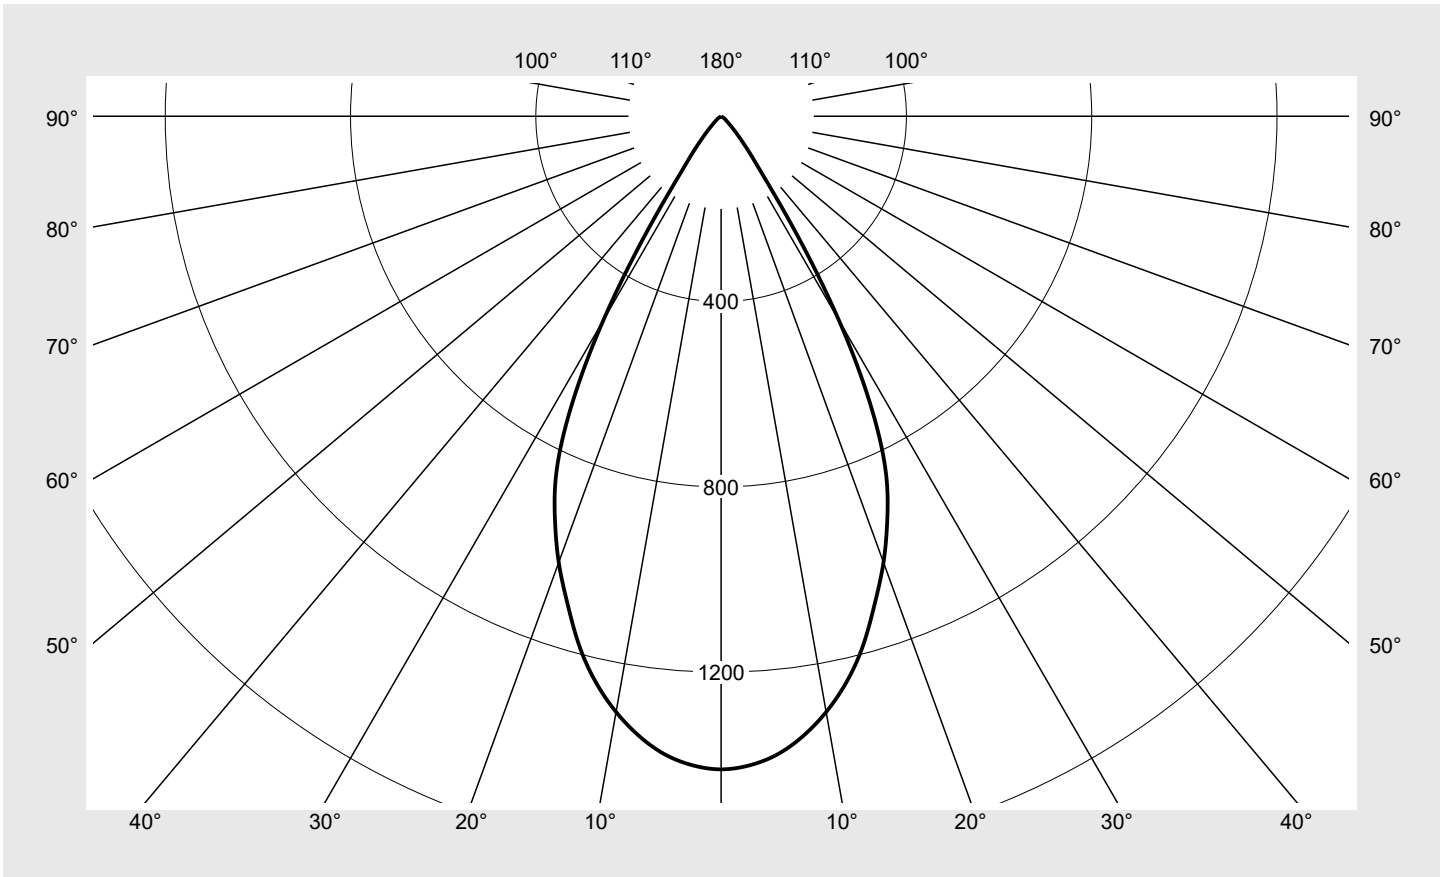

Classifications

DIN 5040 A 7 0
CIE N1=96 N2=99 N3=100
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Standard	Order number: 51SE64DB11C2C EAN: 4069025448095	LP number 59937_31
-----------------------------------	---	------------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	1409.8	2.1	2.1
2,5°	1402.5	16.8	18.9
5,0°	1383.3	33.0	51.9
7,5°	1350.1	48.3	100.2
10,0°	1305.8	62.2	162.4
12,5°	1250.9	74.2	236.6
15,0°	1183.2	84.0	320.6
17,5°	1103.1	90.9	411.5
20,0°	1024.9	96.1	507.6
22,5°	937.8	98.4	606.0
25,0°	838.9	97.2	703.2
27,5°	692.9	87.7	790.9
30,0°	508.4	69.7	860.5
32,5°	313.6	46.2	906.7
35,0°	170.0	26.7	933.5
37,5°	107.2	17.9	951.4
40,0°	69.8	12.3	963.7
42,5°	45.7	8.5	972.1
45,0°	29.8	5.8	977.9
47,5°	20.8	4.2	982.1
50,0°	15.0	3.2	985.3
52,5°	11.4	2.5	987.7
55,0°	9.1	2.0	989.8
57,5°	7.4	1.7	991.5
60,0°	6.2	1.5	993.0
62,5°	5.4	1.3	994.3
65,0°	4.6	1.1	995.4
67,5°	4.0	1.0	996.5
70,0°	3.5	0.9	997.4
72,5°	2.9	0.8	998.1
75,0°	2.3	0.6	998.7
77,5°	1.7	0.5	999.2
80,0°	1.3	0.4	999.5
82,5°	0.9	0.2	999.8
85,0°	0.6	0.2	999.9
87,5°	0.2	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Standard	Order number: 51SE64DB11C2C EAN: 4069025448095	LP number 59937_31
----------------------------	---	-----------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.1	20.2	19.4	20.5	20.8	19.1	20.2	19.4	20.5	20.8
	3H	19.0	19.9	19.4	20.3	20.6	19.0	19.9	19.4	20.3	20.6
	4H	18.9	19.8	19.3	20.2	20.6	18.9	19.8	19.3	20.2	20.6
	6H	18.9	19.7	19.3	20.1	20.5	18.9	19.7	19.3	20.1	20.5
	8H	19.0	19.6	19.5	20.0	20.4	19.0	19.6	19.5	20.0	20.4
	12H	19.0	19.5	19.4	19.9	20.4	19.0	19.5	19.4	19.9	20.4
4H	2H	18.9	19.7	19.3	20.1	20.5	18.9	19.7	19.3	20.1	20.5
	3H	18.8	19.5	19.2	19.9	20.3	18.8	19.5	19.2	19.9	20.3
	4H	18.8	19.4	19.2	19.8	20.3	18.8	19.4	19.2	19.8	20.3
	6H	18.7	19.3	19.2	19.7	20.2	18.7	19.3	19.2	19.7	20.2
	8H	18.7	19.2	19.2	19.6	20.1	18.7	19.2	19.2	19.6	20.1
	12H	18.7	19.1	19.2	19.6	20.1	18.7	19.1	19.2	19.6	20.1
8H	4H	18.7	19.1	19.1	19.6	20.1	18.7	19.1	19.1	19.6	20.1
	6H	18.6	19.0	19.1	19.5	20.0	18.6	19.0	19.1	19.5	20.0
	8H	18.6	18.9	19.1	19.4	20.0	18.6	18.9	19.1	19.4	20.0
	12H	18.6	18.9	19.1	19.4	19.9	18.6	18.9	19.1	19.4	19.9
12H	4H	18.7	19.0	19.2	19.5	20.0	18.7	19.0	19.2	19.5	20.0
	6H	18.6	18.9	19.1	19.4	19.9	18.6	18.9	19.1	19.4	19.9
	8H	18.6	18.8	19.1	19.3	19.9	18.6	18.8	19.1	19.3	19.9


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
-----------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45,0°	22470.9
50,0°	12484.3
55,0°	8487.7
60,0°	6634.3
65,0°	5823.6
70,0°	5475.4
75,0°	4753.5
80,0°	4003.8
85,0°	3682.2

Photometric test report

Family Spot 21 Standard	Order number: 51SE64DB11C2C EAN: 4069025448095	LP number 59937_31
-----------------------------------	---	------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

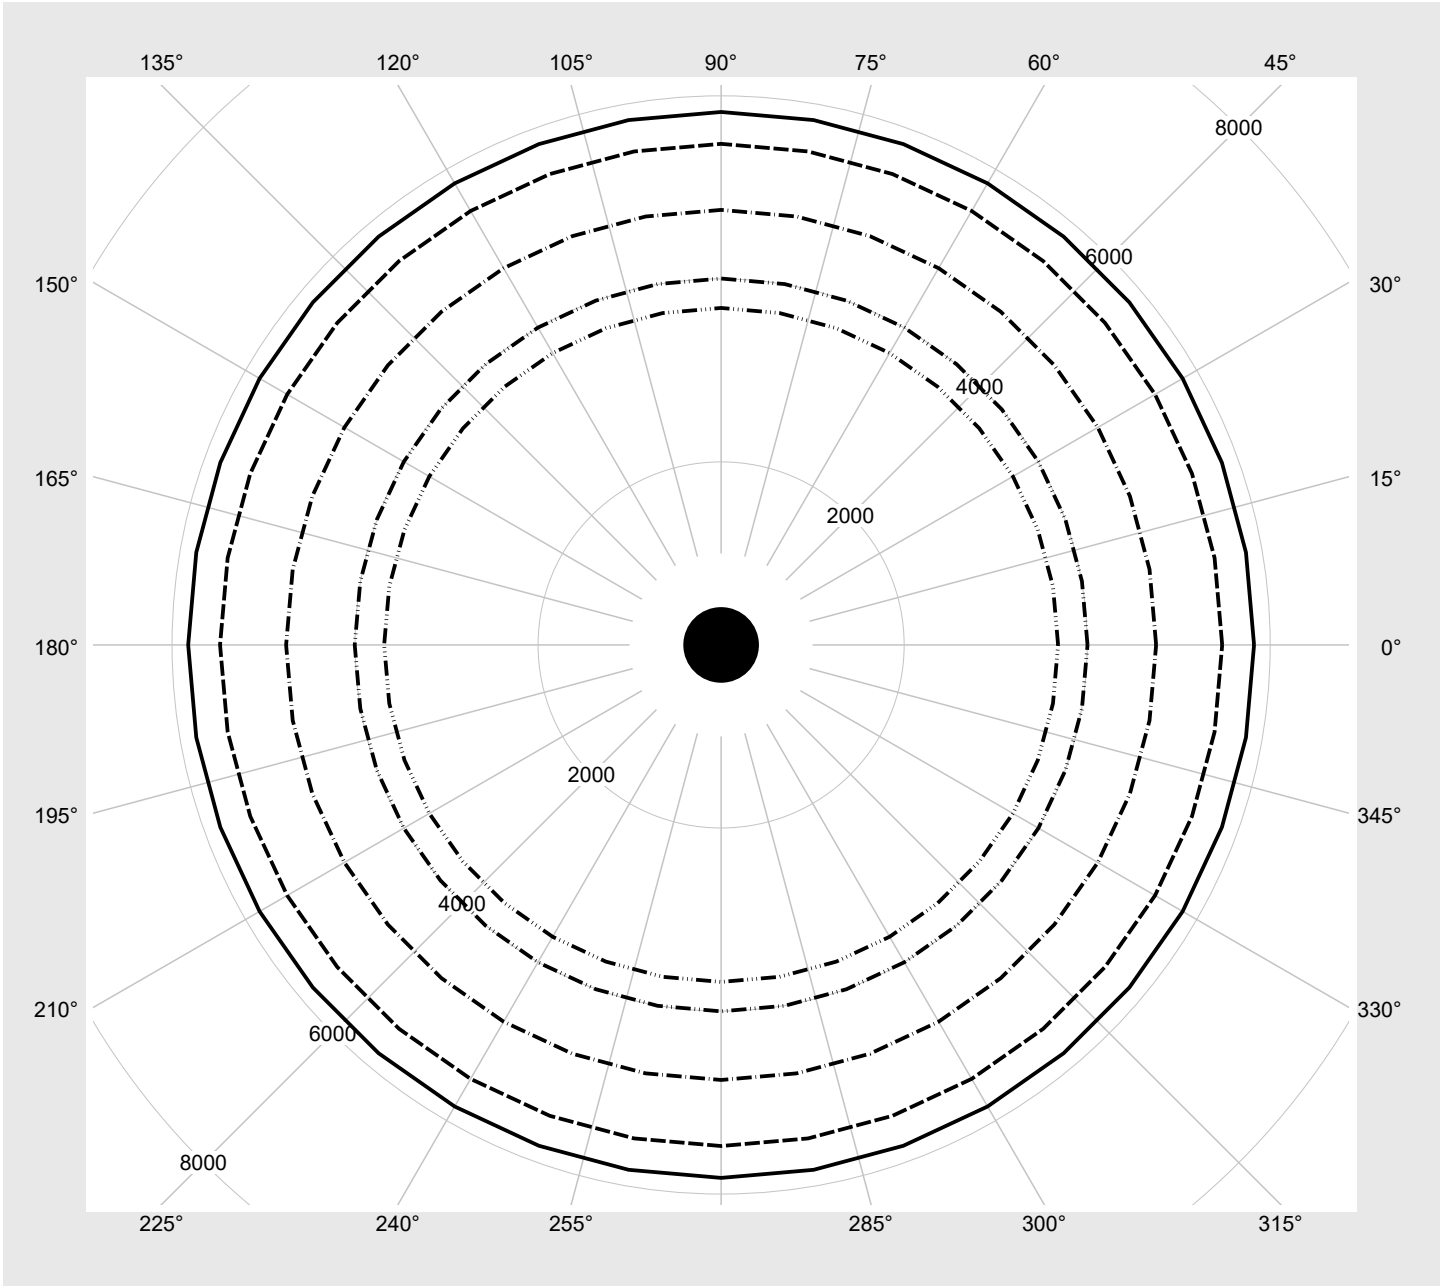

Photometric test report

Family Spot 21 Standard	Order number: 51SE64DB11C2C EAN: 4069025448095	LP number 59937_31
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	siteco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
11	ON	OFF	ON	ON	3800	28.1
10	ON	OFF	ON	OFF	3560	25.9
9	ON	OFF	OFF	ON	3320	23.8
8	ON	OFF	OFF	OFF	3070	21.7
7	OFF	ON	ON	ON	2820	19.8
6	OFF	ON	ON	OFF	2560	17.7
5	OFF	ON	OFF	ON	2300	15.7
4	OFF	ON	OFF	OFF	2030	13.8
3	OFF	OFF	ON	ON	1750	11.7
2	OFF	OFF	ON	OFF	1470	9.9
1	OFF	OFF	OFF	ON	1180	8.1
0	OFF	OFF	OFF	OFF	880	6.2